



### Power supply concept CPX with OVEM

System integration with regard to the power supply concept for the CPX interlinking block and the OVEM are illustrated by several examples in this document.

CPX;  
OVEM

Title ..... Power supply concept CPX with OVEM  
Version ..... 1.10  
Document no. .... 100146  
Original .....en  
Author .....Festo  
  
Last saved ..... 09.05.2017

## Copyright Notice

This documentation is the intellectual property of Festo AG & Co. KG, which also has the exclusive copyright. Any modification of the content, duplication or reprinting of this documentation as well as distribution to third parties can only be made with the express consent of Festo AG & Co. KG.

Festo AG & Co KG reserves the right to make modifications to this document in whole or in part. All brand and product names are trademarks or registered trademarks of their respective owners.

## Legal Notice

Hardware, software, operating systems and drivers may only be used for the applications described and only in conjunction with components recommended by Festo AG & Co. KG.

Festo AG & Co. KG does not accept any liability for damages arising from the use of any incorrect or incomplete information contained in this documentation or any information missing therefrom.

Defects resulting from the improper handling of devices and modules are excluded from the warranty.

The data and information specified in this document should not be used for the implementation of safety functions relating to the protection of personnel and machinery.

No liability is accepted for claims for damages arising from a failure or functional defect. In other respects, the regulations with regard to liability from the terms and conditions of delivery, payment and use of software of Festo AG & Co. KG, which can be found at [www.festo.com](http://www.festo.com) and can be supplied on request, shall apply.

All data contained in this document do not represent guaranteed specifications, particularly with regard to functionality, condition or quality, in the legal sense.

The information in this document serves only as basic information for the implementation of a specific, hypothetical application and is in no way intended as a substitute for the operating instructions of the respective manufacturers and the design and testing of the respective application by the user.

The operating instructions for Festo products can be found at [www.festo.com/sp](http://www.festo.com/sp).

Users of this document (application note) must verify that all functions described here also work correctly in the application. By reading this document and adhering to the specifications contained therein, users are also solely responsible for their own application.

# Table of contents

<b>1</b>	<b>Components/Software used .....</b>	<b>5</b>
1.1	Initial Situation .....	5
<b>2</b>	<b>System supply .....</b>	<b>6</b>
2.1	Power supply concept with one power supply unit .....	6
2.2	Power supply concept with two power supply units .....	6
2.2.1	Common 0V between 0VValves and 0VEL./Sen. ....	6
2.2.2	Electrical isolation between 0V <sub>Valves</sub> and 0V <sub>El./Sen.</sub> .....	7
2.3	An application to avoid with two power supply units .....	7
2.3.1	A "bad" example .....	7
<b>3</b>	<b>Suggested application 1 .....</b>	<b>8</b>
<b>4</b>	<b>Suggested application 2 .....</b>	<b>9</b>
<b>5</b>	<b>Suggested application 3 .....</b>	<b>10</b>
<b>6</b>	<b>An application to avoid .....</b>	<b>11</b>



# 1 Components/Software used

Type/Name	Version Software/Firmware	Date of manufacture
CPX-FB36	--	--
OVEM-...-2P	--	--
CPX-16DE	--	--
CPX-4DA	--	--
DUO-cable	--	--

Table 1.1: 1 Components/Software used

## 1.1 Initial Situation

In the automotive industry, various modules and components are connected to a master controller, which results in a high degree of flexibility with regard to the selection of components for integration into control systems (including choice of manufacturer).

Despite this variety, attention must be paid during system integration to the requirements of the various systems, components and applications involved.

The chapters which follow use a number of examples to describe system integration with regard to the power supply concept between the CPX interlinking block and the OVEM.

## 2 System supply

### 2.1 Power supply concept with one power supply unit

In this example, a CPX interlinking block and the OVEM are both supplied from a common power supply unit. The system supply is fed via a 4-pin M18 or 7/8" plug, a 5-pin 7/8" plug or a 5-pin push/pull plug. For details of pin allocation and further details regarding the CPX power supply, see user documentation .

In the case of a combination of CPX <-> OVEM, the [OVEM](#) is connected to a [CPX input module \(digital\)](#) and a [CPX output module \(digital\)](#). The power supply for the OVEM is fed from the CPX input module (see Suggested application 1).

A single-pole EMERGENCY STOP breaker for the **24V<sub>Valves</sub>/24V<sub>EL./Sen.</sub>** power supply in this suggested application isolates the entire interlinking block and thus also the OVEM from the mains supply.



#### Note

In this application, while the OVEM is isolated from the power supply in the case of an EMERGENCY STOP, it is still possible for gripped workpieces to fall down after a certain delay due to leakage.

### 2.2 Power supply concept with two power supply units

#### 2.2.1 Common 0V between 0V<sub>Valves</sub> and 0V<sub>EL./Sen.</sub>

In this example, a CPX interlinking block and the OVEM are supplied from two power supply units. Potential equalization is achieved by means of a jumper fitted between **0V<sub>Valves</sub>** and **0V<sub>EL./Sen.</sub>**. The system supply is fed via a 5-pin 7/8" plug or a 5-pin push/pull plug. For details of pin allocation and further details regarding the CPX power supply, see user documentation [Terminal CPX](#) and additional documentation [Interlinking block with system supply](#).

In the case of a combination of CPX <-> OVEM, the [OVEM](#) is connected to a [CPX input module \(digital\)](#) and to a [CPX output module \(digital\)](#) which is connected separately via a [Interlinking block with additional power supply for outputs](#). The power supply for the OVEM is taken from the CPX input module (see Suggested application 2).

A single-pole EMERGENCY STOP breaker for the **24V<sub>Valves</sub>** in this suggested application isolates the valves from the mains supply. The OVEM continues to be supplied with power from the **24V<sub>EL./Sen.</sub>** power supply.

In the case of a single-pole EMERGENCY STOP switch-off of the **24V<sub>EL./Sen.</sub>**, please note Chapter [2.1](#) .



#### Note

In this application, the OVEM is not affected by the EMERGENCY STOP switch-off of the **24V<sub>Valves</sub>**, while the valves are isolated from the main supply. However, since the compressed air supply for the OVEM ceases, it is still possible for gripped workpieces to fall down after a certain delay due to leakage. A possible solution would be to use OE valves (normally open) if possible.

### 2.2.2 Electrical isolation between $0V_{\text{Valves}}$ and $0V_{\text{EL./Sen.}}$ .

In this example, a CPX interlinking block and the OVEM are supplied from two power supply units. In this suggested application, the electrical isolation of the electrical potentials must not exceed the maximum permissible limits ([see specification](#)). The system power supply is fed via a 5-pin 7/8" plug or as 5-pin push/pull plug. For details of pin allocation and further details regarding the CPX power supply, see user documentation [Terminal CPX](#) and additional documentation [Interlinking block with system supply](#).

In the case of a combination of CPX <-> OVEM, the [OVEM](#) is connected to a [CPX input module \(digital\)](#) and to a [Interlinking block with additional power supply for outputs](#) which is connected separately via a [CPX output module \(digital\)](#). The power supply for the OVEM is taken from the CPX input module (see Suggested application 3).

An all-pole EMERGENCY STOP switch-off of the  $24V_{\text{Valves}}$  and  $0V_{\text{Valves}}$ . In this suggested application, the valves are isolated from the power supply. However, the OVEM continues to be supplied with power from the  $24V_{\text{EL./Sen.}}$  power supply.

In the case of an all-pole EMERGENCY STOP switch-off of the  $24V_{\text{EL./Sen.}}$  power supply, please note Chapter [2.1](#).



#### Note

In this application, the OVEM is not affected by the EMERGENCY STOP switch-off of the  $24V_{\text{Valves}}$ , while the valves are isolated from the main supply. However, since the compressed air supply for the OVEM ceases, it is still possible for gripped workpieces to fall down after a certain delay due to leakage. A possible solution would be to use OE valves (normally open) if possible.

## 2.3 An application to avoid with two power supply units

### 2.3.1 A "bad" example


In this example, a CPX interlinking block and the OVEM are supplied from two power supply units. Potential equalization is achieved by means of a jumper fitted between  $0V_{\text{Valves}}$  and  $0V_{\text{EL./Sen.}}$ . The system supply is fed via a 5-pin 7/8" plug or a 5-pin push/pull plug. For details of pin allocation and further details regarding the CPX power supply, see user documentation [Terminal CPX](#) and additional documentation [Interlinking block with system supply](#).

With this combination of CPX <-> OVEM, the [OVEM](#) is connected to a [CPX input module \(digital\)](#) and a [CPX output module \(digital\)](#). The power supply for the OVEM is taken from the CPX input module, see An application to avoid.

A single-pole EMERGENCY STOP breaker for the  $24V_{\text{Valves}}$  in this suggested application isolates the valves from the mains supply. The OVEM continues to be supplied from the  $24V_{\text{EL./Sen.}}$  while the output module CPX-4DA is isolated from the mains supply. This results in a status change at the OVEM input DI1. This status change ensures that, in the case of an EMERGENCY STOP, any gripped workpiece will be ejected.

### 3 Suggested application 1

Using **one** power supply unit and a single-pole switch-off

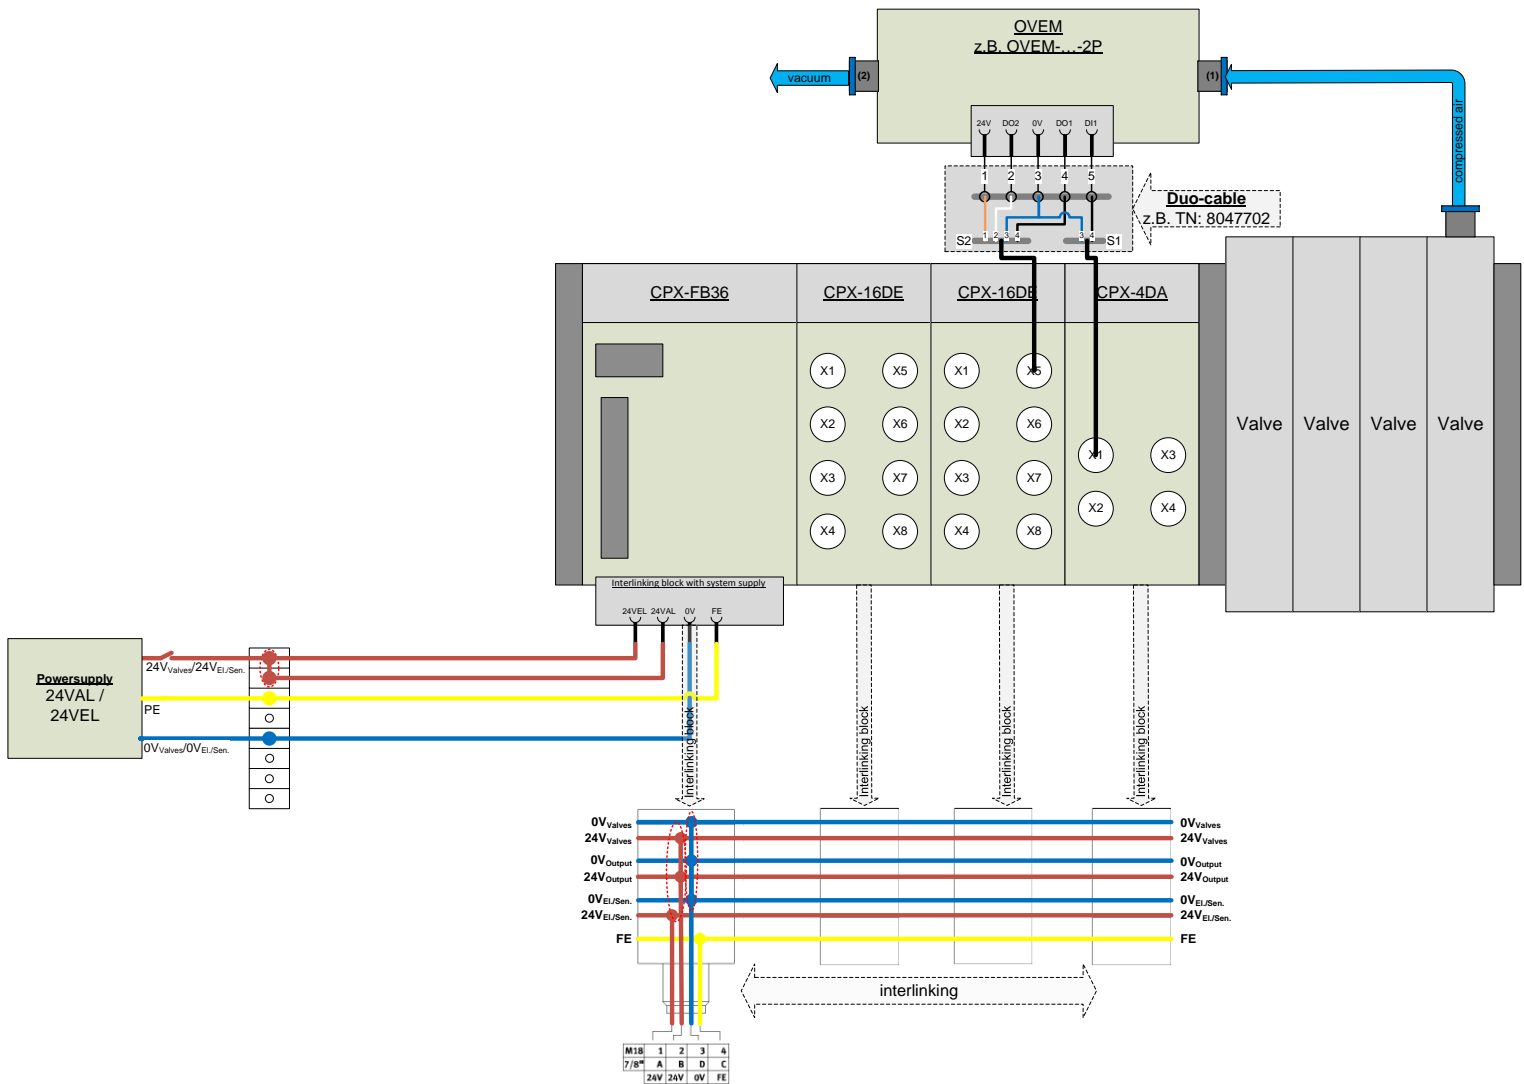


**Note**  
 In this example, the entire CPX interlinking block is supplied from a common **24V<sub>Valves</sub> / 24V<sub>EL./Sen.</sub>** power supply. The OVEM is therefore at **24V<sub>Valves</sub> / 24V<sub>EL./Sen.</sub>** potential. If on the occasion of an EMERGENCY STOP switch-off, the **24V<sub>Valves</sub> / 24V<sub>EL./Sen.</sub>** supply is interrupted (single-pole), the entire CPX interlinking block is powered down. The OVEM will **not** generate an ejector pulse as the result of the switch-off of the **24V<sub>Valves</sub> / 24V<sub>EL./Sen.</sub>** power supply.



## 4 Suggested application 2

Using two power supply units with a common 0V and a single-pole switch-off

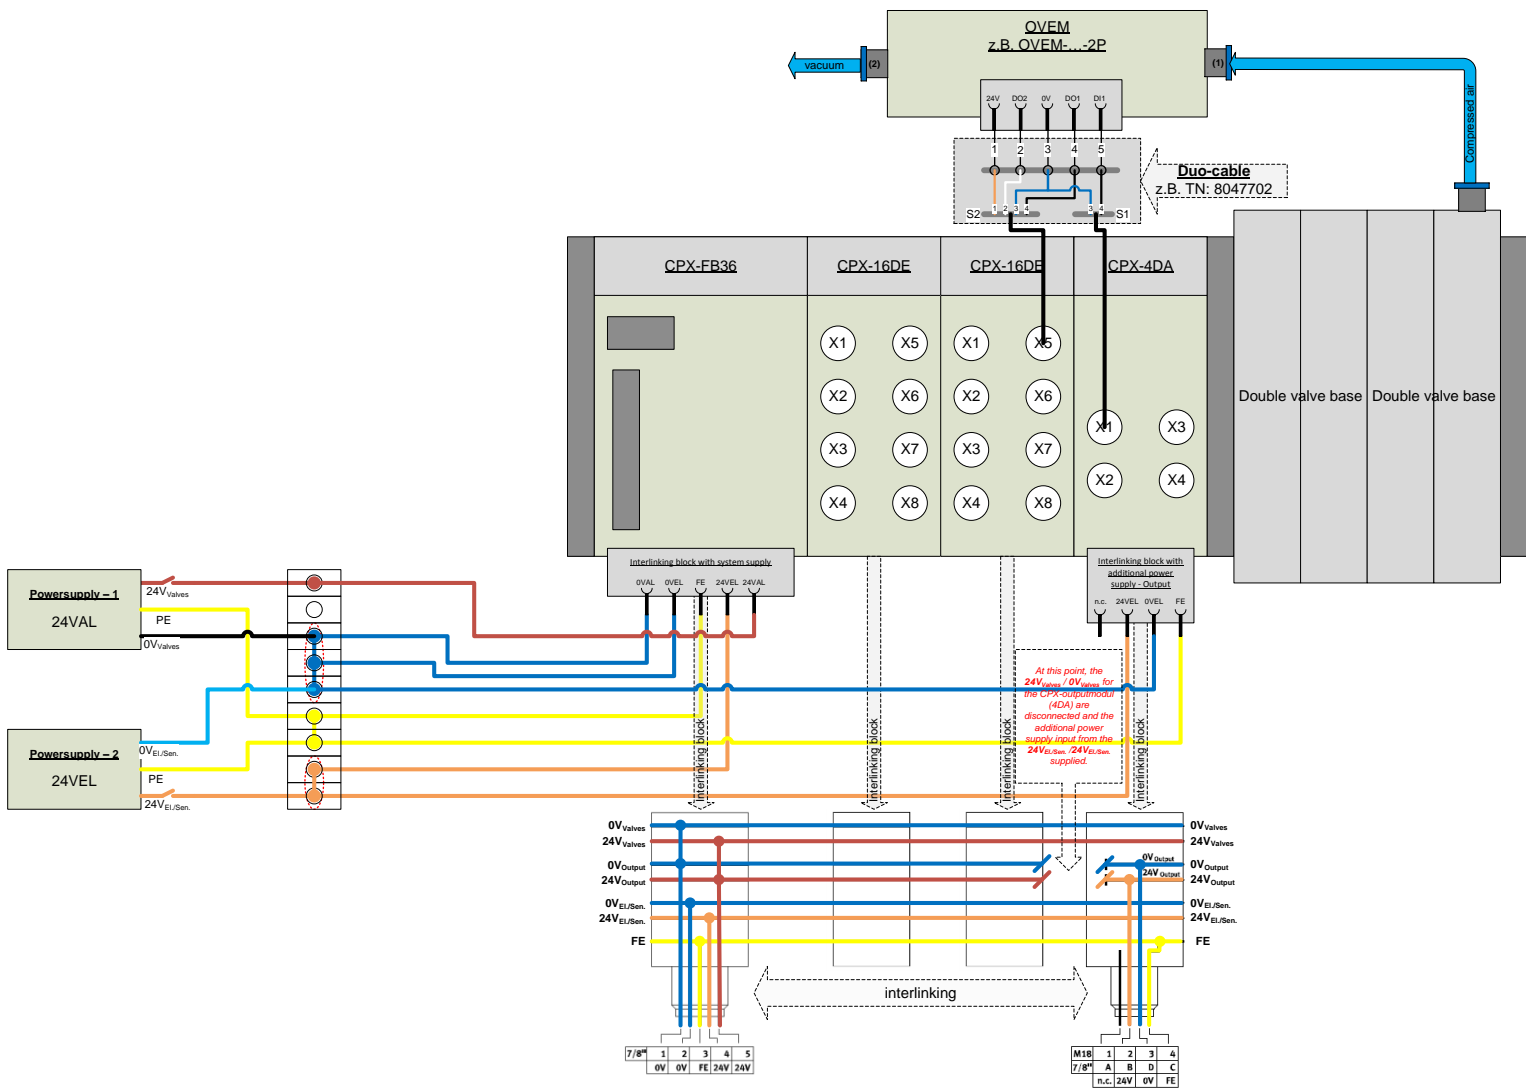

### Note

Due to the additional power supply, the power supply for the CPX-4DA module is isolated from the 24V Valves power supply and **must** be connected to the 24V El./Sen. power supply when a combination OVEM<->CPX is used. This will ensure that the OVEM is at a "clean" 24V El./Sen. potential. In the case of an EMERGENCY STOP switch-off of the 24V Valves supply (single-pole), the OVEM does **not** generate an injector pulse.


### information



In this combination, the additional power supply for the CPX-4DA module, which is used to activate the OVEM, must be installed as the last component of the interlinking block.

## 5 Suggested application 3

Using two power supply units with separate 0V and all-pole switch-off

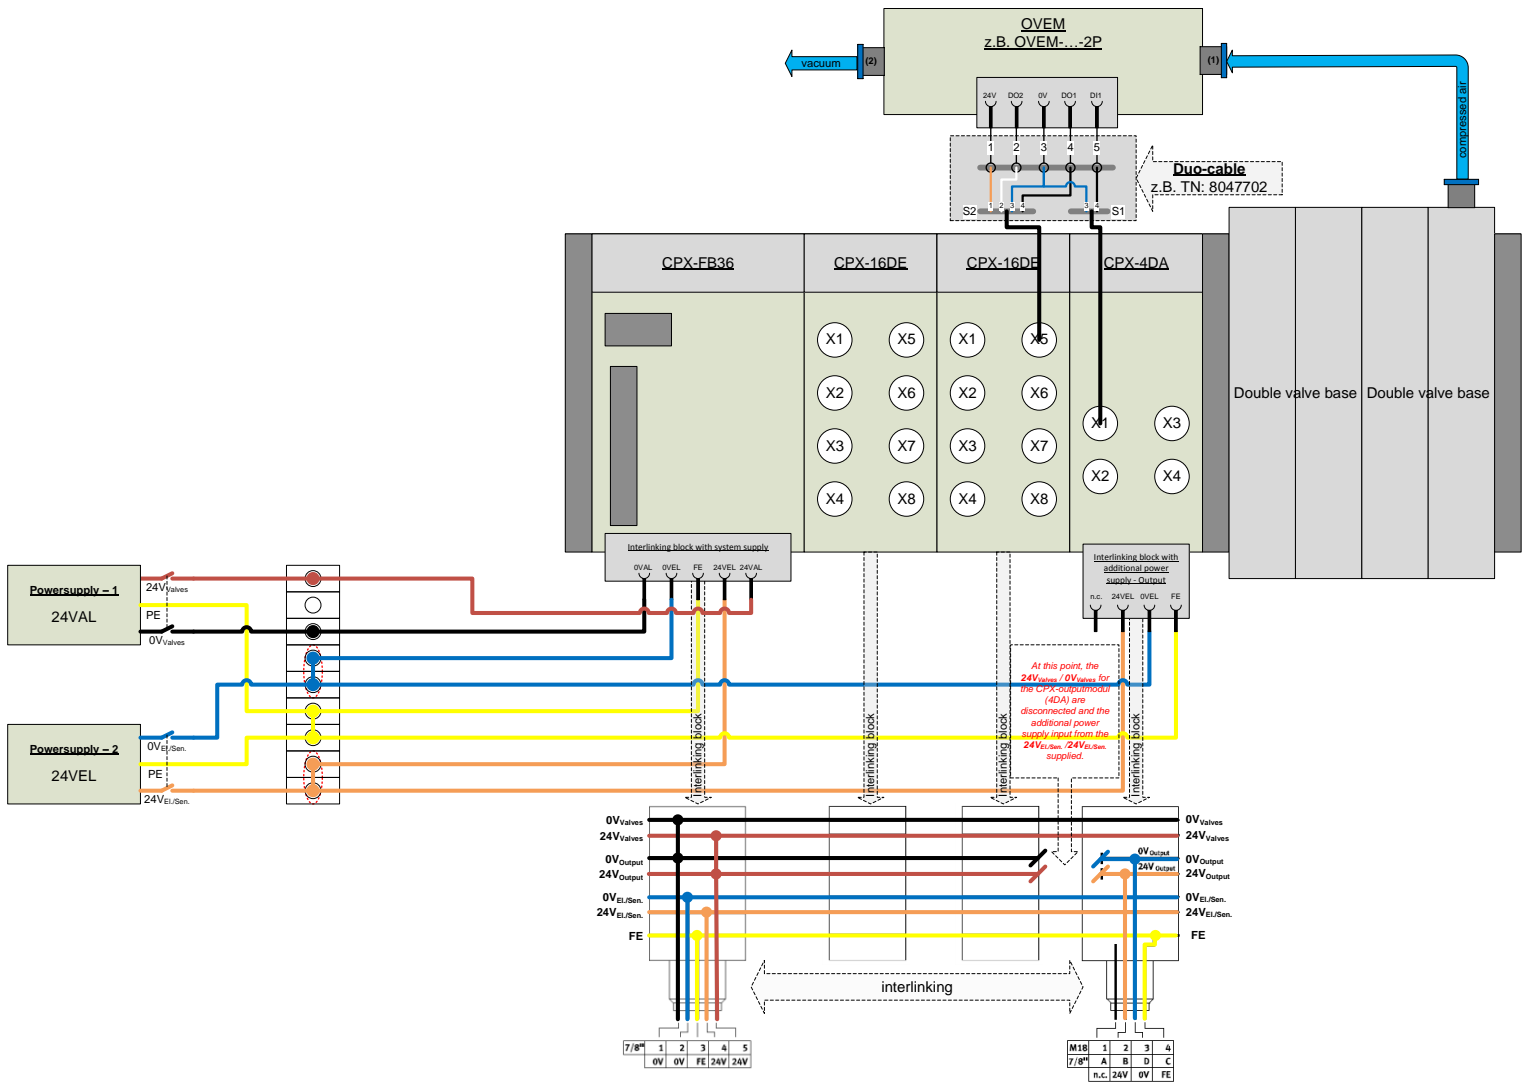

### Note

Due to the additional power supply, the power supply for the CPX-4DA module is isolated from the **24V<sub>Valves</sub>** power supply and must be connected to the **24V<sub>EL,Sen.</sub>** power supply when a combination OVEM<->CPX is used. This will ensure that the OVEM is at a "clean" **24V<sub>EL,Sen.</sub>** potential. In the case of an EMERGENCY STOP switch-off of the **24V<sub>Valves</sub>** supply (all-pole), the OVEM does **not** generate injector pulse.


### information



In this combination, the additional power supply for the CPX-4DA module, which is used to activate the OVEM, must be installed as the last component of the interlinking block.

## 6 An application to avoid

Using two power supply units with a common 0V and a single-pole switch-off

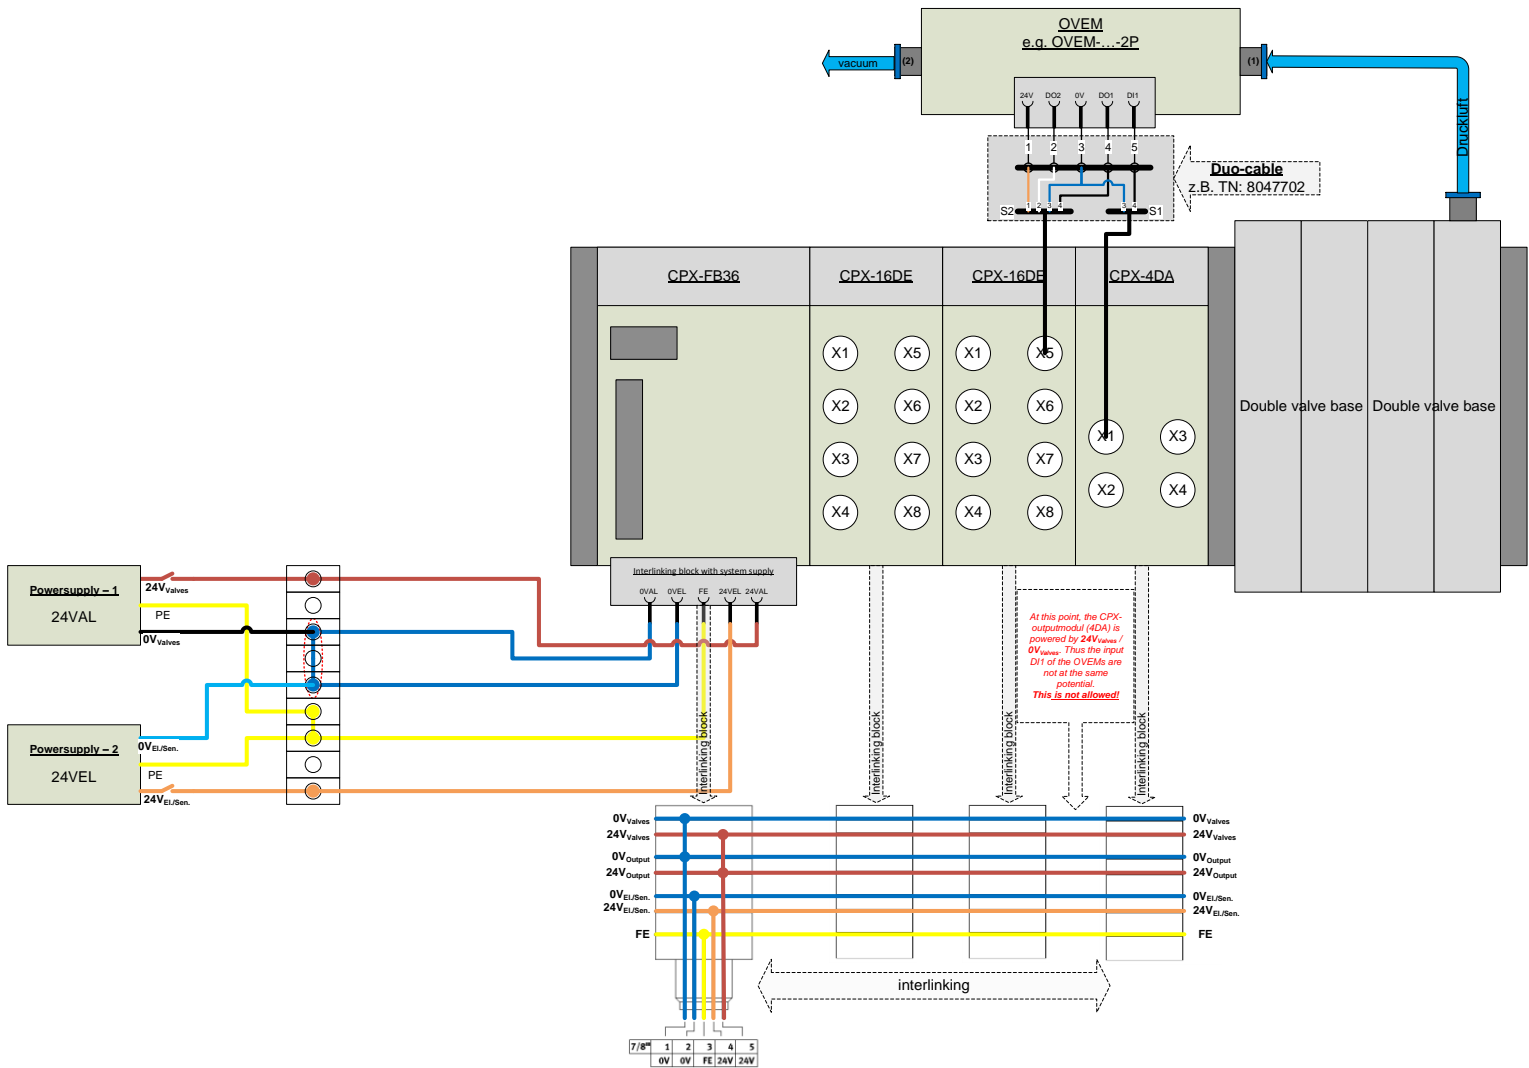

### Note

Due to the system power supply at FB36, the CPX-4DA module is fed from the **24VValves** power supply. As the valves and outputs on the interlinking block of bridge, the OVEM is **not** at the common electrical potential. If, on the occasion of an EMERGENCY STOP, the **24VValves** power supply is switched off, the OVEM will generate **one** ejector pulse as the result of the signal change.

This means that if an object is gripped at this time, it will be ejected on the occasion of an EMERGENCY STOP.