

# Clean design valve terminal CDVI with DeviceNet

**FESTO**



## Clean combination – direct interfacing of the valve terminal CDVI to the DeviceNet fieldbus system

The CDVI combines proven valve technology encapsulated in a highly resistant polymer material.

**NEW:** a built-in DeviceNet node for integration in DeviceNet-controlled systems, thus enabling the requirements of the foodstuffs industry to be met.

- Clean-design valves for the foodstuffs industry. Corrosion-resistant valves that are easy to clean.
- Installation-saving solution thanks to integrated DeviceNet fieldbus in a clean design.
- Possibility of expansion via CP connection. CP expansion with all CP valve terminals via the well-known CP range.
- The technical data: valve functions 5/2, 5/2 double solenoid, 5/3, 2 x 3/2 valves, modular in a basic pattern of 4 and 8 and expansion modules in blocks of 2.
- Extensive diagnostic concept: LEDs, module-oriented diagnostics, preventive maintenance (condition monitoring).



Easy to clean,

corrosion resistant

suitable for splash zones!

**204.1.PSI** →

Product Short Information

# Clean design valve terminal CDVI with DeviceNet

## Technical specifications

Designation	CDVI-DN
Protection class	IP65/IP67 (in preparation: IP69k up to 80 °C and 50 bar, NEMA 6)
Display elements	4 x LED for network status, load voltage of valves, power supply and CP system
Interface/ connection	“Bus IN/OUT” (M12 A-coded) for DeviceNet “24V DC” (M12 A-coded) for system and load supply “CP” (M9) for expansion with IO modules of the CP installation system
System capacity	Fixed groups of 4 or 8 valves, each capable of modular expansion by 2 x 2 valves positions, up to three pressure zones possible. Possibility of expansion via CP connection with modules of the CP installation system
Valve functions	5/2, 5/2 duoble solenoid, 5/3, 2 x 3/2 way valve
Standards	In conformity with the DeviceNet specification (ODVA V2.0, Errata 5.0)

## Diagnostic functions

Extensive diagnostic concept reduces maintenance and commissioning complexity thanks to: LED diagnosis for valves and fieldbus on-site, acquisition of all operating data via the fieldbus (voltage tolerance, short-circuits, CP module error, etc.), module-oriented diagnostics, integrated hours-run meter and switching cycle counter allow preventive diagnostics and maintenance (condition monitoring).




- PS Power system  
Operating voltage of electronics
- PL Power load: Load voltage of valves
- MNS Module/network status
- CP CP expansion modules
- 12/14 Status indication of valve functions




## CDVI with DeviceNet connections

Connections for fieldbus input/output, CP interface and 24 V DC are located on the rear – this is why they are suitable as a cleaning-friendly design.

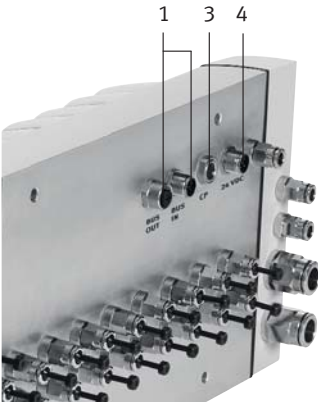

- 1 DeviceNet bus connection (T-tap or daisy chain)
- 3 CP extension connection
- 4 Power supply connection

## Control architecture

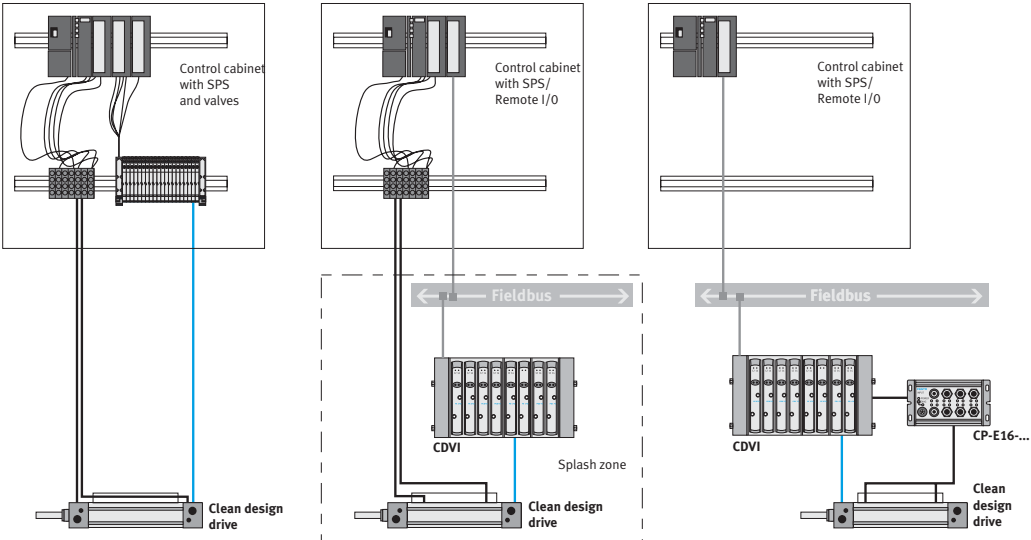

## Festo AG & Co. KG

Ruiter Strasse 82  
73734 Esslingen  
Internet [www.festo.com](http://www.festo.com)  
Tel. ++49 (0) 711 347-0  
Fax ++49 (0) 711 347-21 44  
E-mail [service\\_international@festo.com](mailto:service_international@festo.com)