

Guide axes EGC-FA, without drive


FESTO



Key features

- At a glance
- Driveless linear guide units with guide and freely movable slide
 - The guide axis is designed to support forces and torques in multi-axis applications
 - Increased torsional resistance
 - Reduced vibrations with dynamic loads
 - Drive axis and guide axis can be placed side by side or one above the other

System product for handling and assembly technology

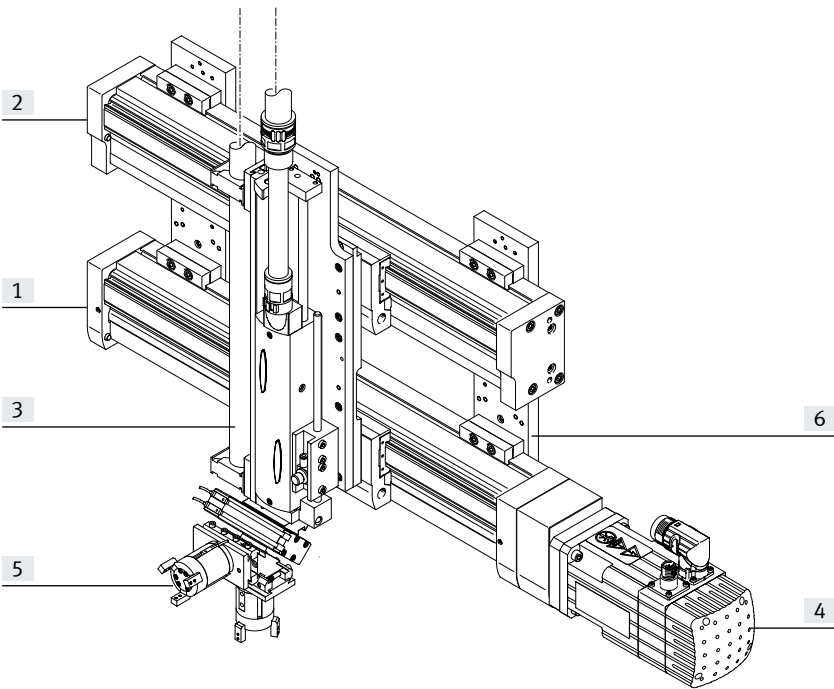

System components and accessories		
	Description	→ Page/Internet
[1] Axes	Wide range of combinations possible within handling and assembly systems	axis
[2] Guide axes	For absorbing forces and torques in multi-axis applications	guide axis
[3] Drives	Wide range of combinations possible within handling and assembly systems	drive
[4] Motors	Servo and stepper motors, with or without gear unit	motor
[5] Gripper	Wide range of variations possible within handling and assembly technology	gripper
[6] Adapter	For drive/drive and drive/gripper connections	adapter kit

Key features

Slide variants

Standard slide



Extended slide



Additional slide



Guide options

Protected version



- The protected guide cleans the guide rail and protects the recirculating ball bearing guide with the aid of an additional wiper

With central lubrication



- The lubrication adapters enable the guide to be permanently lubricated using semi- or fully automatic relubrication devices
- The adapters are suitable for oils and greases
- All lubrication connections must be connected

Clamping unit

→ Page8



- 1- or 2-channel design, for holding loads
- Reliable holding is guaranteed since the forces act directly on the slide
- A limited number of emergency braking operations are permissible with sizes 120 and 185

Guide axes and the corresponding axes/drives

Guide axis ELFA-RF



- Can be combined with:
 - Toothed belt axis ELGA-TB-RF
- For size 70 and 80
- Load capacity up to max. 800 N or 180 Nm

Guide axis DGC-FA




- Can be combined with:
 - Linear drive DGC-KF
- For size 8 ... 63
- Load capacity up to max. 15200 N or 1157 Nm

Guide axis EGC-FA



- Can be combined with:
 - Toothed belt axis EGC-TB
 - Ball screw axis EGC-BS
- For size 70 ... 185
- Load capacity up to max. 15200 N or 1157 Nm

Peripherals overview

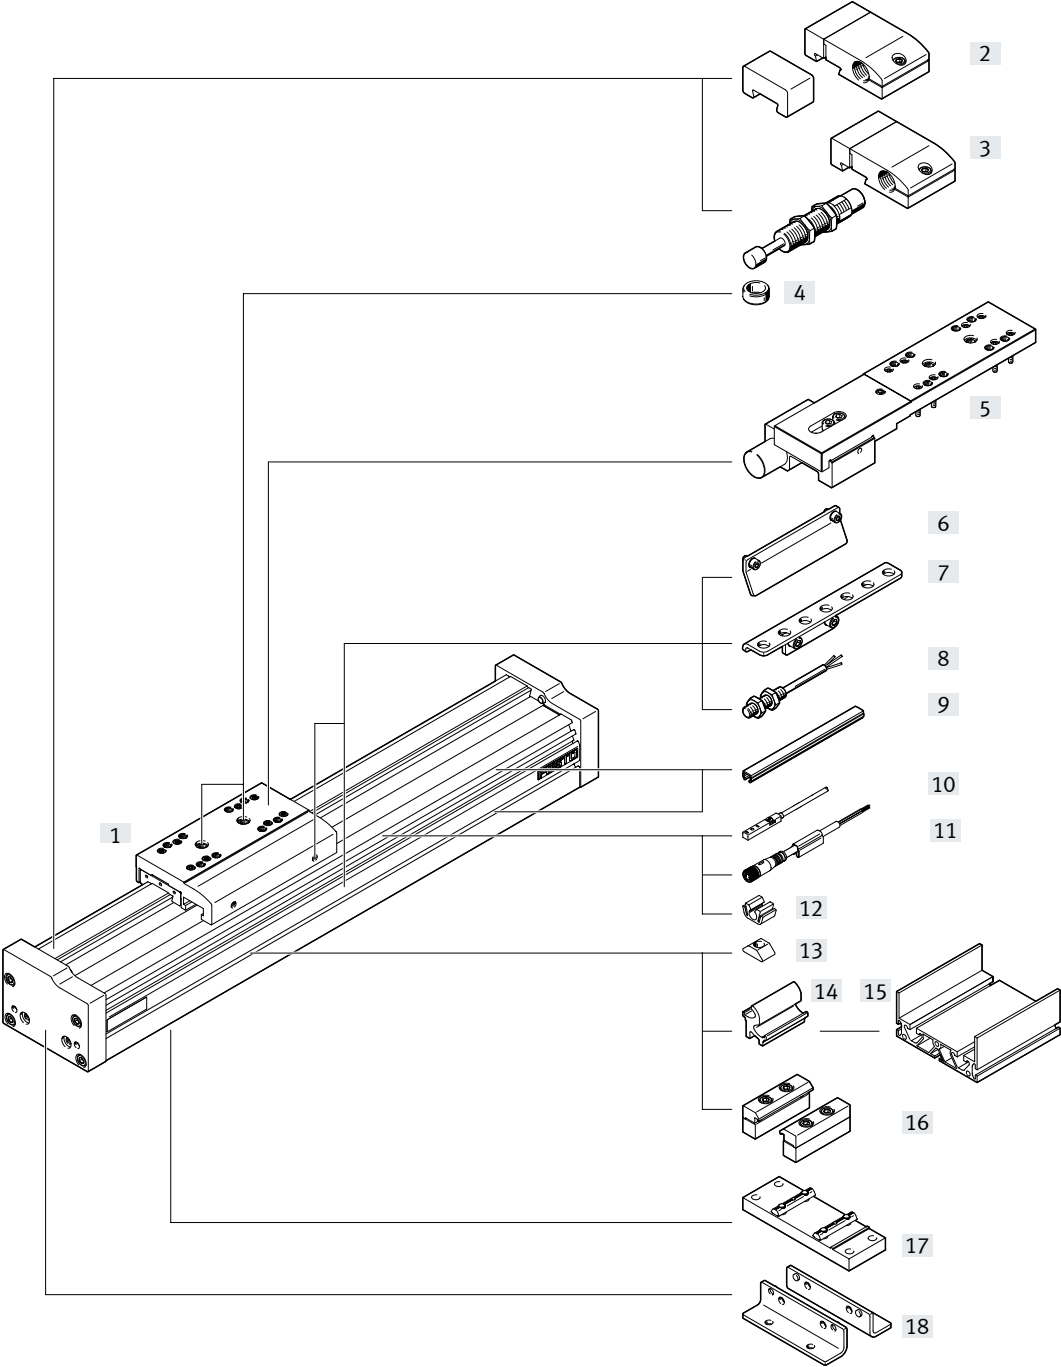

Peripherals overview

Variants and accessories			
Type	Description	→ Page/Internet	
[1] EGC-FA	Guide axis	6	
[2] Emergency buffer with retaining bracket NPE	For avoiding damage at the end stop in the event of malfunction	41	
[3] Shock absorber with retaining bracket KYE	For avoiding damage at the end stop in the event of malfunction	41	
[4] Centring pin/sleeve ZBS, ZBH	• For centring loads and attachments on the slide • Included in the scope of delivery: – With size 70: 2x ZBS-5 – With size 80, 120, 185: 2x ZBH-9	41	
[5] Clamping unit 1H....PN, 2H-PN	For holding loads	8	
[6] Switch lug SF-EGC	For sensing the slide position	39	
[7] Sensor bracket HWS-EGC	Adapter for mounting the inductive proximity switches (round design) on the axis	40	
[8] Proximity switch, M8 SIEN	Inductive proximity switch, round design	43	
[9] Slot cover ABP	For protection against contamination	41	
[10] Proximity switch, slot type 8 SIES	Inductive proximity switch, for slot type 8	42	
[11] Connecting cable NEBA	Via proximity switch	34	
[12] Clip SMBK	For mounting the proximity switch cable in the slot	41	
[13] Slot nut NST	For mounting attachments	41	
[14] Adapter kit DHAM	For mounting the support profile on the axis	42	
[15] Support profile HMIA	For mounting and guiding an energy chain	42	
[16] Profile mounting MUE	For mounting the axis on the side of the profile	37	
[17] Central support EAHF	For mounting the axis on the bottom of the profile	38	
[18] Foot mounting HPE	For mounting the axis on the end cap	36	

Type codes

001	Series	
EGC	Electric linear axis	
002	Size	
70	70	
80	80	
120	120	
185	185	
003	Stroke range [mm]	
...	50 ... 8500	
004	Guide	
FA	Guide axis	
005	Stroke reserve	
OH	None	
...H	0 ... 999 mm	
006	Slide	
GK	Standard slide	
GP	Standard slide, protected	
GV	Extended slide	
GQ	Extended slide, protected	
007	Additional slide left	
KL	Additional slide, standard, left	
008	Additional slide, right	
KR	Additional slide standard, right	
009	Lubrication function	
	None	
C	Lubrication adapter	
010	Clamping unit	
	None	
1HL	Holding function, 1-channel, left	
1HR	Single-channel holding function, right	
2H	Holding function, 2-channel	
011	Actuation type	
	None	
PN	Pneumatically actuated	
012	Accessories	
	None	
ZUB-	Accessories supplied loose	
013	Foot mounting	
	None	
F	1 record	
014	Profile mounting	
	None	
...M	1 - 50 pieces	

015	Mounting slot covering	
	None	
...B	1 ... 50 pieces	
016	Slot cover, sensor slot	
	Without	
...S	1 - 50 pieces	
017	Slot nut, mounting slot	
	Without	
...Y	1 ... 99 pieces	
018	Proximity switch, inductive, slot 8, PNP, N/O contact, cable 7.5 m	
	None	
...X	1 ... 6 pieces	
019	Proximity switch, inductive, slot 8, N/C contact, cable 7.5 m	
	None	
...Z	1 ... 6 pieces	
020	Emergency buffer with retaining bracket	
	Without	
...A	1 ... 2 pieces	
021	Shock absorber with retaining bracket	
	None	
...C	1 ... 2 pieces	
022	Proximity switch, inductive, M8, PNP, N/O contact, cable 2.5 m	
	Without	
...O	1 ... 99 pieces	
023	Proximity switch, inductive, M8, PNP, N/C contact, cable 2.5 m	
	None	
...P	1 ... 99 pieces	
024	Proximity switch, inductive, M8, PNP, N/C contact, M8 plug	
	None	
...R	1 ... 99 pieces	
025	Proximity switch, inductive, M8, PNP, N/O contact, M8 plug	
	Without	
...W	1 ... 99 pieces	
026	Connecting cable 2.5 m, M8, 3-wire	
	None	
...V	1 ... 99 pieces	
027	Cable clip	
	None	
10CL	10 pieces	
20CL	20 pieces	
30CL	30 pieces	
40CL	40 pieces	
50CL	50 pieces	
60CL	60 pieces	
70CL	70 pieces	
80CL	80 pieces	
90CL	90 pieces	
100CL	100 units	

Datasheet



-  - Size
70 ... 185
-  - Stroke length
50 ... 8500 mm
-  - www.festo.com
-  - Repair service

**General technical data**

Size	70	80	120	185
Design	Guide			
Guide	Recirculating ball bearing guide			
Mounting position	Any			
Working stroke				
EGC-...-GK/-GP	[mm]	50 ... 5000	50 ... 8500	50 ... 8500
Max. speed	[m/s]	5		
Max. acceleration	[m/s ²]	50		

Operating and environmental conditions

Ambient temperature	[°C]	-10 ... +60
Degree of protection		IP40

Weight [kg]


Size	70	80	120	185
Basic weight with 0 mm stroke ¹⁾				
EGC-...-GK/-GP	1.20	2.00	7.30	20.80
Additional weight per 10 mm stroke	0.042	0.062	0.150	0.290
Moving mass				
EGC-...-GK/-GP	0.30	0.55	2.00	6.00
Additional slide				
EGC-...-KL/-KR	0.30	0.55	2.00	6.00
Clamping unit				
EGC-...-1H...-PN	–	0.70	2.30	4.90
EGC-...-2H-PN	–	1.30	4.00	8.30

1) Including slide

Datasheet

Materials

Sectional view

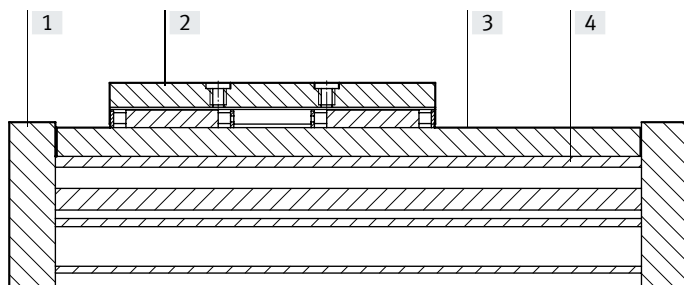

Axis

[1] End cap	Anodised wrought aluminium alloy
[2] Slide	Anodised wrought aluminium alloy
[3] Guide rail	High-alloy steel
[4] Profile	Anodised wrought aluminium alloy
Note on materials	RoHS-compliant
	Contains paint-wetting impairment substances

Technical data – Clamping unit

Dimensions → Page 29

Size	80	120	185
Pneumatic connection	M5	M5	M5
Clamping type	Clamping via spring force, release via compressed air		
Static holding force			
EGC-...-1H-...-PN [N]	320	1200	1500
EGC-...-2H-...-PN [N]	640	2400	3000
Max. number of emergency braking operations1) at reference energy [J]	–	750 35	750 70
Number of clamping operations under rated load [millions of switching cycles]	0.45	0.05	> 1.4

1) Emergency braking refers to braking the payload if the drive axis loses power.

Operating and environmental conditions – Clamping unit


Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]
Operating pressure	
Clamping unit open [bar]	4.5 ... 8
Clamping unit closed [bar]	Unpressurised
Ambient temperature [°C]	–10 ... +60

Datasheet

Characteristic load values

The indicated forces and torques refer to the slide surface. The point of application of force is the point where the centre of the guide and the longitudinal centre of the slide intersect.

These values must not be exceeded during dynamic operation. Special attention must be paid to the deceleration phase.

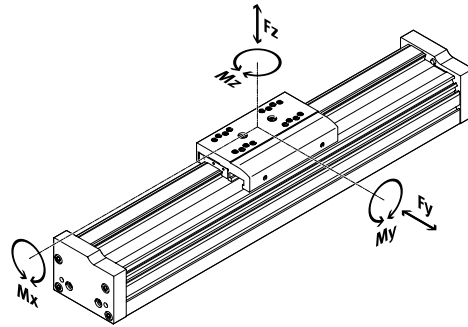

If the axis is subjected to two or more of the indicated forces and torques simultaneously, the following equation must be satisfied in addition to the indicated maximum loads:

Calculating the load comparison factor:

$$f_v = \frac{|F_{y1}|}{F_{y2}} + \frac{|F_{z1}|}{F_{z2}} + \frac{|M_{x1}|}{M_{x2}} + \frac{|M_{y1}|}{M_{y2}} + \frac{|M_{z1}|}{M_{z2}} \leq 1$$

Permissible forces and torques			Size	70	80	120	185
$F_{y_{max}}$	[N]			1850	3050	6890	15200
$F_{z_{max}}$	[N]			1850	3050	6890	15200
$M_{x_{max}}$	[Nm]			16	36	144	529
$M_{y_{max}}$	GK/GP [Nm]			51	97	380	1157
$M_{z_{max}}$	GK/GP [Nm]			51	97	380	1157

Service life


The service life of the guide depends on the load. To provide a rough indication of the service life of the guide, the graph below plots the load comparison factor f_v against the service life.

These values are only theoretical. You must consult your local contact person at Festo for load comparison factors f_v greater than 1.5.

Load comparison factor f_v as a function of service life

Example:

A user wants to move an X kg load. Using the above formula gives a value of 1.5 for the load comparison factor. According to the graph, the guide would have a service life of approx. 1500 km. Reducing the acceleration reduces the M_z and M_y values. A load comparison factor of 1 now gives a service life of 5000 km.

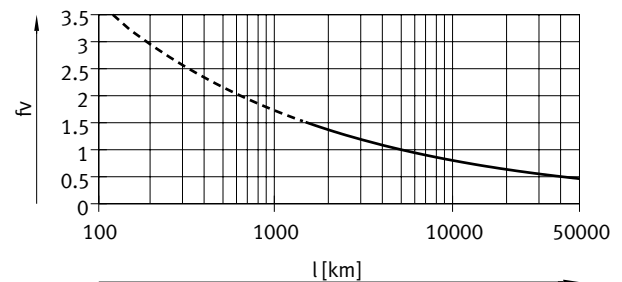

Note

Engineering software
Electric Motion Sizing
www.festo.com/x/electric-motion-sizing

The engineering software can be used to calculate the guide workload for a service life of 5000 km.

$f_v > 1.5$ are only theoretical comparison values for the recirculating ball bearing guide.

Datasheet

Stroke reserve

Stroke length Stroke reserve

The selected stroke corresponds in principle to the required working stroke. The variant GK does not have a wiper ring on the guide. This variant therefore also has a safety distance between the drive cover and slide that is not considered to be part of the working stroke.

It is possible to define a safety distance (similar to that for GK) between the drive cover and slide for the variants GP and GK-C using the "stroke reserve" characteristic in the modular product system. For the variant GK, the stroke reserve and safety distance are added for each end position.

- The stroke reserve length can be freely selected
- The sum of the stroke length and 2x stroke reserve must not exceed the maximum working stroke

Example:

EGC-70-500-FA-20H-...

Working stroke = 500 mm

2x stroke reserve = 40 mm

Total length = 540 mm

(540 mm = 500 mm + 2x 20 mm)

Size	70	80	120	185
L9 = safety distance for GK [mm] (per end position)	10.5	13	18	21

Working stroke reduction


With standard slide GK/GP / extended slide GV/GQ with additional slide KL/KR

- In the case of a guide axis with additional slide, the working stroke is reduced by the length of the additional slide and the distance between the two slides
- If the variant GP/GQ is ordered, the additional slide is also protected
- If the variant GV/GQ is ordered, the additional slide is not extended
- If the variant GK-C is ordered, the additional slide is also supplied with lubrication adapters

L17 = slide length

L = distance between the two slides

[1] = additional slide



Example:

Type EGC-70-500-FA-...-GK-KL/KR

Working stroke without

additional slide = 500 mm

L = 20 mm

L17 = 100 mm

Working stroke with

additional slide = 380 mm

(500 mm – 20 mm – 100 mm)

Dimensions – Additional slide

Size	70		80		120		185	
Variant	GK/GV	GP/GQ or GK-C/GV-C	GK/GV	GP/GQ or GK-C/GV-C	GK/GV	GP/GQ or GK-C/GV-C	GK/GV	GK-C/GV-C
Length L17 [mm]	100	125	120	146	200	236	280	308

Datasheet

Working stroke reduction per side

With integrated emergency buffer NPE/shock absorber YSRW with shock absorber retainer KYE

- The working stroke is reduced by the total dimension of the emergency buffer/shock absorber and shock absorber retainer.
- The rubber buffer in the cap must be removed.
- Shock absorbers must not be used in combination with GK-C.

Size		70	80	120	185
With emergency buffer	[mm]	43	68	98	133
With shock absorber	[mm]	42	63	84	107


Working stroke reduction

With integrated clamping unit

- The working stroke is reduced by the length of the clamping unit.
- With 1-channel clamping units, the stroke is reduced on one side with respect to the mounting surface
- With 2-channel clamping units, the stroke is reduced symmetrically with respect to the mounting surface of the load
- Shock absorbers must not be used in combination with the clamping unit.

Size		80	120	185
EGC-...-1H...-PN	[mm]	87	124	131
EGC-...-2H...-PN	[mm]	174	248	262

2nd moment of area




Size		70	80	120	185
I _y	[mm ⁴]	3.95x10 ⁵	8.44x10 ⁵	4.62x10 ⁶	2.34x10 ⁷
I _z	[mm ⁴]	5.77x10 ⁵	1.16x10 ⁶	5.65x10 ⁶	2.74x10 ⁷

Datasheet


Maximum permissible support spacing L (without profile mounting MUE/central support EAHF) as a function of force F

The axis may need to be supported in order to limit deflection in the case of long strokes.

The following graphs can be used to determine the maximum permissible support spacing l as a function of force F acting on the axis. The deflection is $f = 0.5\text{ mm}$.

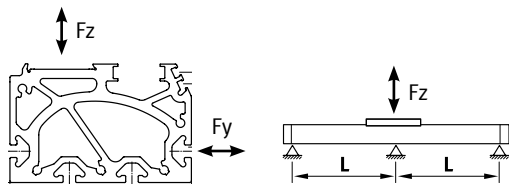


Force F_y

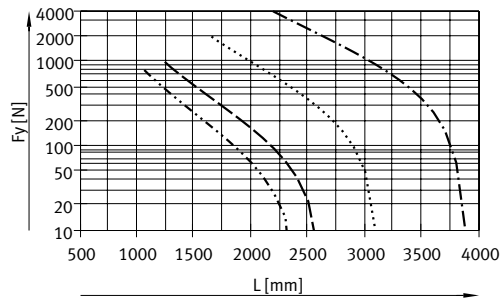

- EGC-70
- EGC-80
- EGC-120
- . - . - EGC-185

Force F_z

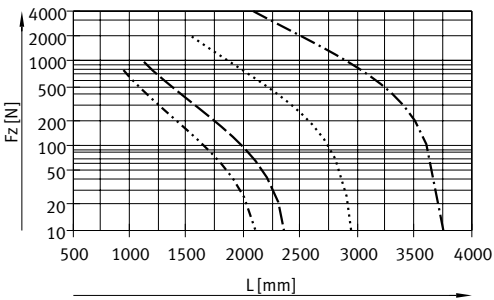


Recommended deflection limits

Adherence to the following deflection limits is recommended so as not to impair the functionality of the axes. Greater deformation can result in increased friction, greater wear and reduced service life.

Size	Dynamic deflection (load moves)	Static deflection (stationary load)
70 ... 185	0.05% of the axis length, max. 0.5 mm	0.1% of the axis length

Datasheet

Dimensions

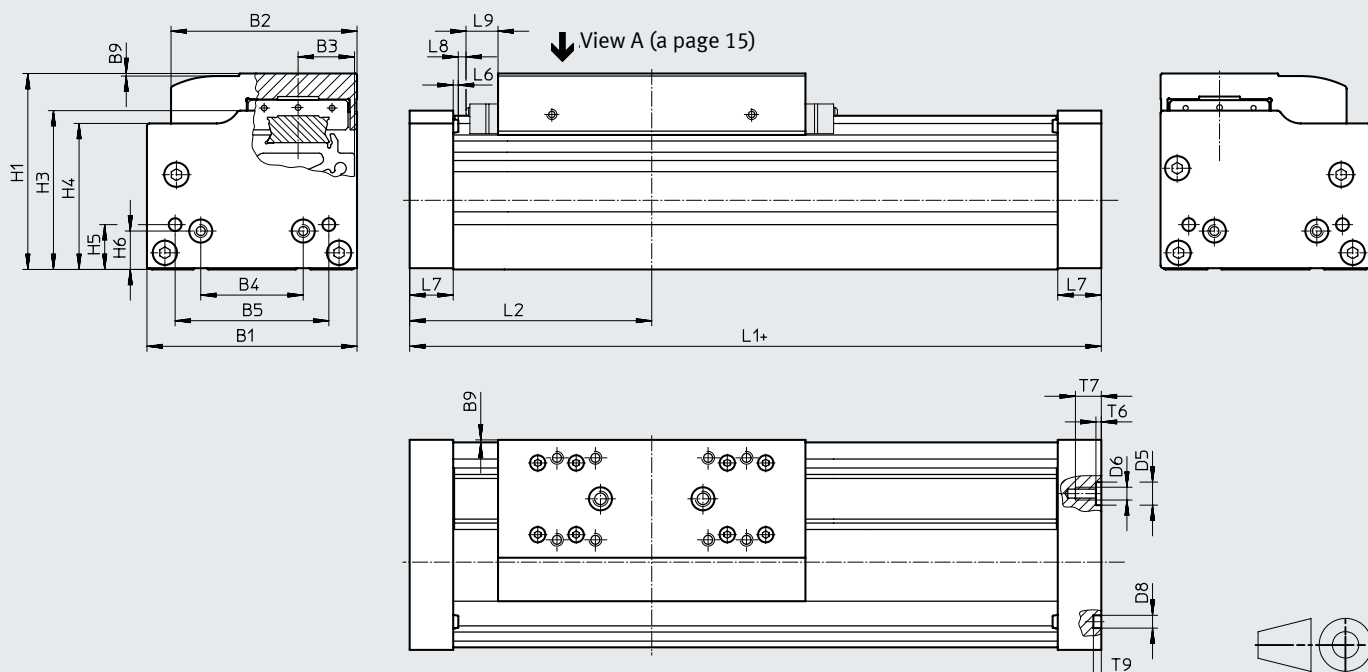Download CAD data → www.festo.com

+ = plus stroke length + 2x stroke reserve
 L9 = for GK: safety distance per end position;
 for GP: dimension for wiper seal d page 10;
 for GK-C/GV-C: dimension for adapter d page 23

Size	B1	B2	B3	B4	B5	B9	D5 ø H7
70	69	58.6	16.5	30	45	1	–
80	82	72.6	22	40	60	1	9
120	120	107	33	80	40	1	–
185	186	169	53	120	80	1	–


Size	D6	D8 ø H7	H1	H3	H4	H5	H6	L1
70	M5	5	64	50.5	47	13	13	163
80	M5	5	76.5	62	57	17.5	15	190
120	M8	9	111.5	89	82	22	22	306
185	M10	9	172.5	141	131.5	25	25	406

Size	L2	L6	L7	L8	L9	T6	T7	T9
70	81.5	1.8	16	3	10.5	–	10	3.1
80	95	2	17	3	13	2.1	10.1	3.1
120	153	2	30	3	18	–	16	2.1
185	203	2	37	3	21	–	20	2.1


Datasheet

Profile


Size: 70




Size 80



Size 120

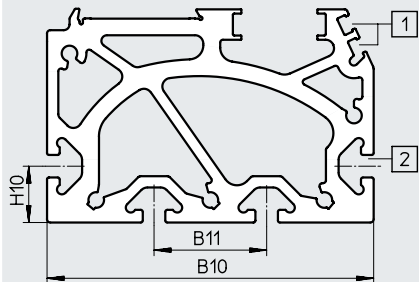

Size 185

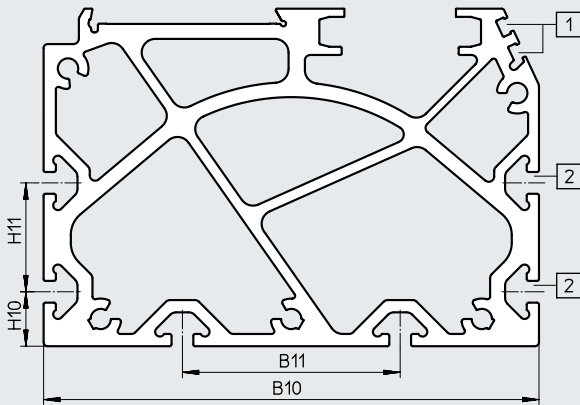

[1] Sensor slot for proximity switch

[2] Mounting slot for slot nut

Size	B10	B11	H10	H11
70	67	40	20	–
80	80	40	20	–
120	116	40	20	–
185	182	80	20	40

 **Note**

Requirements for the flatness of the bearing surface and of attachments as well as for use in parallel structures

a www.festo.com/sp User documentation


Datasheet

Dimensions


[Download CAD data → www.festo.com](http://www.festo.com)

GK – Standard slide / GP – Standard slide, protected

Size: 70

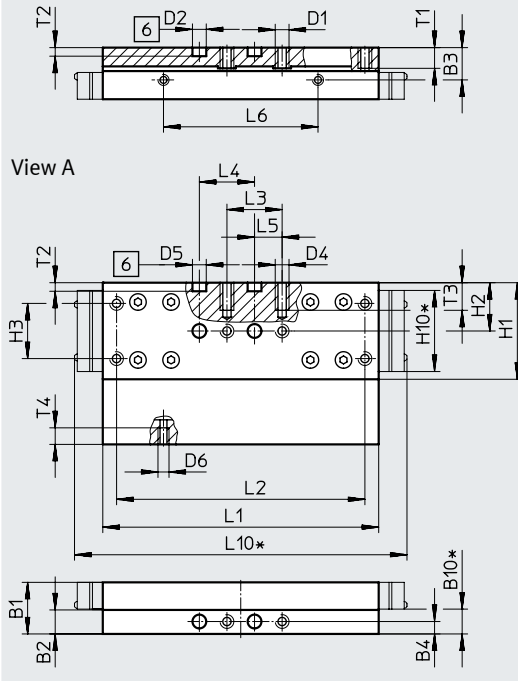

Size 80

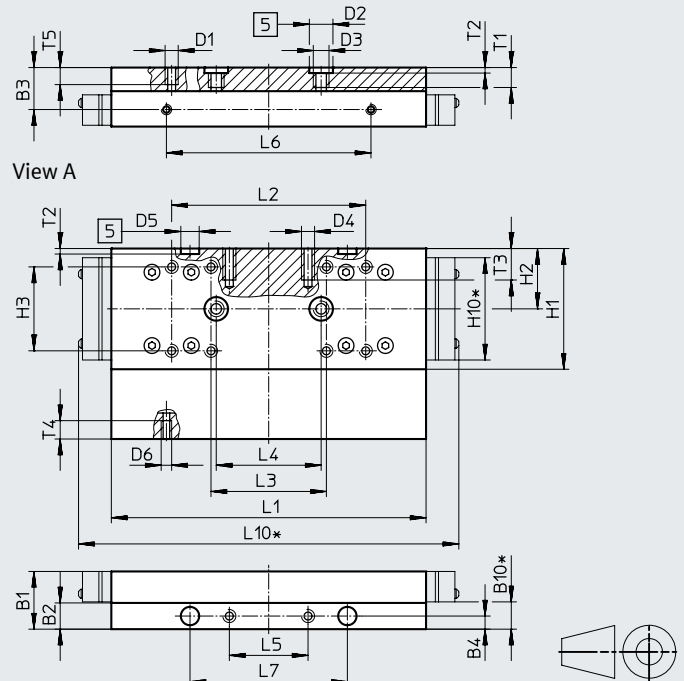

[5] Drilled hole for centring sleeve

[6] Drilled hole for centring pin

* Protected version

Size	B1	B2	B3	B4	B10*	D1	D2 ø H7	D3	D4	D5 ø H7	D6	H1	H2	H3
70	18.7	8.7	11.7	4.5	9	M5	5	–	M5	5	M4	35	17.5	20 ±0.1
80	22	10	16	5	10.4	M5	9	M6	M5	7	M4	46	23	32 ±0.2

Size	H10*	L1	L2	L3	L4	L5	L6	L7	L10*	T1	T2	T3	T4	T5
		±0.1			±0.03		±0.1	±0.05			+0.1			
70	29.4	100	90 ±0.1	20 ±0.1	20	10 ±0.1	56	–	121	7.5	3.1	10	6	–
80	39	120	74 ±0.2	44 ±0.2	40	30 ±0.1	78	60	145	8.6	2.1	12	7	7.5

* Protected version


Datasheet

Dimensions

Download CAD data → www.festo.com

GK – Standard slide / GP – Standard slide, protected


Size: 120

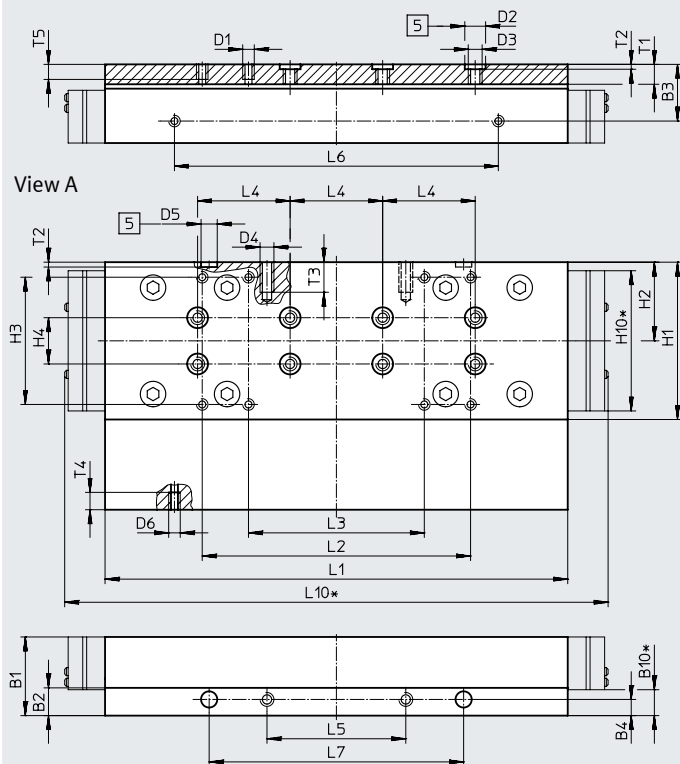

[5] Drilled hole for centring sleeve

[6] Drilled hole for centring pin

* Protected version



Size	B1	B2	B3	B4	B10*	D1	D2 Ø H7	D3	D4	D5 Ø H7	D6	H1	H2	H3	H4 ±0.03
120	34	12	24.5	7	11.2	M5	9	M6	M6	7	M5	68	34	55 ±0.2	20

Size	H10*	L1 ±0.1	L2	L3	L4 ±0.03	L5	L6 ±0.1	L7 ±0.05	L10*	T1	T2 +0.1	T3	T4	T5
120	60.6	203.3	116 ±0.2	76 ±0.2	40	60 ±0.1	140	110	235	8.6	2.1	13	7.5	7.5

* Protected version


Datasheet

Dimensions


[Download CAD data → www.festo.com](http://www.festo.com)

GK – Standard slide


Size: 185

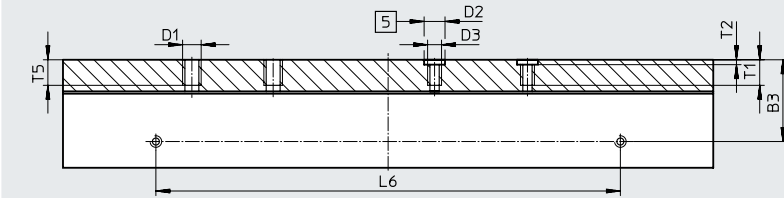

View A

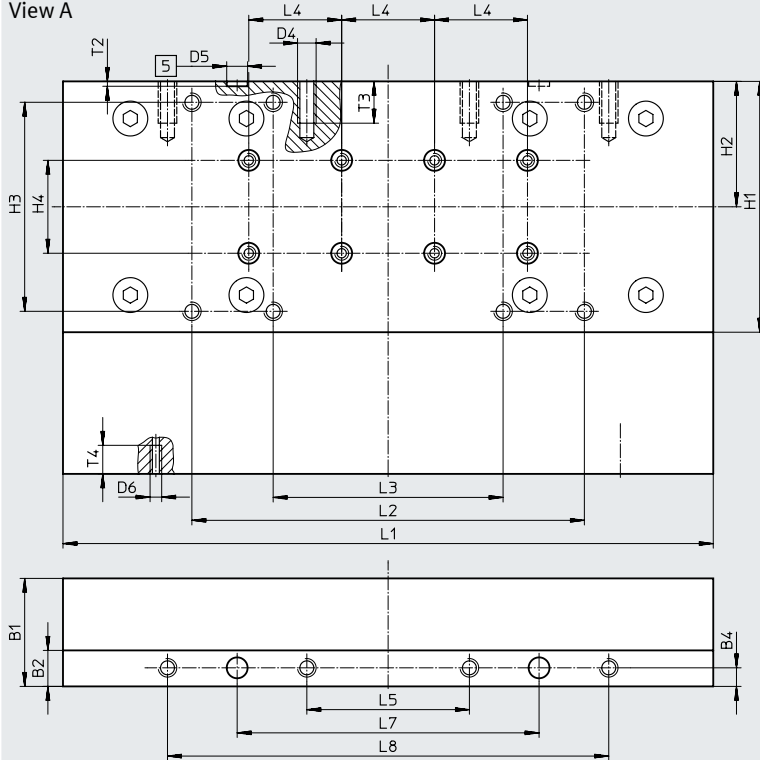

[5] Drilled hole for centring sleeve



Size	B1	B2	B3	B4	D1	D2 Ø H7	D3	D4	D5 Ø H7	D6	H1	H2	H3	H4 ±0.03
185	46.5	15.5	35.2	8	M8	9	M6	M8	9	M5	108	54	90 ±0.2	40

Size	L1	L2	L3	L4	L5	L6	L7	L8	T1	T2	T3	T4	T5
	±0.1			±0.03		±0.1	±0.05	±0.2		+0.1			
185	282.8	169 ±0.2	99 ±0.2	40	70 ±0.2	200	130	190	11	2.1	18	12.3	12


Datasheet

Dimensions

Download CAD data → www.festo.com

GV – Extended slide / GQ – Extended slide, protected

Size: 70

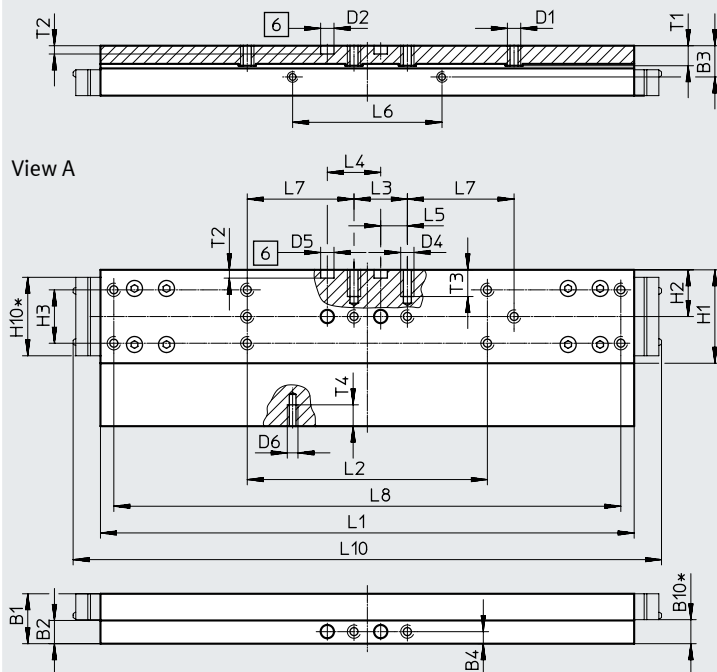

[6] Drilled hole for centring sleeve
* Protected version

Size	B1	B2	B3	B4	B10*	D1	D2 Ø H7	D4	D5 Ø H7
70	18.7	8.7	11.7	4.5	9	M5	5	M5	5
Size	D6	H1	H2	H3	H10*	L1	L2	L3	L4
70	M4	35	17.5	±0.1 20	29.4	±0.1 200	±0.1 90	±0.1 20	±0.03 20
Size	L5	L6	L7	L8	L10*	T1	T2	T3	T4
70	±0.1 10	±0.1 56	±0.1 40	±0.2 190	221	7.5	+0.1 3.1	10	6

* Protected version


Datasheet

Dimensions

[Download CAD data → www.festo.com](http://www.festo.com)

GV – Extended slide / GQ – Extended slide, protected

Size 80

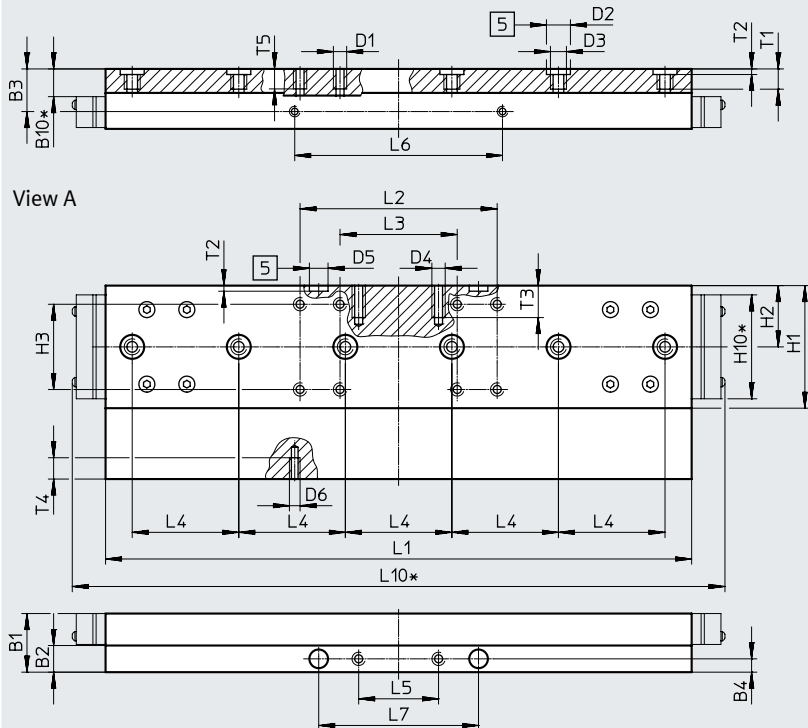

[5] Drilled hole for centring sleeve
* Protected version

Size	B1	B2	B3	B4	B10*	D1	D2 Ø H7	D3	D4	D5 Ø H7
80	22	10	16	5	10.4	M5	9	M6	M5	7

Size	D6	H1	H2	H3	H10*	L1	L2	L3	L4
				±0.2		±0.1	±0.2	±0.2	±0.03
80	M4	46	23	32	39	220	74	44	40

Size	L5	L6	L7	L10*	T1	T2	T3	T4	T5
	±0.1	±0.1	±0.05			+0.1			
80	30	78	60	245	8.6	2.1	12	7	7.5

* Protected version


Datasheet

Dimensions

Download CAD data → www.festo.com

GV – Extended slide / GQ – Extended slide, protected

Size: 120

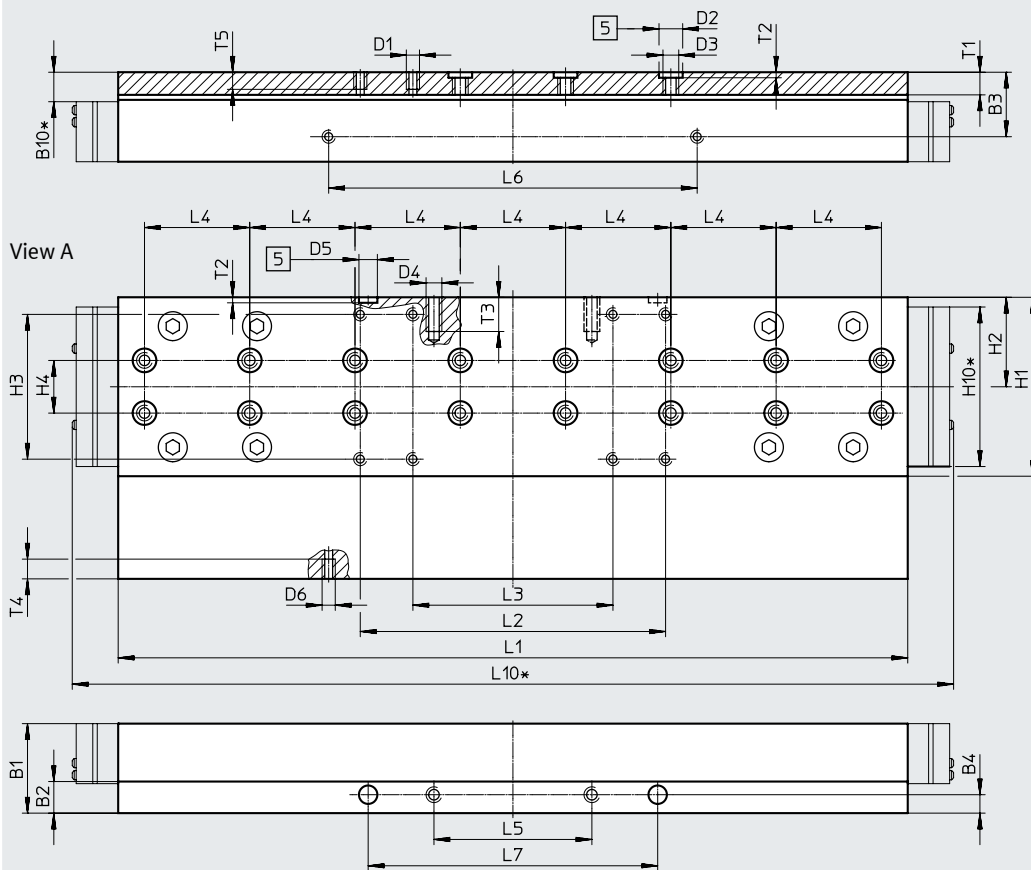

[5] Drilled hole for centring sleeve

* Protected version

Size	B1	B2	B3	B4	B10*	D1	D2 Ø H7	D3	D4	D5 Ø H7
120	34	12	24.5	7	11.2	M5	9	M6	M6	7
Size	D6	H1	H2	H3	H4	H10*	L1	L2	L3	L4
					±0.03		±0.1			±0.03
120	M5	68	34	55 ±0.2	20	60.6	303.3	116 ±0.2	76 ±0.2	40
Size	L5	L6	L7	L8	L10*	T1	T2	T3	T4	T5
	±0.1	±0.1		±0.2			±0.1			
120	60	140	110±0.05	–	335	8.6	2.1	13	7.5	7.5

* Protected version


Datasheet

Dimensions

[Download CAD data → www.festo.com](http://www.festo.com)

GV – Extended slide

Size: 185

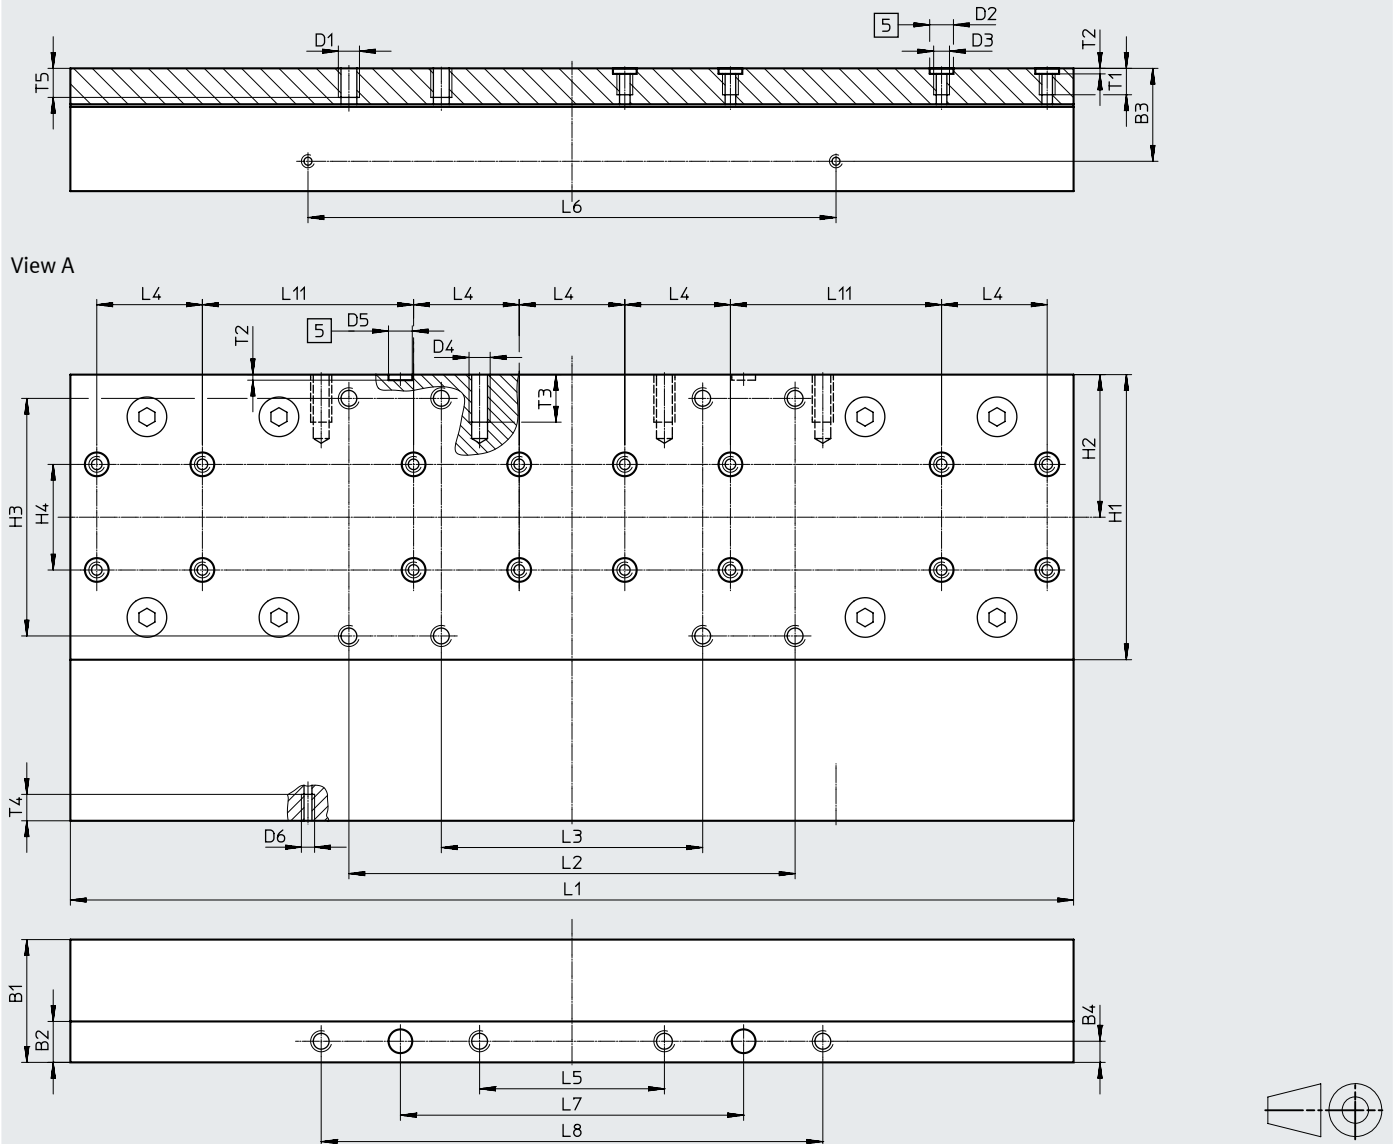

[5] Drilled hole for centring sleeve

Size	B1	B2	B3	B4	D1	D2 ø H7	D3	D4	D5 ø H7
185	46.5	15.5	35.2	8	M8	9	M6	M8	9

Size	D6	H1	H2	H3	H4	L1	L2	L3	L4
				±0.2	±0.03	±0.1	±0.2	±0.2	±0.03
185	M5	108	54	90	40	382.8	169	99	40

Size	L5	L6	L7	L8	L11	T1	T2	T3	T4	T5
	±0.2	±0.1	±0.05	±0.2	±0.03		±0.1			
185	70	200	130	190	80	11	2.1	18	10	12


Datasheet

Dimensions




Download CAD data → www.festo.com

GK-C – Standard slide with lubrication adapter

Size 70

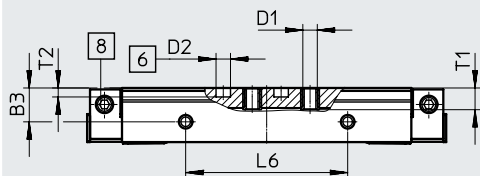

View A

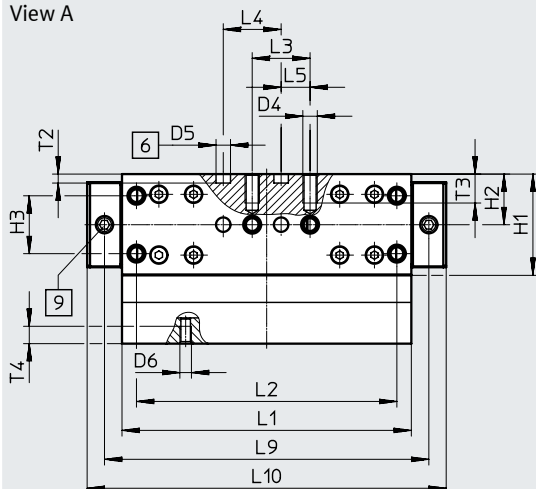

- [6] Drilled hole for centring pin
 [8] Lubricating hole for lubrication adapter
 M6 threaded connection, 6 mm deep
 [9] Lubricating hole for lubrication adapter
 M6 threaded connection, 5.5 mm deep

Size	B1	B2	B3	B4	B5	B6	D1	D2 Ø H7	D4
70	18.7	8.7	11.7	4.5	0.5	5.7	M5	5	M5
Size	D5 Ø H7	D6	H1	H2	H3	L1	L2	L3	L4
70	5	M4	35	17.5	20	100	90	20	20
Size	L5	L6	L9	L10	L11	T1	T2	T3	T4
70	10	56 ±0.1	112.1	124.1	30	7.5	3.1 +0.1	10	6


Datasheet

Dimensions



[Download CAD data → www.festo.com](http://www.festo.com)

GK-C – Standard slide with lubrication adapter





Size 80

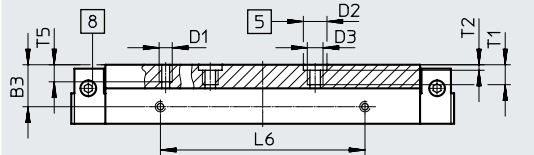

View A

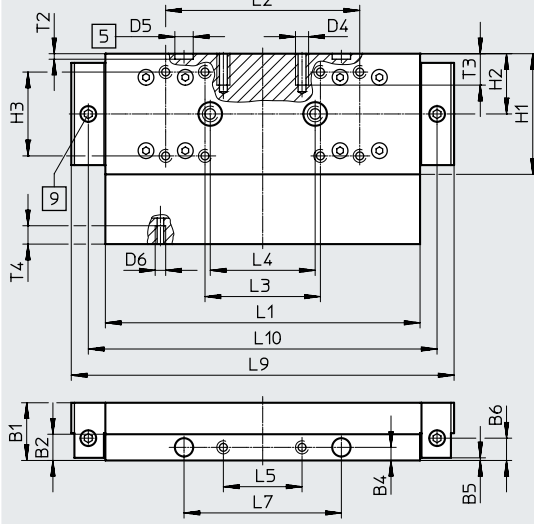

Size: 120

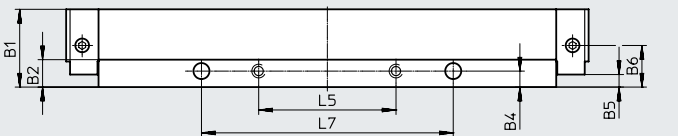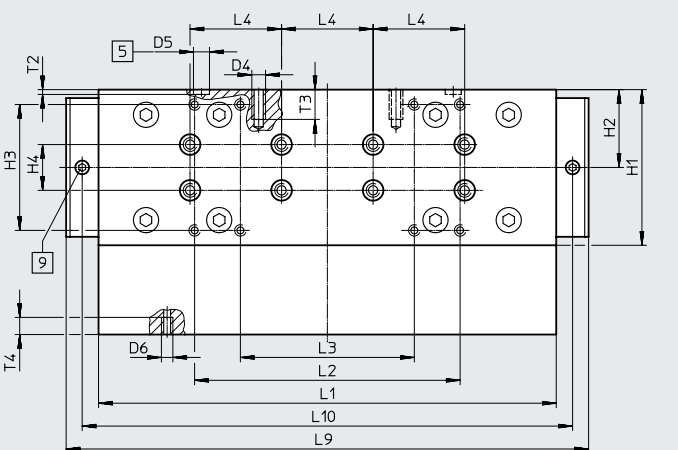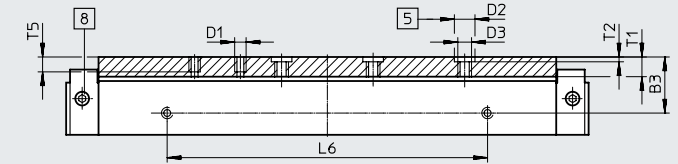

- [5] Drilled hole for centring sleeve
- [6] Drilled hole for centring pin
- [8] Lubricating hole for lubrication adapter
M6 threaded connection, 6 mm deep
- [9] Lubricating hole for lubrication adapter
M6 threaded connection, 5.5 mm deep

Size	B1	B2	B3	B4	B5	B6	D1	D2 Ø H7	D3	D4
80	22	10	16	5	1 ±0.1	8.5	M5	9	M6	M5
120	34	12	24.5	7	5.5	13.9	M5	9	M6	M6

Size	D5 Ø H7	D6	H1	H2	H3	H4	L1	L2	L3	L4
					±0.2	±0.03	±0.1	±0.2	±0.2	±0.03
80	7	M4	46	23	32	–	120	74	44	40
120	7	M5	68	34	55	20	203.3	116	76	40

Size	L5	L6	L7	L9	L10	T1	T2	T3	T4	T5
	±0.1	±0.1	±0.05				±0.1			
80	30	78	60	146	133	8.6	2.1	12	7	7.5
120	60	140	110	228.3	214.3	8.6	2.1	13	7.5	7.5


Datasheet

Dimensions

Download CAD data → www.festo.com

GK-C – Standard slide with lubrication adapter

Size: 185

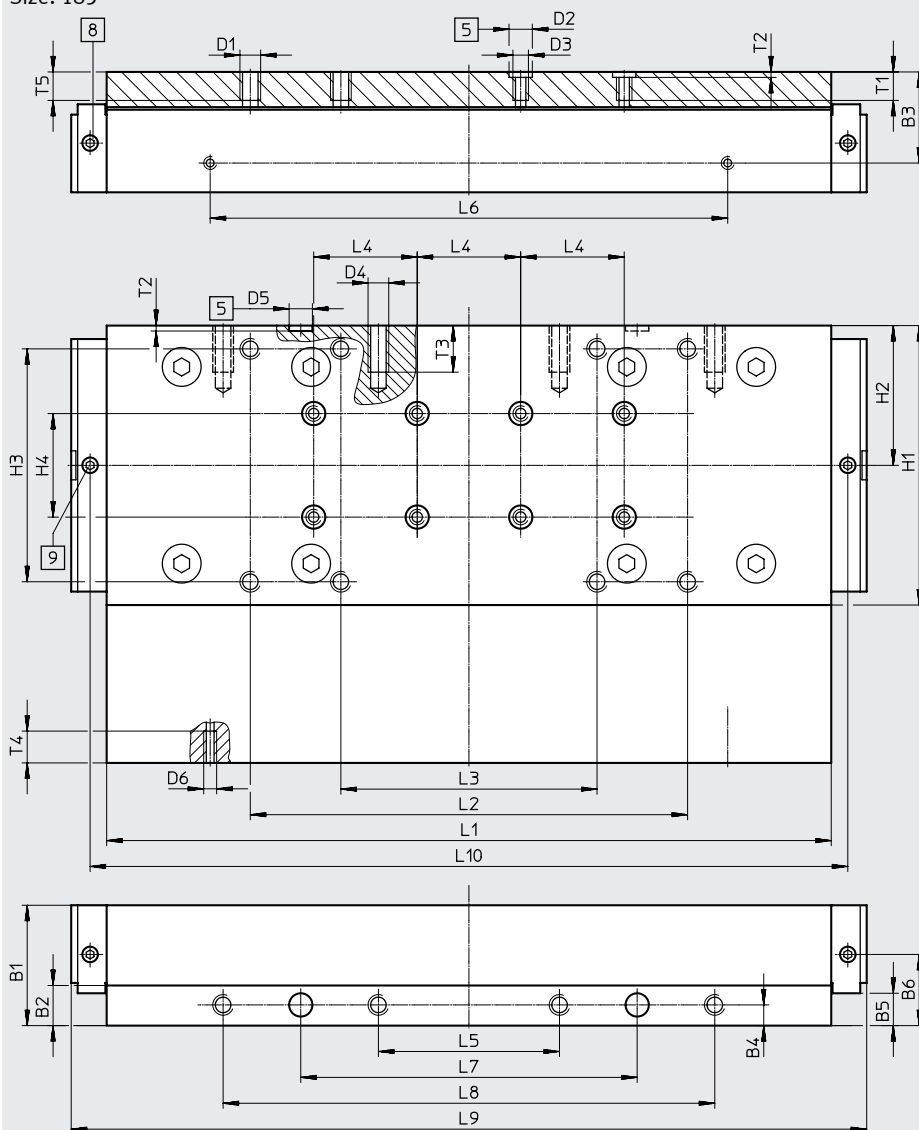

[5] Drilled hole for centring sleeve

[8] Lubricating hole for lubrication adapter
M6 threaded connection, 6 mm deep[9] Lubricating hole for lubrication adapter
M6 threaded connection, 5.5 mm deep

Size	B1	B2	B3	B4	B5	B6	D1	D2 Ø H7	D3	D4
185	46.5	15.5	35.2	8	±0.1 12.5	27.5	M8	9	M6	M8

Size	D5 Ø H7	D6	H1	H2	H3	H4	L1	L2	L3	L4
185	9	M5	108	54	±0.2 90	±0.03 40	±0.1 282.8	±0.2 169	±0.2 99	±0.03 40

Size	L5	L6	L7	L8	L9	L10	T1	T2	T3	T4	T5
185	±0.2 70	±0.1 200	±0.05 130	±0.2 190	307.4	292.8	11	±0.1 2.1	18	12.3	12


Datasheet

Dimensions

Download CAD data → www.festo.com

GV-C – Extended slide with lubrication adapter

Size: 70

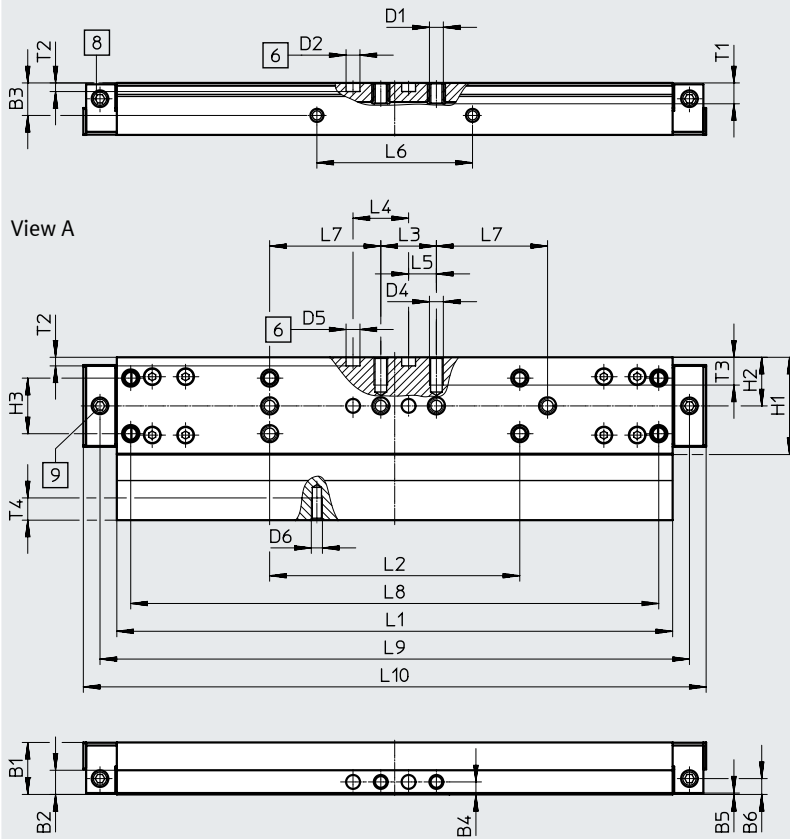

- [6] Drilled hole for centring pin
 [8] Lubricating hole for lubrication adapter
 M6 threaded connection, 6 mm deep
 [9] Lubricating hole for lubrication adapter
 M6 threaded connection, 5.5 mm deep

Size	B1	B2	B3	B4	B5	B6	D1	D2 Ø H7	D4	D5 Ø H7
70	18.7	8.7	11.7	4.5	0.5	5.7	M5	5	M5	5

Size	D6	H1	H2	H3	L1	L2	L3	L4	L5	L6
				±0.1	±0.1	±0.1	±0.1	±0.03		±0.1
70	M4	35	17.5	20	200	90	20	20	10	56

Size	L7	L8	L9	L10	L11	T1	T2	T3	T4
	±0.1	±0.2					+0.1		
70	40	190	212.1	224.1	30	7.5	3.1	10	6


Datasheet

Dimensions


Download CAD data → www.festo.com

GV-C – Extended slide with lubrication adapter

Size 80

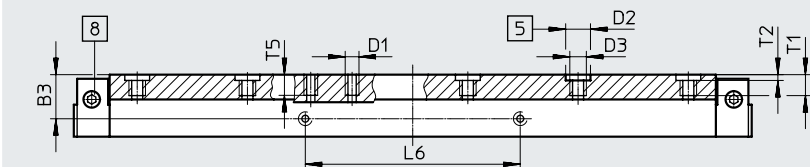

View A

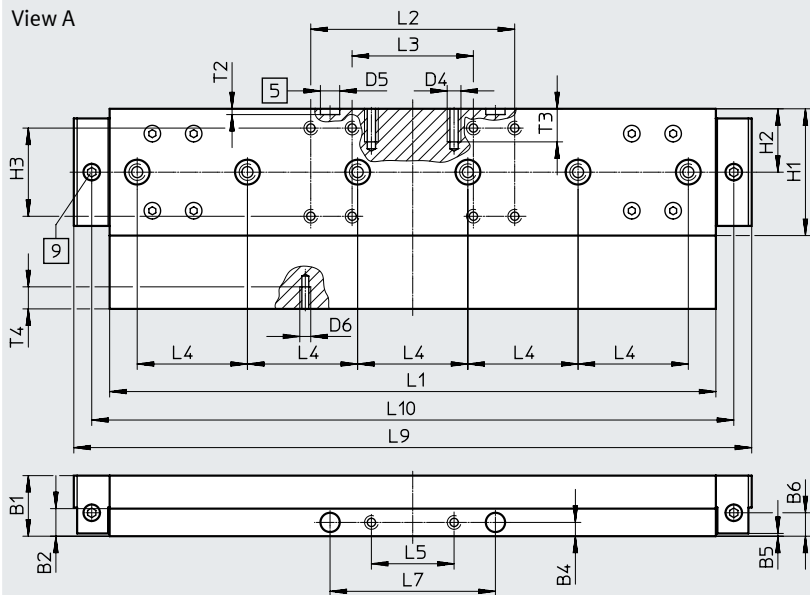

- [5] Drilled hole for centring sleeve
 [6] Drilled hole for centring pin
 [8] Lubricating hole for lubrication adapter
 M6 threaded connection, 6 mm deep
 [9] Lubricating hole for lubrication adapter
 M6 threaded connection, 5.5 mm deep

Size	B1	B2	B3	B4	B5	B6	D1	D2 ø H7	D3	D4
70	22	10	16	5	1 ±0.1	8.5	M5	9	M6	M5
Size	D5 ø H7	D6	H1	H2	H3	L1	L2	L3	L4	L5
70	7 H7	M4	46	23	32 ±0.2	220 ±0.1	74 ±0.2	44 ±0.2	40 ±0.03	30 ±0.1
Size	L6	L7	L9	L10	L11	T1	T2	T3	T4	T5
70	78 ±0.1	60 ±0.05	246	233	30	8.6	2.1 +0.1	12	7	7.5


Datasheet

Dimensions

[Download CAD data → www.festo.com](http://www.festo.com)

GV-C – Extended slide with lubrication adapter


Size: 120

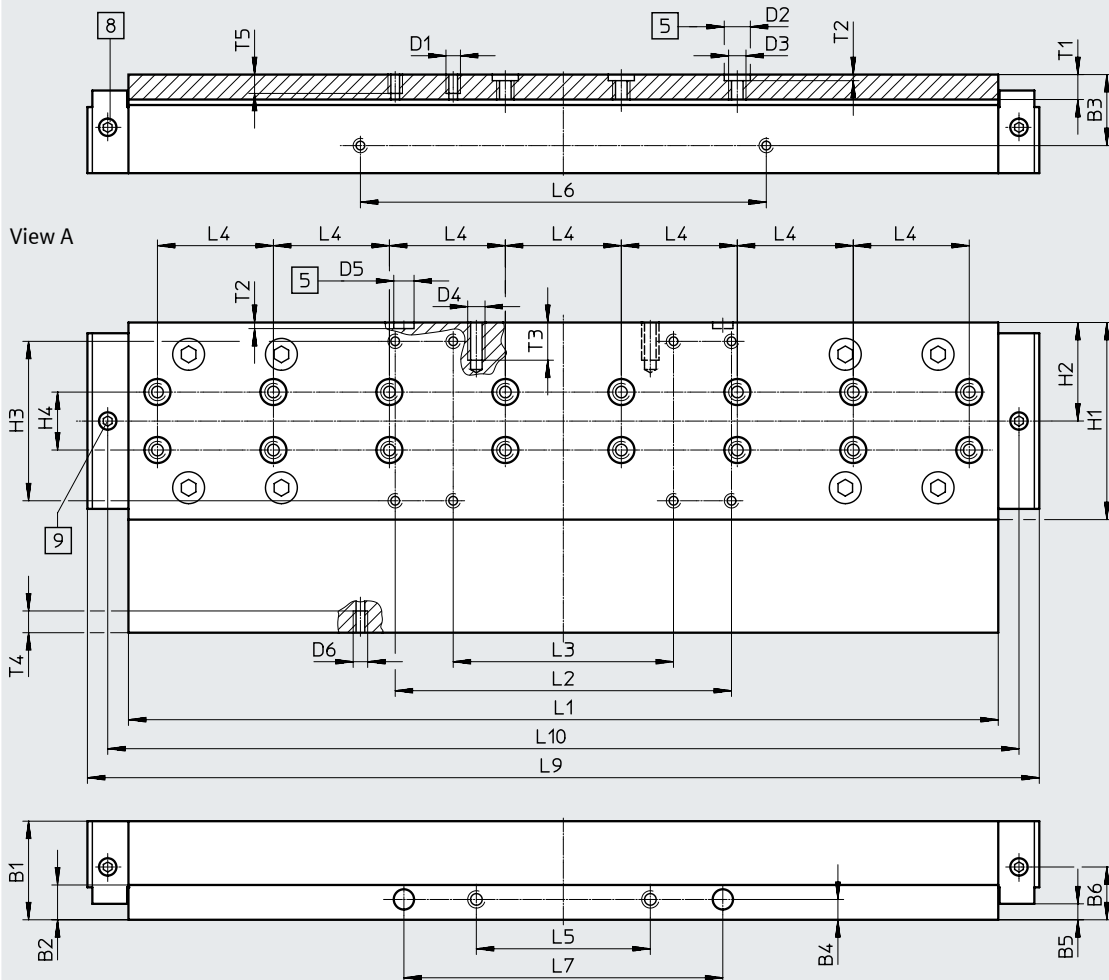

- [5] Drilled hole for centring sleeve
 [8] Lubricating hole for lubrication adapter
 M6 threaded connection, 6 mm deep
 [9] Lubricating hole for lubrication adapter
 M6 threaded connection, 5.5 mm deep

Size	B1	B2	B3	B4	B5	B6	D1	D2 ø H7	D3	D4
120	34	12	24.5	7	5.5 ±0.1	13.9	M5	9	M6	M6
Size	D5 ø H7	D6	H1	H2	H3	H4	L1	L2	L3	L4
120	7	M5	68	34	55 ±0.2	20	300 ±0.1	116 ±0.2	76 ±0.2	40 ±0.03
Size	L5	L6	L7	L9	L10	T1	T2	T3	T4	T5
120	60 ±0.1	140 ±0.1	110 ±0.05	328.3	314.3	8.6	2.1 +0.1	13	8	7.5

Download CAD data → www.festo.com



Size	L7	L8	L9	L10	L11	T1	T2	T3	T4	T5
	±0.05	±0.2			±0.03		+0.1			
185	130	190	407.4	392.8	80	11	2.1	18	10	12


Datasheet

Dimensions


1HL/1HR/2H – With clamping unit

Size 80

1-channel, left

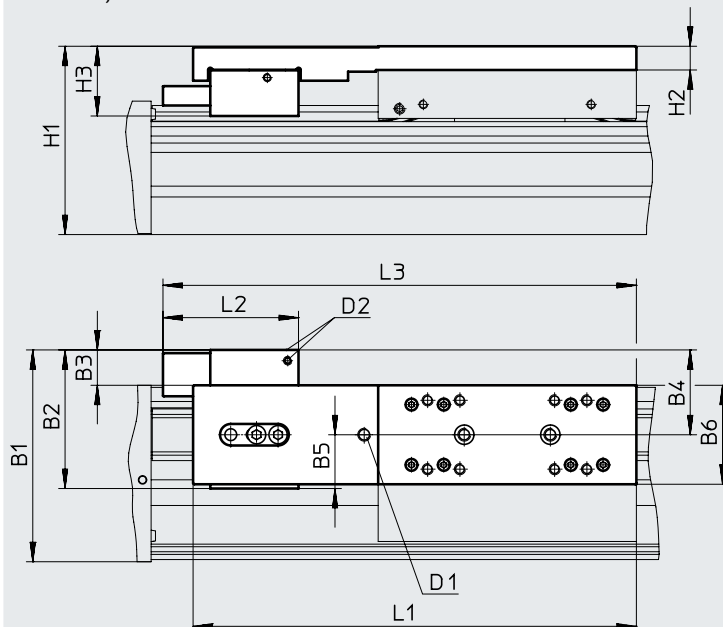

1-channel, right

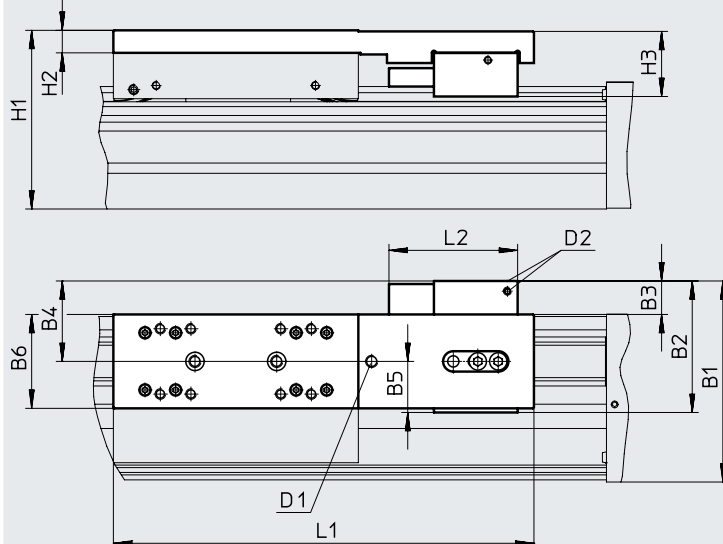

D2 Compressed air supply port

Download CAD data → www.festo.com

Datasheet


Dimensions

Download CAD data → www.festo.com

1HL/1HR/2H – With clamping unit

Size 80

2-channel

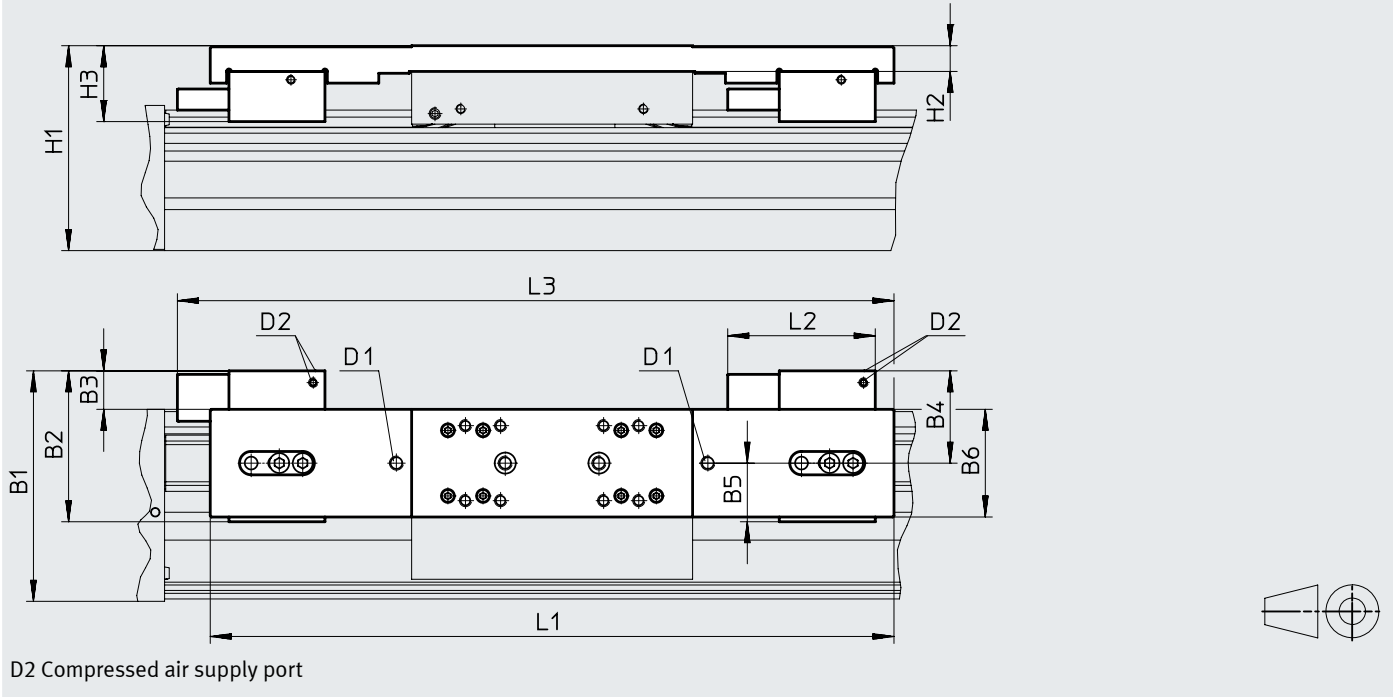

D2 Compressed air supply port

Type	B1	B2	B3	B4	B5	B6	H1	H2	H3	D1	D2	L1	L2	L3
EGC-80-....-1HL-PN	98.4	64.4	17.4	39.4	25	46	87.5	11	32.4	M6	M5	206	63	220
EGC-80-....-1HR-PN														–
EGC-80-....-C-1HL-PN														220
EGC-80-....-C-1HR-PN														–
EGC-80-....-2H-PN												292		306
EGC-80-....-C-2H-PN														

Datasheet


Dimensions

1HL/1HR/2H – With clamping unit


Size 120/185

1-channel, left

Download CAD data → www.festo.com

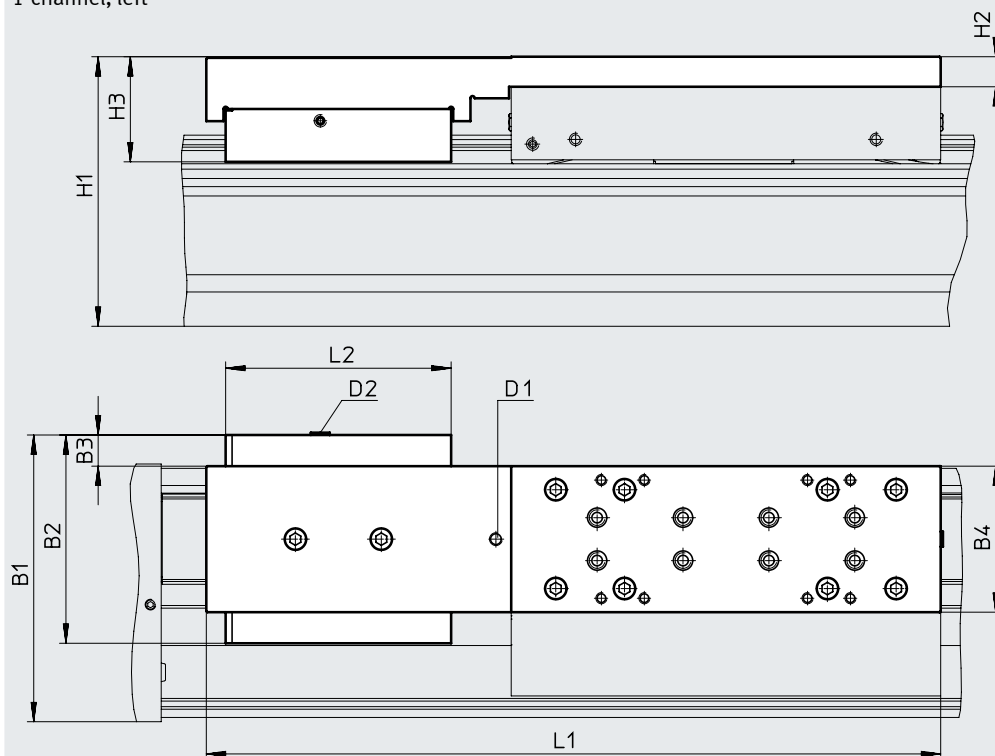

1-channel, right

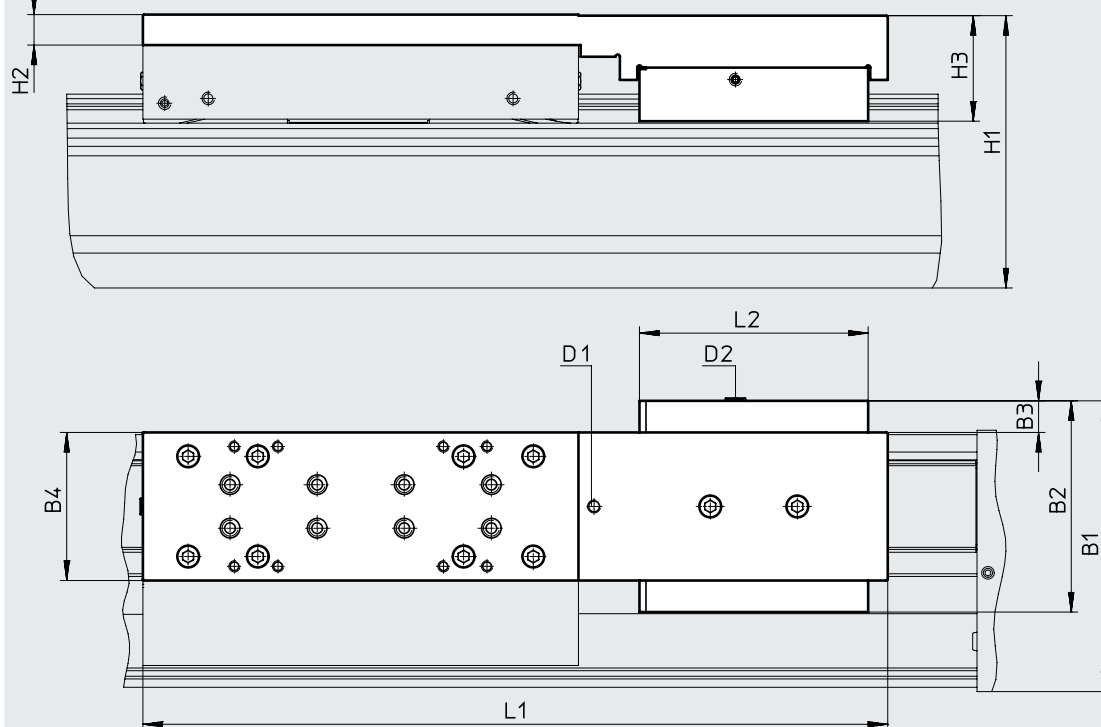

D2 Compressed air supply port

Datasheet


Dimensions

Download CAD data → www.festo.com

1HL/1HR/2H – With clamping unit

Size 120/185

2-channel

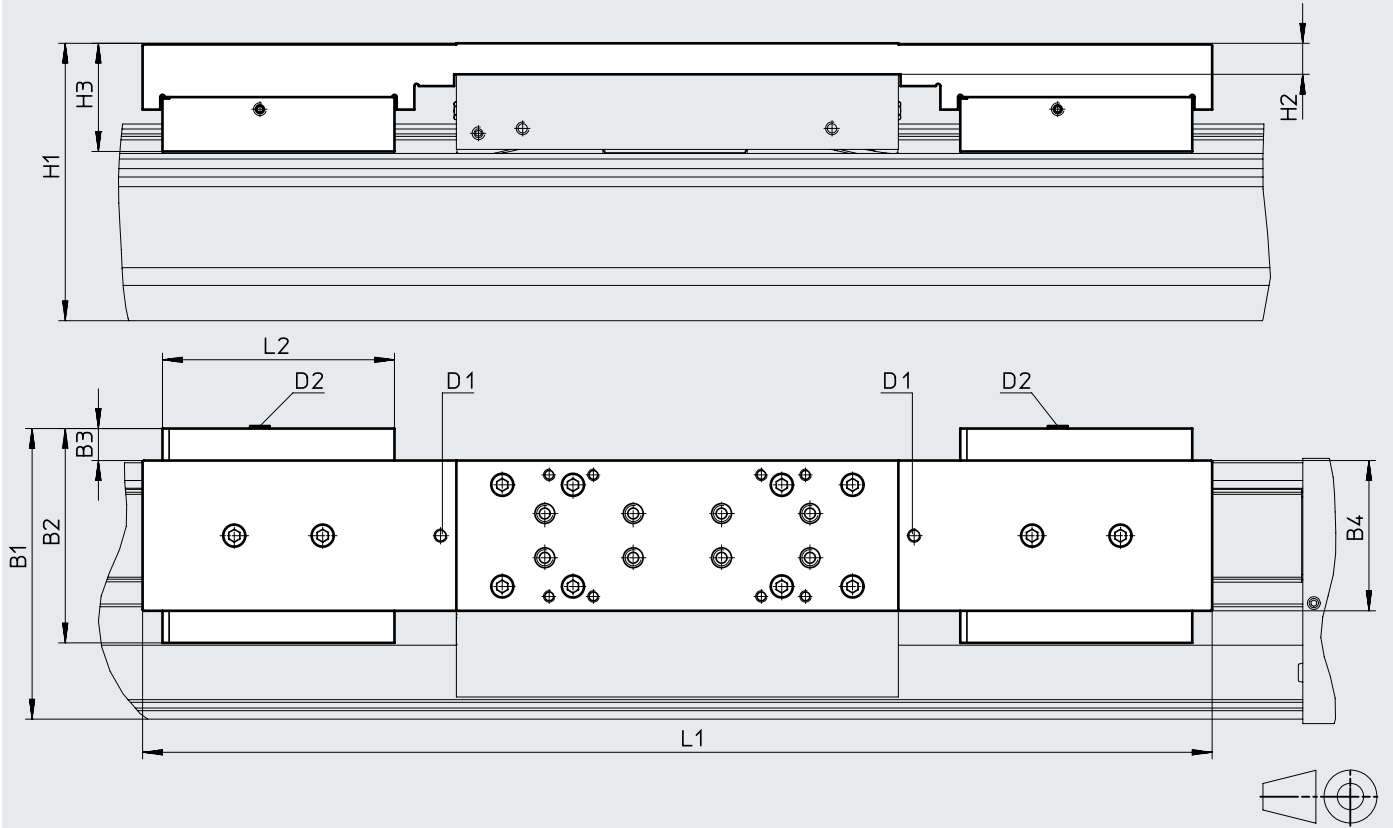


D2 Compressed air supply port

Type	B1	B2	B3	B4	H1	H2	H3	D1	D2	L1	L2
Size: 120											
EGC-120-...-1HL-PN	133.5	97	15.5	68	125.5	14	48.9	M6	M5	342	105
EGC-120-...-1HR-PN										484	
EGC-120-...-C-1HL-PN											
EGC-120-...-C-1HR-PN											
EGC-120-...-2H-PN											
EGC-120-...-C-2H-PN											
Size: 185											
EGC-185-...-1HL-PN	196.5	131	12.5	108	189.5	17	64.1	M6	M5	432	109
EGC-185-...-1HR-PN										584	
EGC-185-...-C-1HL-PN											
EGC-185-...-C-1HR-PN											
EGC-185-...-2H-PN											
EGC-185-...-C-2H-PN											

Ordering data – Modular product system


Order code

Minimum information

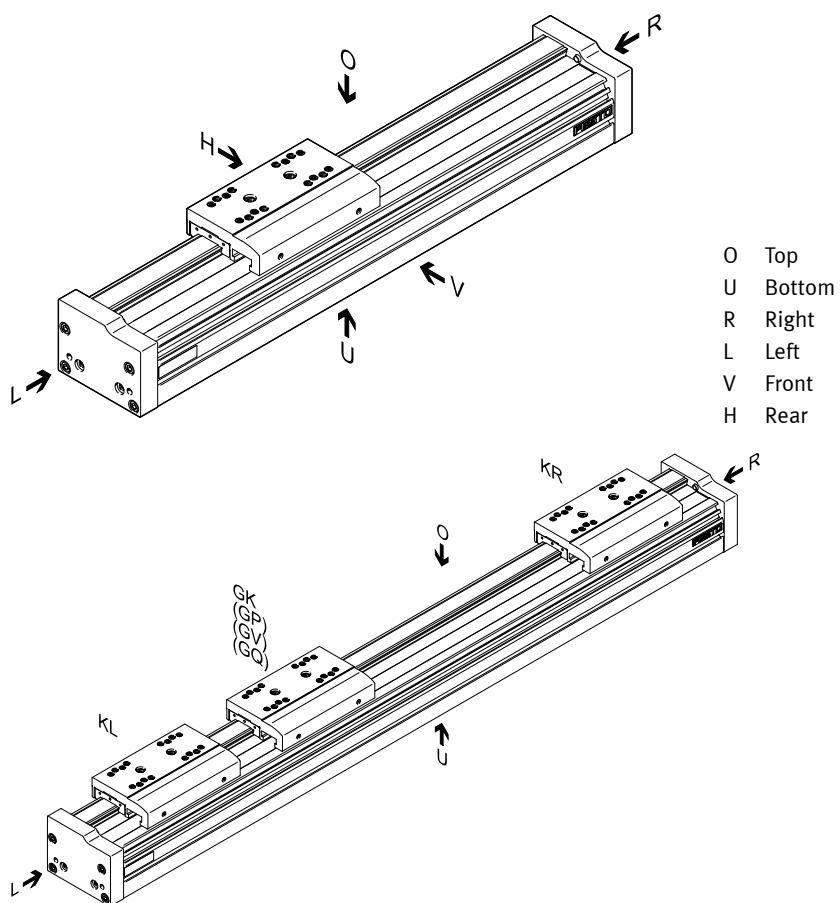

Ordering data – Modular product system

Order code
Accessories

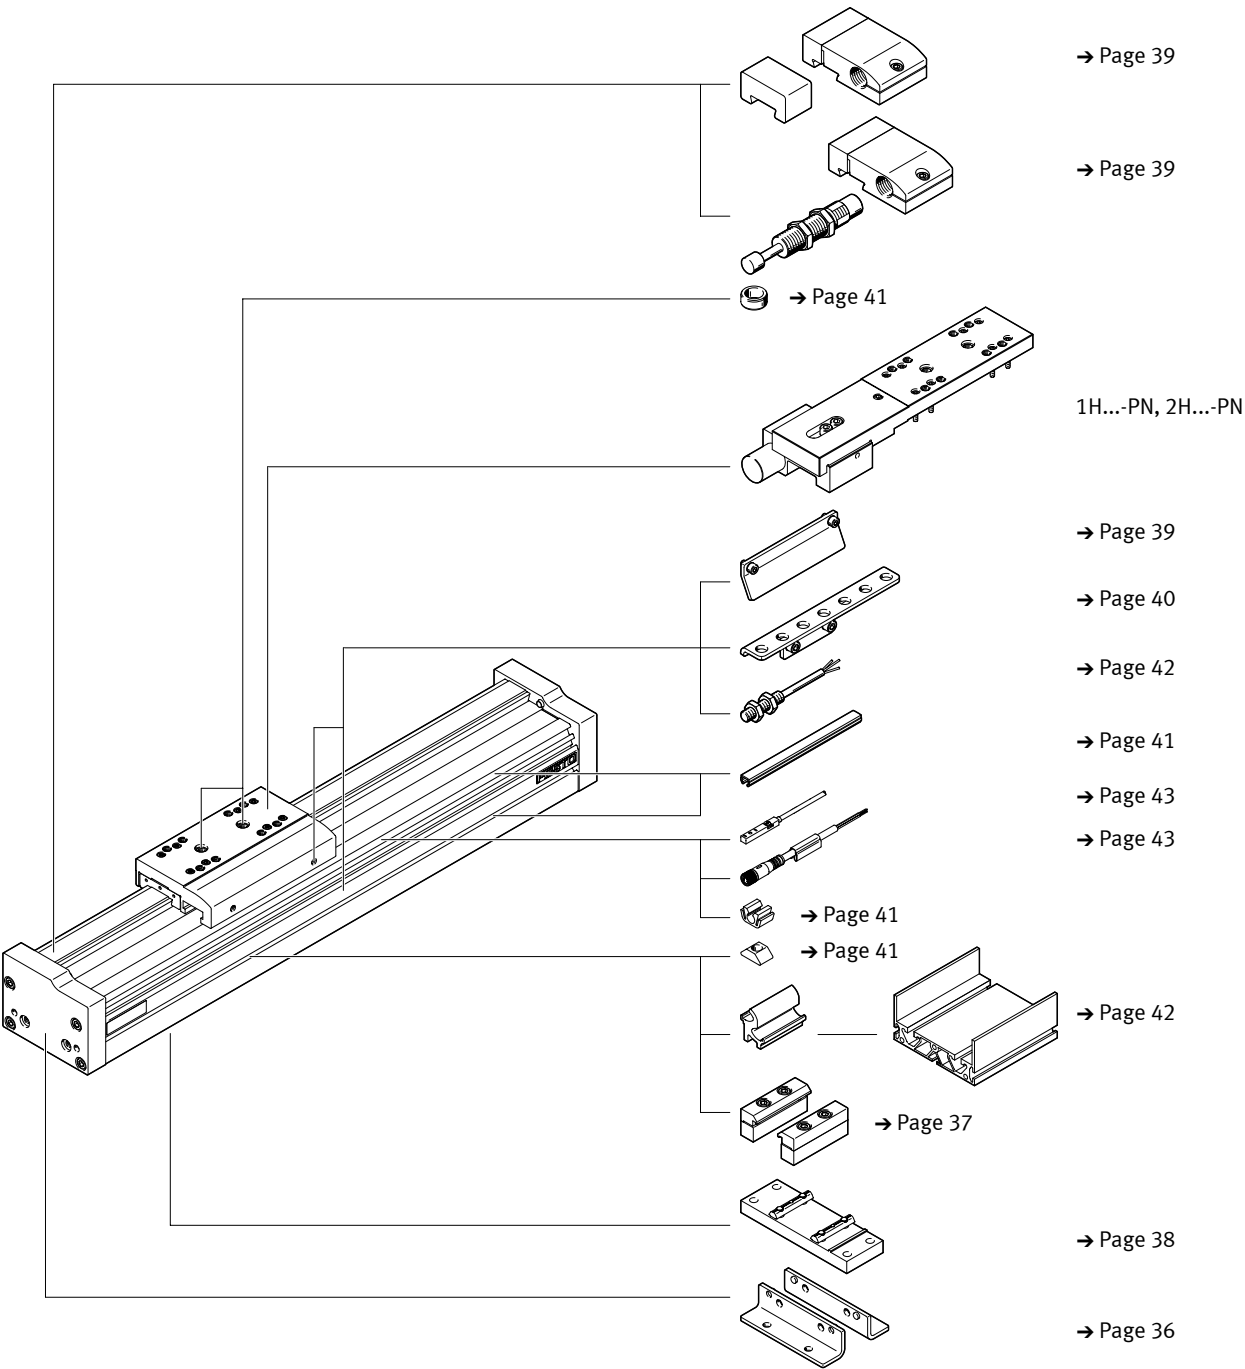

Ordering data – Modular product system


Ordering table							
Size	70	80	120	185	Conditions	Code	Enter code
Module no.	558864	558865	558866	558868			
Design	Guide axis					EGC	EGC
Size	70	80	120	185		-...	-...
Stroke [mm]	50 ... 5000	50 ... 8500	50 ... 8500	50 ... 8500	[1]	-...	-...
Guide	Guide axis					-FA	-FA
Stroke reserve [mm]	0 ... 999 (0 = no stroke reserve)				[1]	-...H	
Slide	Standard slide					-GK	
	Extended slide, protected			–		-GQ	
	Standard slide, protected			–		-GP	
	Extended slide					-GV	
Additional slide	Left	Additional slide, standard, left			[2]	-KL	
	Right	Additional slide, standard, right			[2]	-KR	
Lubrication function	Standard						
	Lubrication adapter				[6]	-C	
Clamping unit	–	1-channel, left			[3]	-1HL	
	–	1-channel, right			[3]	-1HR	
	–	2-channel			[3]	-2H	
Actuation type	–	Pneumatic				-PN	

- [1] ~... The sum of the stroke length and 2x stroke reserve must not exceed the maximum stroke length
- [2] **KL, KR** If the protected slide variant (GQ, GP) is selected, the additional slide (KL, KR) is also protected
 If the extended slide variant (GQ, GV) is selected, the additional slide (KL, KR) is not extended
 If the slide with lubrication adapter (GK-C) is selected, the additional slide (KL, KR) is also supplied with lubrication adapter
 Working stroke reduction in combination with additional slide (KL, KR) a page 10
- [3] **1HL, 1HR, 2H** Not with slide GQ, GV or with additional slide KL, KR
 Only with PN
 Working stroke reduction in combination with clamping unit (1HL, 1HR, 2H) a page 10
- [6] **C** Not with slide GP, GQ

Accessories

Foot mounting HPE

Material:
Galvanised steel
RoHS-compliant

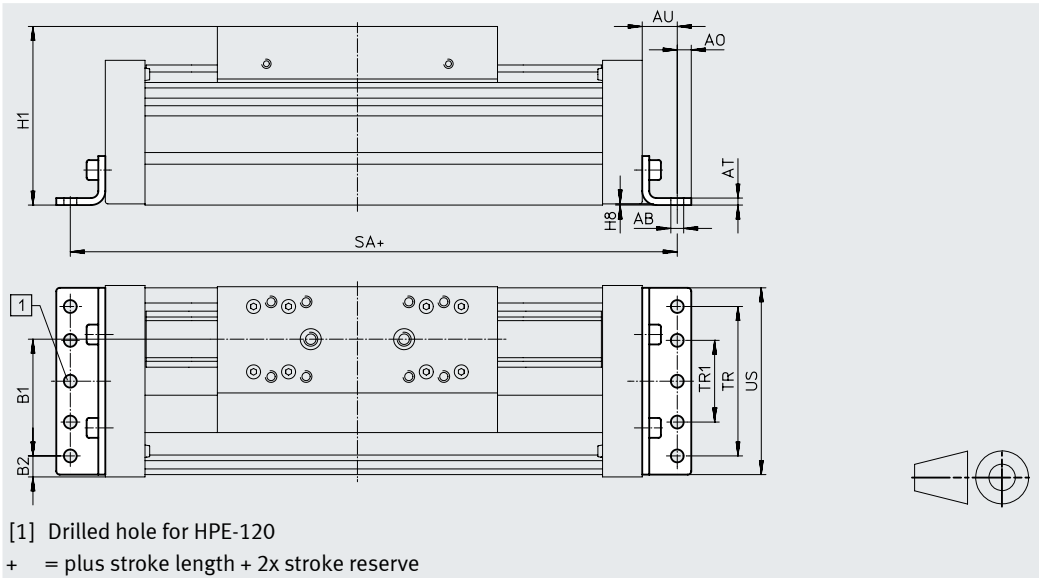


Dimensions and ordering data								
For size	AB Ø	A0	AT	AU	B1	B2	H1	H8
70	5.5	6	3	13	37	14.5	64	0.5
80	5.5	6	3	15	38	21	76.5	0.5
120	9	8	6	22	65	20	111.5	0.6
185	9	12	8	25	118	13	172.5	0.5

For size	SA	TR	TR1	US	Weight [g]	Part no.	Type
70	189	40	–	67	115	558321	HPE-70
80	220	40	–	80	150	558322	HPE-80
120	350	80	–	116	578	558323	HPE-120
185	456	160	80	182	1438	558325	HPE-185

Accessories

Profile mounting MUE

Material:
Anodised aluminium
RoHS-compliant

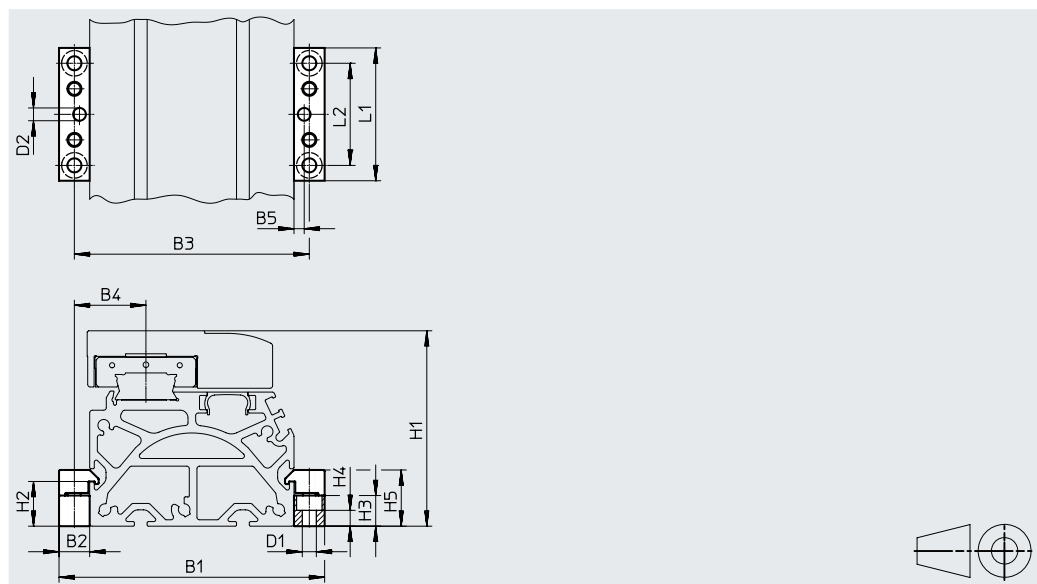

Dimensions and ordering data


For size	B1	B2	B3	B4	B5	D1 ø	D2 ø H7	H1	H2
70	91	12	79	22.5	4	5.5	5	64	17.5
80	104	12	92	28	4	5.5	5	76.5	17.5
120	154	19	135	42.5	4	9	5	111.5	16
185	220	19	201	62.5	4	9	5	172.5	16

For size	H3	H4	H5	L1	L2	Weight [g]	Part no.	Type
70	12	6.2	22	52	40	80	558043	MUE-70/80
80	12	6.2	22	52	40	80	558043	MUE-70/80
120	14	5.5	29.5	90	40	290	558044	MUE-120/185
185	14	5.5	29.5	90	40	290	558044	MUE-120/185

Accessories

Central support EAHF

Material:
Anodised aluminium
RoHS-compliant

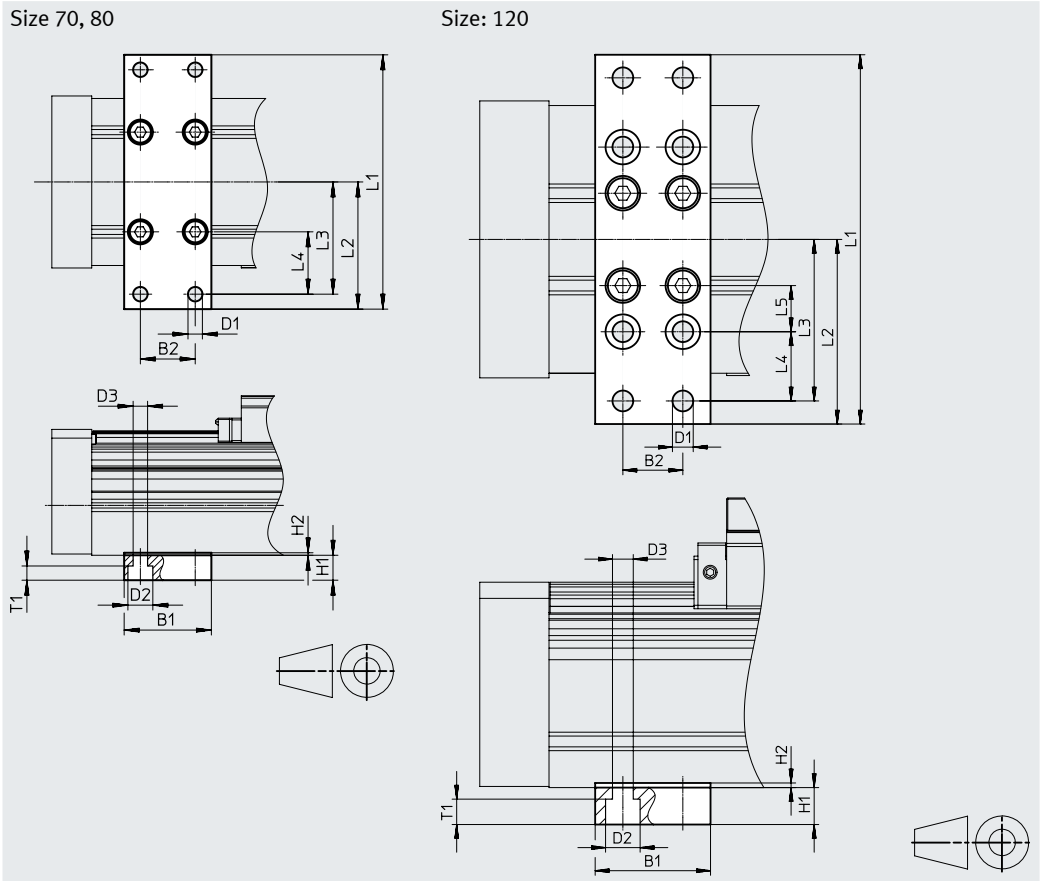

Dimensions and ordering data								
For size	B1	B2	D1 Ø	D2 Ø	D3 Ø	H1	L1	
70	35	22	5.8	10	5.8	10	102	
80							112	
120	50	26	9	15	9	16	160	

For size	L2	L3	L4	L5	T1	Weight [g]	Part no.	Type
70	51	45	25	–	5.7	113	2349256	EAHF-L5-70-P
80	56	50	30			123	3535188	EAHF-L5-80-P
120	80	70	30	20	11	384	2410274	EAHF-L5-120-P

Accessories

Shock absorber retainer KYE

Emergency buffer NPE →

Page 41



Shock absorber YSRW → Page 41

Material:

Anodised aluminium

RoHS-compliant

**Cannot be used in combination
with the variant GP or GK-C and
1H...-PN, 2H-PN.**

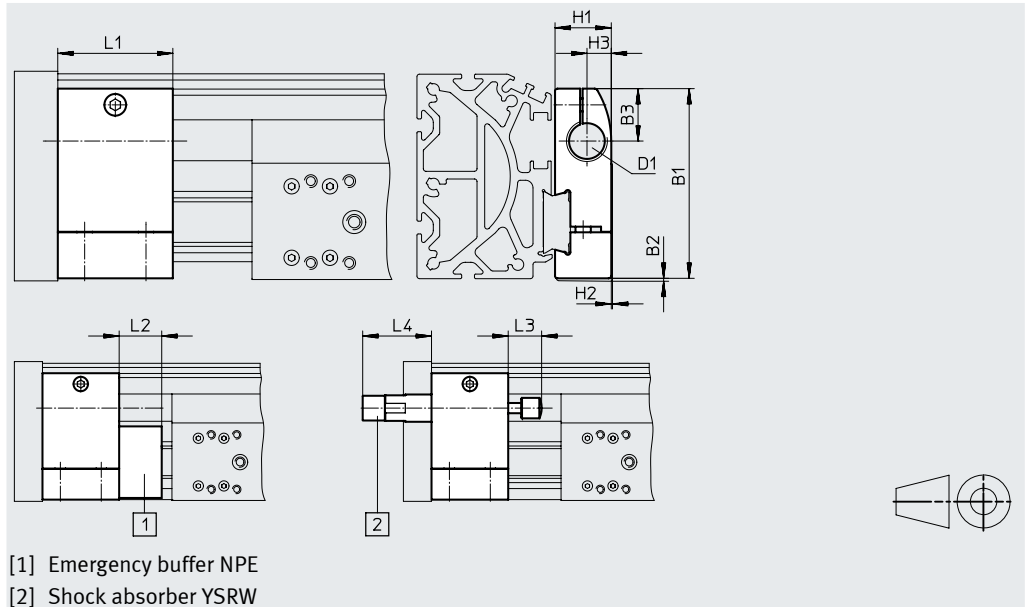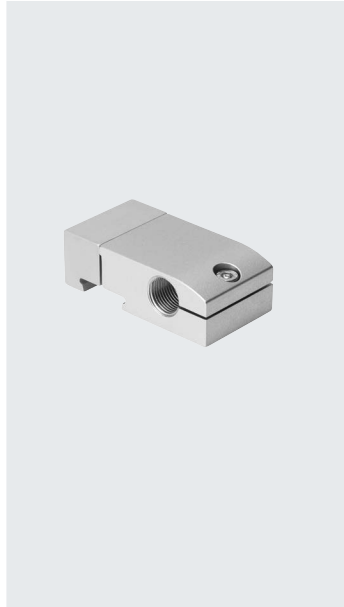

Dimensions and ordering data

For size	B1	B2	B3	D1	H1	H2	H3	L1	L2	L3	L4	Weight [g]	Part no.	Type
70	57.5	1	16.5	M12X1	18.2	0.5	7.5	30	15	14	32	75	557584	KYE-70
80	74.2	1	20.5	M16X1	22	0.5	9.5	45	25	20	41	170	557585	KYE-80
120	108.5	1	26	M22X1.5	31	1	14	60	40	26	48.5	680	557586	KYE-120
185	168	1	37	M26X1.5	42	4	18	75	60	34	58.5	1075	557587	KYE-185


Switch lug SF-EGC-1

For sensing via proximity switch
SIES-8M

Material:

Galvanised steel

RoHS-compliant

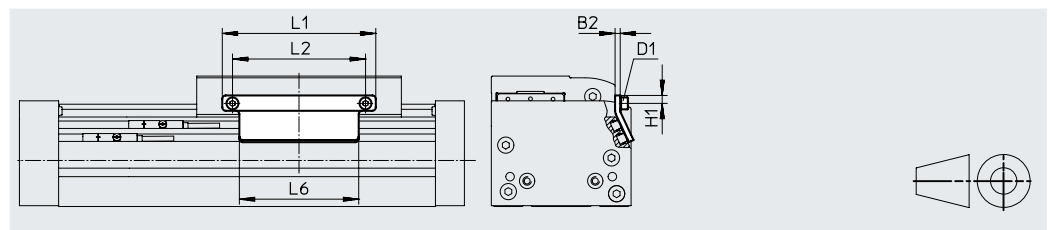

Dimensions and ordering data

For size	B2	D1	H1	L1	L2	L6	Weight [g]	Part no.	Type
70	3	M4	4.65	70	56	50	50	558047	SF-EGC-1-70
80	3	M4	4.65	90	78	70	63	558048	SF-EGC-1-80
120	3	M5	8	170	140	170	147	558049	SF-EGC-1-120
185	3	M5	10	230	200	230	246	558051	SF-EGC-1-185

Accessories


Switch lug SF-EGC-2
For sensing with proximity switch
SIEN-M8B or SIES-8M



Material:
Galvanised steel
RoHS-compliant

Sensor bracket HWS-EGC
For proximity switch SIEN-M8B

Material:
Galvanised steel
RoHS-compliant

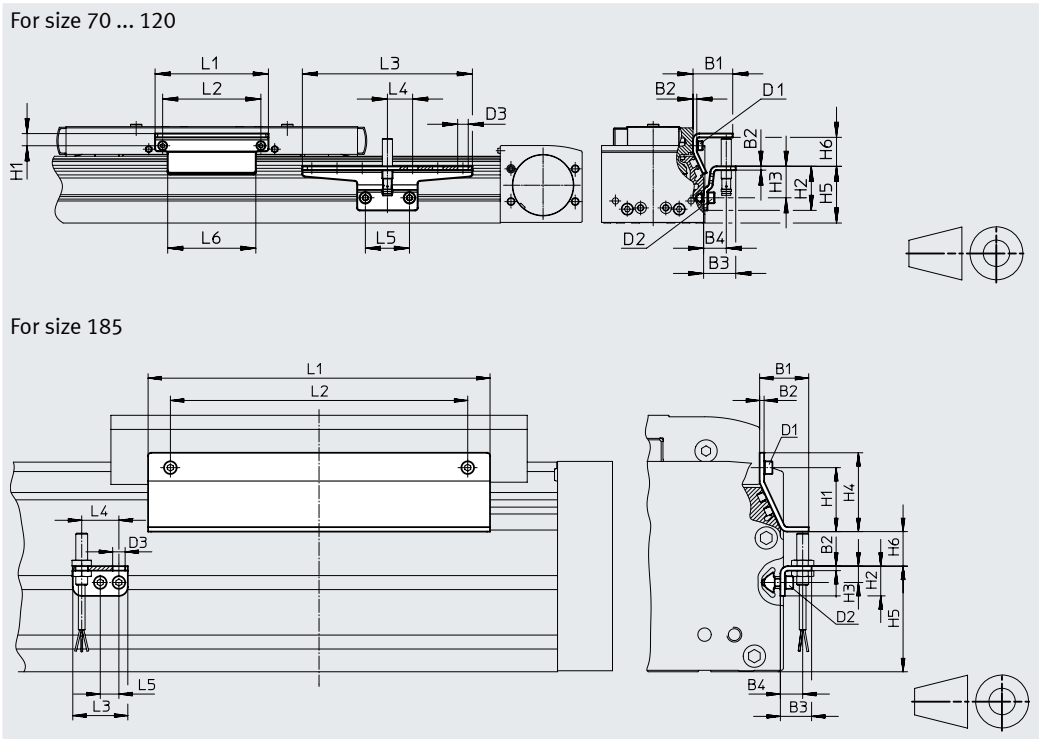



Dimensions and ordering data										
For size	B1	B2	B3	B4	D1	D2	D3 ø	H1	H2	
70	31.5	3	25.5	18	M4	M5	8.4	9.5	35	
80	31.5	3	25.5	18	M4	M5	8.4	9.5	35	
120	32	3	25.5	18	M5	M5	8.4	13.2	65	
185	33	3	25.5	15	M5	M5	8.4	43	20	

For size	H3	H4	H5	H6 max.	L1	L2	L3	L4	L5	L6
70	25	–	45	13.5	70	56	135	20	35	50
80	25	–	45	23.5	90	78	135	20	35	70
120	55	–	75	24	170	140	215	20	35	170
185	11	53	71	25.5	230	200	37	25	12.5	230

For size	Weight [g]	Part no.	Type
Switch lug			
70	100	558052	SF-EGC-2-70
80	130	558053	SF-EGC-2-80
120	277	558054	SF-EGC-2-120
185	390	558056	SF-EGC-2-185

For size	Weight [g]	Part no.	Type
Sensor bracket			
70	110	558057	HWS-EGC-M5
80	110	558057	HWS-EGC-M5
120	217	570365	HWS-EGC-M8-B
185	58	560517	HWS-EGC-M8:KURZ (SHORT)

Accessories

Ordering data		For size	Description	Part no.	Type	PU ¹⁾
Emergency buffer NPE						
	70	For use in combination with shock absorber retainer KYE		562581	NPE-70	1
	80			562582	NPE-80	
	120			562583	NPE-120	
	185			562584	NPE-185	
Shock absorber YSRW						
	70	For use in combination with shock absorber retainer KYE		191194	YSRW-8-14	1
	80			191196	YSRW-12-20	
	120			191197	YSRW-16-26	
	185			191198	YSRW-20-34	
Slot nut NST						
	70, 80	For mounting slot		150914	NST-5-M5-1	1
				8047843	NST-5-M5-10	10
				8047878	NST-5-M5-50	50
	120, 185	For mounting slot		150915	NST-8-M6-1	1
				8047868	NST-8-M6-10	10
				8047869	NST-8-M6-50	50
Centring pin/sleeve ZBS/ZBH						
	70	For slide		150928	ZBS-5	10
	80, 120, 185			8137184	ZBH-9-B	
Slot cover ABP						
	70, 80	For mounting slot Every 0.5 m		151681	ABP-5	2
	120, 185			151682	ABP-8	
Slot cover ABP-S						
	70 ... 185	For sensor slot Every 0.5 m		563360	ABP-5-S1	2
Clip SMBK						
	70 ... 185	For sensor slot, for mounting the proximity switch cables		534254	SMBK-8	10

1) Packaging unit


Accessories

Mounting options between axis and support profile

Depending on the adapter kit, the spacing between the axis and the support profile is:



$x = 20 \text{ mm}$ or 50 mm

The support profile must be mounted using at least 2 adapter kits. For longer strokes, an adapter kit must be used every 500 mm.


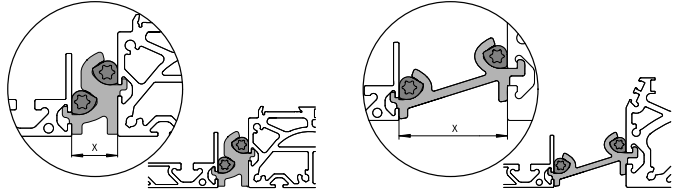




Ordering data					
	For size	Description	Part no.	Type	PU ¹⁾
Adapter kit DHAM					
	80	• For mounting the support profile on the axis • Spacing between axis and profile is 20 mm	562241	DHAM-ME-N1-CL	1
	120		562242	DHAM-ME-N2-CL	
	70, 80	• For mounting the support profile on the axis • Spacing between axis and profile is 50 mm	574560	DHAM-ME-N1-50-CL	
	120		574561	DHAM-ME-N2-50-CL	
Support profile HMIA					
	70 ... 120	• For guiding an energy chain	539379	HMIA-E07-	1

1) Packaging unit

Ordering data – Proximity switches for T-slot, inductive						Datasheets → Internet: sies
	Type of mounting	Electrical connection	Switching output	Cable length [m]	Part no.	Type
N/O						
	Inserted in the slot from above, flush with the cylinder profile	Cable, 3-core	PNP	7.5	551386	SIES-8M-PS-24V-K-7.5-OE
		Plug M8x1, 3-pin		0.3	551387	SIES-8M-PS-24V-K-0.3-M8D
		Cable, 3-core	NPN	7.5	551396	SIES-8M-NS-24V-K-7.5-OE
		Plug M8x1, 3-pin		0.3	551397	SIES-8M-NS-24V-K-0.3-M8D
N/C						
	Inserted in the slot from above, flush with the cylinder profile	Cable, 3-core	PNP	7.5	551391	SIES-8M-PO-24V-K-7.5-OE
		Plug M8x1, 3-pin		0.3	551392	SIES-8M-PO-24V-K-0.3-M8D
		Cable, 3-core	NPN	7.5	551401	SIES-8M-NO-24V-K-7.5-OE
		Plug M8x1, 3-pin		0.3	551402	SIES-8M-NO-24V-K-0.3-M8D

Accessories

Ordering data – Proximity switch M8 (round design), inductive						Datasheets → Internet: sien
	Electrical connection	LED	Switching output	Cable length [m]	Part no.	Type
N/O						
	Cable, 3-core	■	PNP	2.5	150386	SIEN-M8B-PS-K-L
	Plug M8x1, 3-pin	■	PNP	–	150387	SIEN-M8B-PS-S-L
N/C						
	Cable, 3-core	■	PNP	2.5	150390	SIEN-M8B-PO-K-L
	Plug M8x1, 3-pin	■	PNP	–	150391	SIEN-M8B-PO-S-L

Ordering data – Connecting cables						Datasheets → Internet: neba	
	Electrical connection 1, connection technology	Electrical connection 1, cable outlet	Electrical connection 2, connection technology	Electrical connection 2, number of pins/cores	Cable length [m]	Part no.	Type
	M8x1 A-coded to EN 61076-2-104	Straight	Open end	3	2.5	8078223	NEBA-M8G3-U-2.5-N-LE3
					5.0	8078224	NEBA-M8G3-U-5-N-LE3
	M8x1 A-coded to EN 61076-2-104	Angled	Open end	3	2.5	8078230	NEBA-M8W3-U-2.5-N-LE3
					5.0	8078231	NEBA-M8W3-U-5-N-LE3