



Remote I/O system CPX-AP-I

FESTO

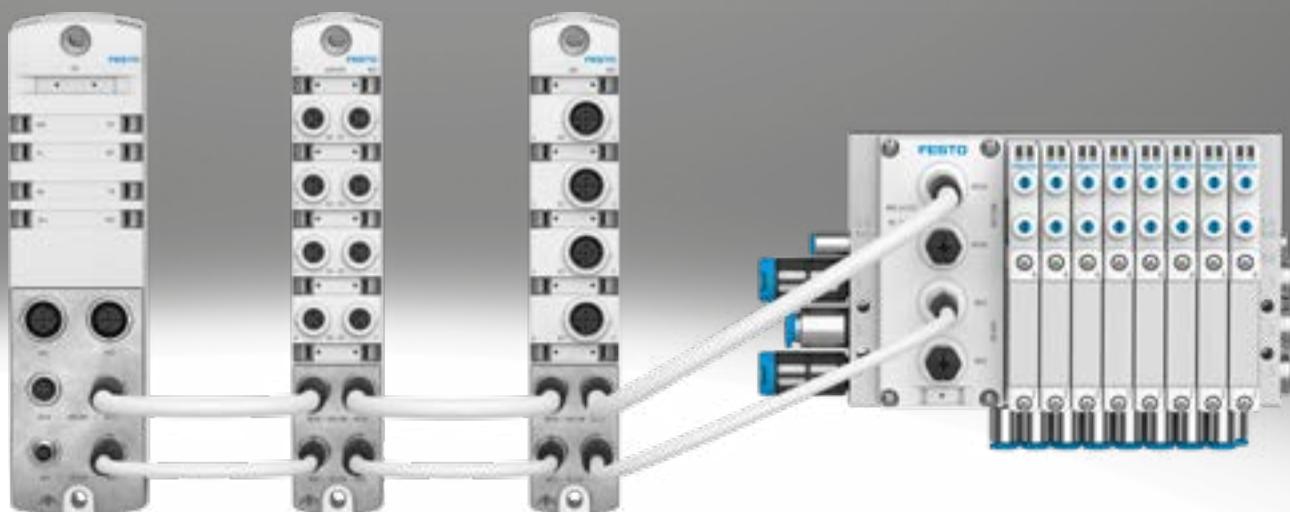

Key features

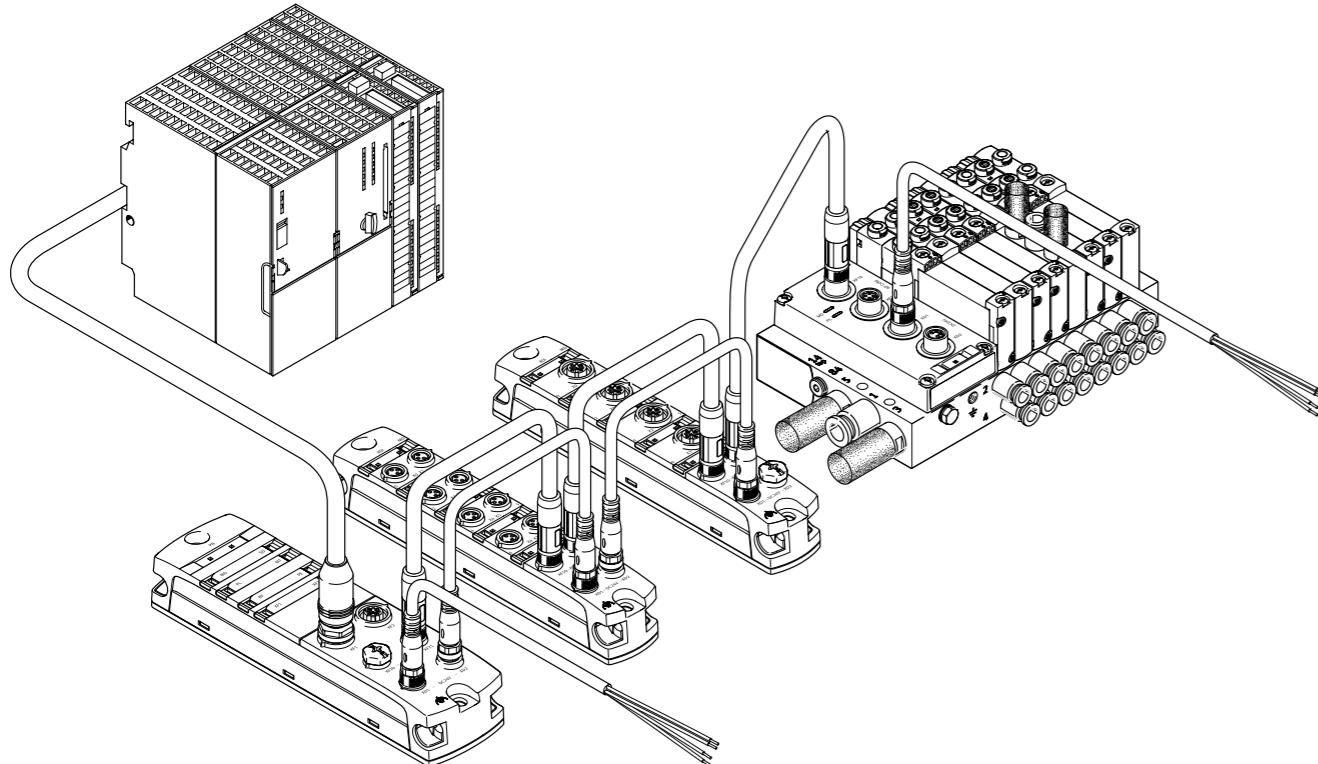

Key features

CPX-AP-I is a flexible, decentralised, compact and lightweight remote I/O system with a high protection rating IP65/IP67.

The performance of the system is future-proof in terms of future demands on the digital factory, and advantageous compared with a slow point-to-point connection.

The simple structure and high degree of scalability ensure the automation system CPX-AP-I is equipped for future applications:

- Extremely easy assembly
- Separate cables for communication and power supply to create voltage zones and for stable data transfer
- Electrical isolation of output channels
- Digital electronic rating plate available
- Easy firmware update
- Easy access to the system for maintenance via Ethernet
- Easy to integrate
- Real-time capability
- Up to 80 individual modules/valve terminals per bus interface
- Easy to adapt to different control systems by exchanging the bus interface
- Direct connection of valve terminals
- A choice of M8 or M12 electrical connections
- Cable length of up to 50 m between the modules


A remote I/O system CPX-AP-I comprises a bus interface and at least one other module. System communication between the modules takes place via connecting cables. The process data is exchanged cyclically.

The following module types are available:

- Bus interface
- IO-Link master
- Input modules
- I/O modules
- Interface to the valve terminal

Key features

Overview

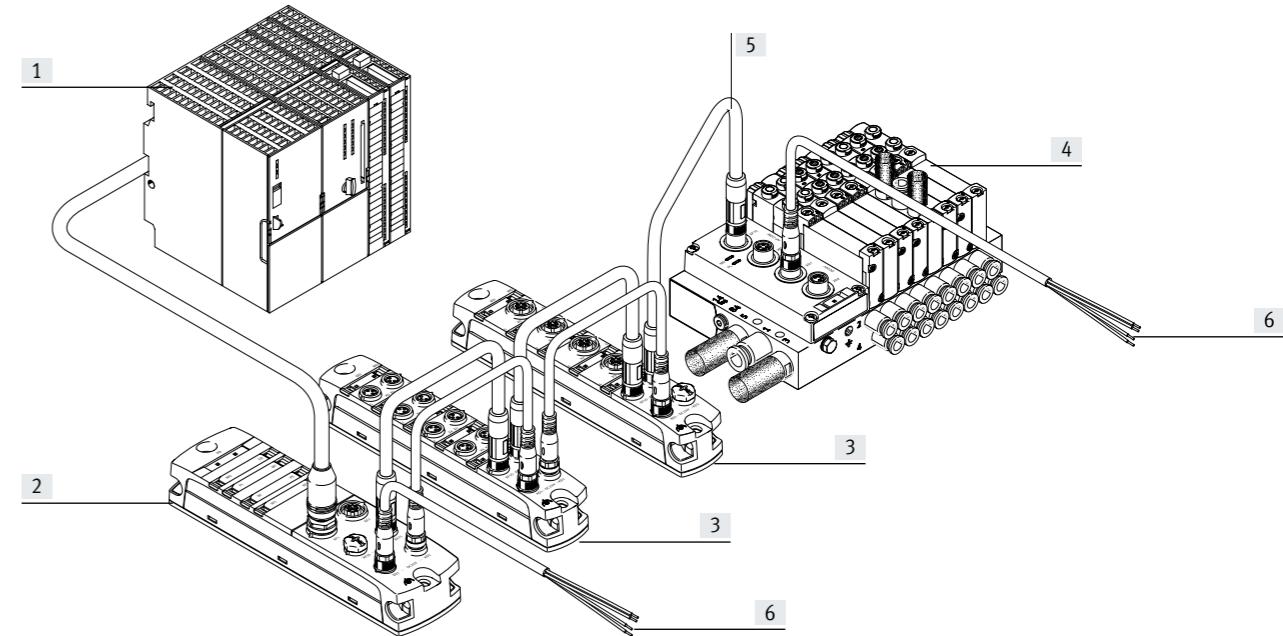

[1] Higher-order controller

[2] Bus interface for connecting the remote I/O system CPX-AP-I to a higher-order controller via a standard bus protocol such as PROFINET

[3] Input module, output module or

input/output module; allows sensors and actuators to be connected to the remote I/O system CPX-AP-I. Up to 80 modules per bus interface possible

[4] Valve terminal with electrical interface for CPX-AP-I. Behaves like an output module within the remote I/O system CPX-AP-I.


[5] Connecting cable for communication between the modules and the bus interface. The maximum line length from the bus interface to the module is 50 m

[6] Connecting cable for supplying power to the components of the remote I/O system CPX-AP-I. Each module can be connected individually or a central supply is transmitted from module to module

Note

The connecting cables are specially designed for the requirements of the remote I/O system CPX-AP-I. The correct operation of the system cannot be guaranteed if variants other than those specified in the accessories are used.

Ordering data – Product options



Configurable product
This product and all its product options can be ordered using the configurator.







The configurator can be found at
[www.festo.com/catalogue/...](http://www.festo.com/catalogue/)
Enter the part number or the type.

| Part no. | Type |
|----------|--------------|
| 8094920 | CPX-AP-I |
| 8000810 | VTUX-A-P-APA |
| 8000815 | VTUX-A-S-APA |
| 8130719 | VTSA-F-FB-AP |
| 8130722 | VTSA-F-CB-AP |
| 8130716 | VTSA-FB-AP |
| 569926 | MPAL-VI |


Product range overview

| Function | Version | Type | → Page/ Internet |
|-----------------------|--|---|--|
| Bus interface | Interface | PROFINET | CPX-AP-I-PN-M12 <ul style="list-style-type: none">• Actuation via PROFINET• Two PROFINET connections• Two connections for system communication• Two connections for power supply and transmission 11 |
| | | PROFIBUS | CPX-AP-I-PB-M12 <ul style="list-style-type: none">• Actuation via PROFIBUS• Two PROFIBUS connections• Two connections for system communication• Two connections for power supply and transmission 17 |
| | | EtherCAT® | CPX-AP-I-EC-M12 <ul style="list-style-type: none">• Actuation via EtherCAT®• Two EtherCAT® connections• Two connections for system communication• Two connections for power supply and transmission 23 |
| | | EtherNet/IP | CPX-AP-I-EP-M12 <ul style="list-style-type: none">• Actuation via EtherNet/IP• Two Ethernet connections• Two connections for system communication• Two connections for power supply and transmission 23 |
| IO-Link master |  | 4 IO-Link® connections | CPX-AP-I-4IOL-M12 <ul style="list-style-type: none">• LED indicator• Master V 1.1• Electrical connection M12x1, 5-pin 35 |
| Input module | Digital |  | 4 inputs CPX-AP-I-4DI <ul style="list-style-type: none">• LED indicator• PNP (positive switching)• Characteristic curve of inputs to IEC 61131-2, type 3• Electrical connection M8x1, 3-pin 41 |
| | |  | 8 inputs CPX-AP-I-8DI <ul style="list-style-type: none">• LED indicator• PNP (positive switching)• Characteristic curve of inputs to IEC 61131-2, type 3• Electrical connection M8x1, 3-pin• Electrical connection M12x1, 5-pin 47 |
| | Analogue |  | 4 inputs CPX-AP-I-4AI <ul style="list-style-type: none">• LED indicator• Current, voltage, temperature or resistance measurement• Electrical connection M12x1, 5-pin 55 |

Product range overview

| Function | Version | Type | → Page/ Internet |
|--|-----------------------------|---|---|
| Output module | Digital |  | 8 outputs CPX-AP-I-8DO <ul style="list-style-type: none">• LED indicator• PNP (positive switching)• Characteristic curve of outputs to IEC 61131-2, type 0.5• Electrical connection M8x1, 3-pin• Electrical connection M12x1, 5-pin 61 |
| Input/output module | Digital |  | 4 inputs 4 outputs CPX-AP-I-4DI4DO <ul style="list-style-type: none">• LED indicator• PNP (positive switching)• Characteristic curve of inputs to IEC 61131-2, type 3• Characteristic curve of outputs to IEC 61131-2, type 0.5• Electrical connection M8x1, 3-pin• Electrical connection M12x1, 5-pin 69 |
| Electrical interface for valve terminal | Valve terminal VTUX |  | Maximum 32 valve positions VABX-A <ul style="list-style-type: none">• LED indicator• 1 valve size (10 mm)• 2x 3/2-way valves• 5/2-way valves• 5/3-way valve• Modular design• Flow rates of up to 670 l/min 76 |
| | Valve terminal VTUG |  | 12 or 24 valve positions VAEM-L1-S <ul style="list-style-type: none">• LED indicator• 3 valve sizes (10 mm, 14 mm and 18 mm)• 2x 3/2-way valves• 3/2-way valves• 5/2-way valves• 5/3-way valves• Fixed-grid links• 130 ... 1000 l/min flow rate 82 |
| | Valve terminal MPA-L |  | 32 valve positions VMPAL-EPL-AP <ul style="list-style-type: none">• LED indicator• 3 valve sizes (10 mm, 14 mm and 20 mm)• 2x 2/2-way valves• 2x 3/2-way valves• 3/2-way valves• 5/2-way valves• 5/3-way valves• Modular design• Flow rates of up to 870 l/min 87 |
| | Valve terminals VTSA |  | 12 valve positions VABA-S6-1-AP <ul style="list-style-type: none">• LED indicator• 4 valve sizes (18 mm, 26 mm, 42 mm and 52 mm)• 2x 2/2-way valves• 2x 3/2-way valves• 5/2-way valves• 5/3-way valves• Modular design• Flow rates of up to 2900 l/min vtsa |

Peripherals overview

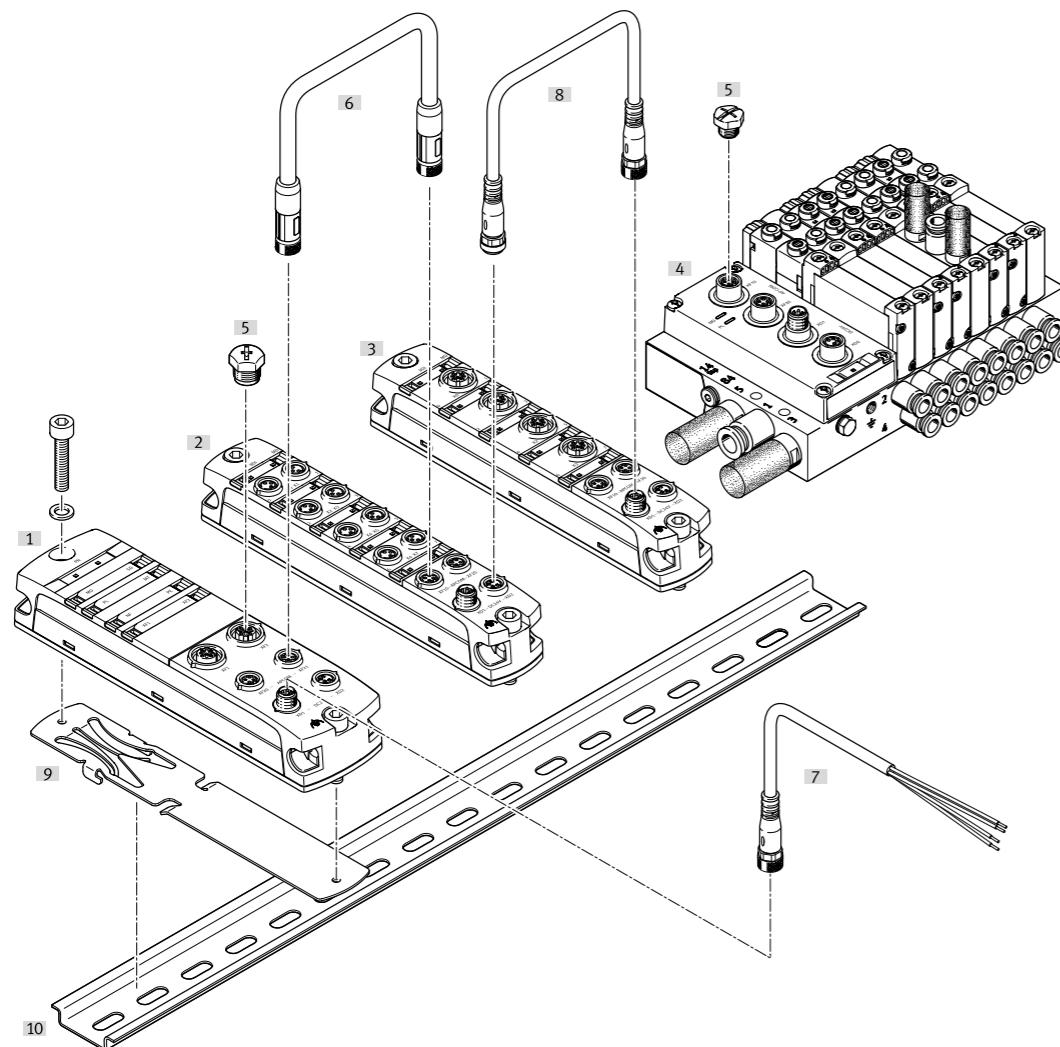


| | Type | Description | → Page/Internet |
|------|---|---|----------------------------|
| [1] | Bus interface | CPX-AP-I-PN-M12 CPX-AP-I-PB-M12 CPX-AP-I-EC-M12 CPX-AP-I-EP-M12 | 11 17 23 29 |
| [2] | Module with M8 connections | CPX-AP-I-4DI-M8-3P CPX-AP-I-8DI-M8-3P CPX-AP-I-8DO-M8-3P CPX-AP-I-4DI4DO-M8-3P | 41 47 61 69 |
| [3] | Module with M12 connections | CPX-AP-I-4IOL-M12 CPX-AP-I-8DI-M12-5P CPX-AP-I-4AI-U-I-RTD-M12 CPX-AP-I-8DO-M12-5P CPX-AP-I-4DI4DO-M12-5P | 35 47 55 61 69 |
| [4] | Electrical interface for valve terminal | VABX-A VAEM-L1-S VMPAL-EPL-AP VABA-S6-1-AP | 76 82 87 vtsa |
| [5] | Cover cap | ISK-M8 ISK-M12 | isk |
| [6] | Connecting cable | NEBC | nebc |
| [7] | Connecting cable | NEBL | nebl |
| [8] | Connecting cable | NEBL | nebl |
| [9] | DIN rail mounting | CAFМ | cafм |
| [10] | DIN mounting rail | NRH-35-2000 | nrh |

Key features – Mounting

Assembly


Wall mounting – modules

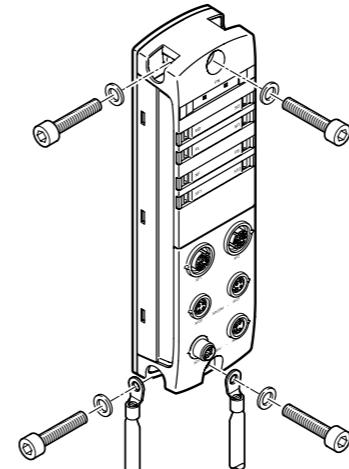

The modules can be mounted on flat surfaces in almost any position using the mounting holes provided (with screws up to 4 mm in diameter). Two screws with correctly sized washers (not included in the scope of delivery) are needed for secure mounting.

The mounting holes also include the earthing connection for the modules.

DIN rail mounting – Modules

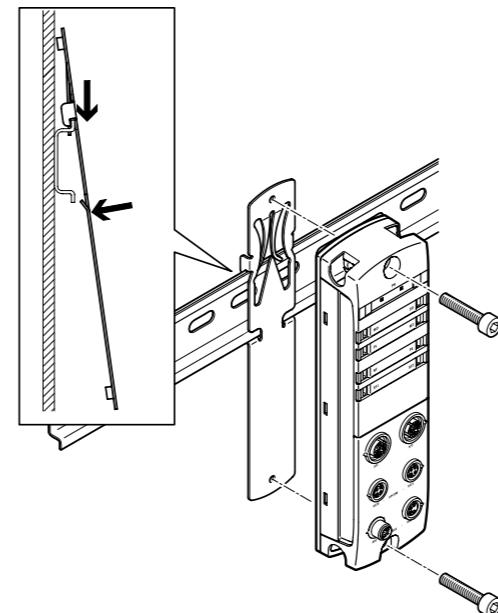


The modules can be mounted on DIN rails according to EN 60715 using the DIN rail mounting CAFM. Two screws with metric thread M4 and correctly sized washers (not included in the scope of delivery) are needed for securing mounting.

To do this, first hook the DIN rail fastening onto the rail, snap it into place and then screw the module onto the DIN rail fastening.

The mounting holes also include the earthing connection for the modules.

Mounting – Electrical interface

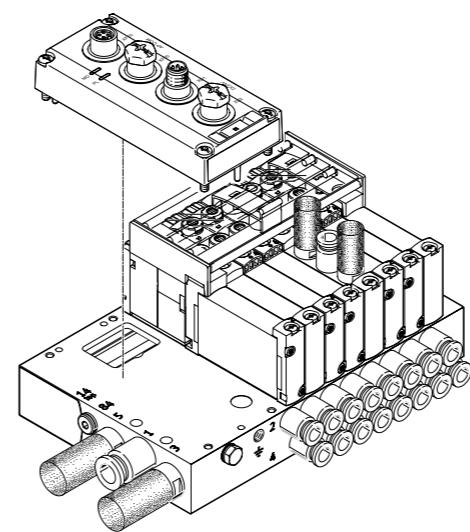


The electrical interfaces are mounted directly on the valve terminal.


The options for wall mounting or DIN rail mounting depend on the mounting options for the valve terminal in question.

Key features – Power supply

Labelling

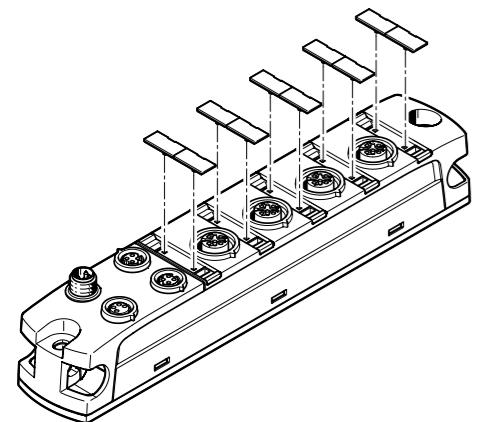

Power supply concept

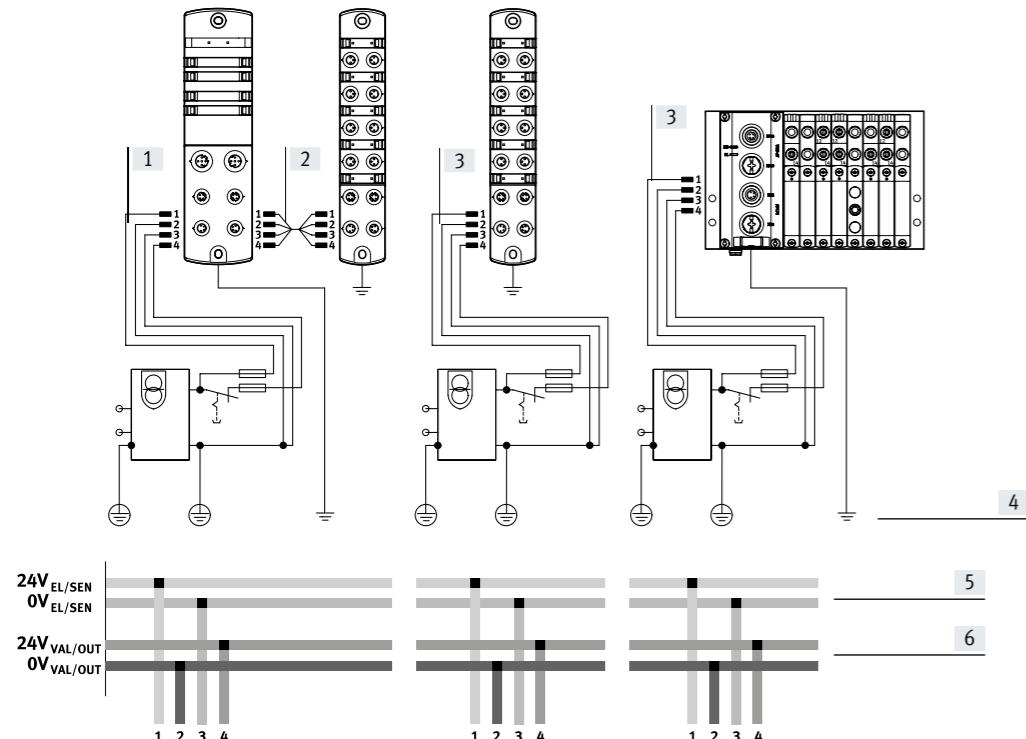

In principle, the remote I/O system CPX-AP-I has two separate electrical circuits:

- For the module electronics and the power supply for connected sensors
- For connected outputs and valves

At the same time, the remote I/O system allows each individual module to be separately supplied with power, or for the power supply to be transmitted from module to module. This creates electrically isolated, all-pole disconnectable potential groups/voltage segments.

All modules have the same connections for power supply, even when a module does not require all of these itself (e.g. an input module also has connections for outputs and valves).

All modules are supplied with the same, clip-on inscription labels. The inscription label is made up of two parts and can be divided into two smaller sections if required.

Labelling templates can be downloaded from the Support Portal:
→ Internet: CPX-AP-I
In the "Software" area.

Key features – Diagnostics

System performance

Diagnostics

Detailed diagnostic functions are needed in order to quickly locate the causes of errors in the electrical installation and therefore reduce downtimes in the production plant. A basic distinction is made between on-the-spot diagnostics using LEDs and diagnostics using a bus interface.


The remote I/O system CPX-AP-I supports on-the-spot diagnostics using LED indicators on each module. This is separate from the connection area and therefore provides an easy and good visual view of status and diagnostic information.

Module and channel-specific diagnostics are supported, for example:

- Undervoltage detection
- Short circuit detection

The diagnostic messages can be read out via the bus interface in the higher-order controller and visualised for the central recording and evaluation of error causes. This is done using the individual bus-specific channels.

Indicator lights

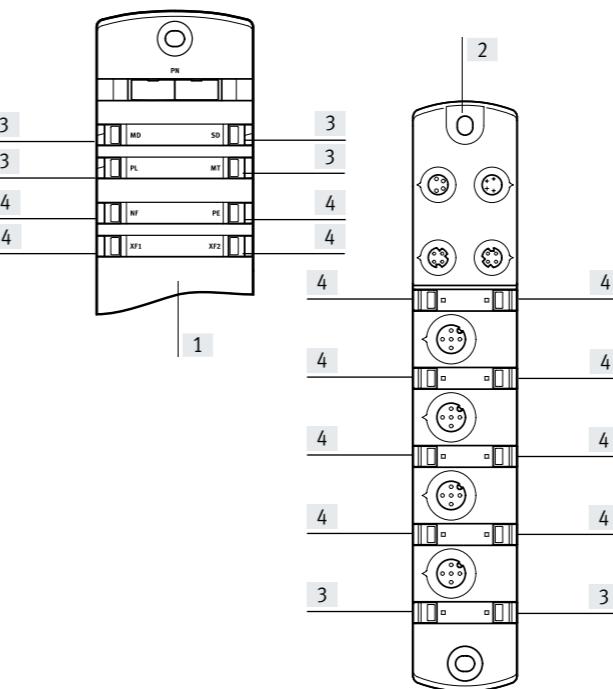

Each module has a row of LEDs for indicating the operating status of the module and of the connected sensors or actuators.

- [1] LED indicators on the bus interface
- [2] LED indicators on the input module, input/output module
- [3] System-specific LED indicator (e.g. power supply)
- [4] Communication-specific LED indicator (e.g. status of network connection, switching status of sensor)

Parameterisation

Various parameters are available for reading out information about the modules in the remote I/O system CPX-AP-I and for configuring the modules to the application.

The parameters are typically accessed via the higher-order controller.

Key features – Addressing

Addressing

The various modules of the CPX-AP-I occupy a different number of addresses within the CPX-AP-I system. The maximum address space for the bus interface depends on the performance of the fieldbus systems.

- Maximum system configuration: • 1 bus interface
- 80 input, output and/or input/output modules and/or electrical interfaces

The maximum system configuration can be limited in individual cases by exceeding the address space or limitations of the higher-order controller.

Addresses are allocated automatically. The bus interface is assigned the address "1", all other modules are assigned an address in increasing value from left to right, viewed from the bus interface. The modules of the first string (XF20) come first, then the modules of the second string (XF21).

Note

Please refer to the detailed description of the configuration/addressing rules in the technical data for the CPX-AP-I bus interface.

Overview – Address space for CPX-AP-I bus interface

| | Protocol | Max. total Inputs | Outputs |
|-----------------|-------------|----------------------|------------|
| CPX-AP-I-PN-M12 | PROFINET | 1024 bytes | 1024 bytes |
| CPX-AP-I-PB-M12 | PROFIBUS | 244 bytes | 244 bytes |
| CPX-AP-I-EC-M12 | EtherCAT® | 2048 bytes | 2048 bytes |
| CPX-AP-I-EP-M12 | EtherNet/IP | 1324 bytes | 1324 bytes |

Note

The bandwidth of the bus interface can be restricted by the choice of module and the maximum number of modules.

Overview – Allocated addresses for CPX-AP-I modules

| | | Inputs [bytes] | Outputs [bytes] |
|-----------------------------|---|----------------|-----------------|
| CPX-AP-I-4IOL-M12 | IO-Link master | 12 ... 132 | 8 ... 128 |
| CPX-AP-I-4DI-M8-3P | Digital input module, 4 inputs | 1 | – |
| CPX-AP-I-8DI-M8-3P | Digital input module, 8 inputs | 1 | – |
| CPX-AP-I-8DI-M12-5P | Digital input module, 8 inputs | 1 | – |
| CPX-AP-I-4AI-U-I-RTD-M12 | Analogue input module, 4 inputs | 8 | – |
| CPX-AP-I-8DO-M8-3P | Digital output module, 8 outputs | – | 1 |
| CPX-AP-I-8DO-M12-5P | Digital output module, 8 outputs | – | 1 |
| CPX-AP-I-4DI4DO-M8-3P | Digital input/output module, 4 inputs/4 outputs | 1 | 1 |
| CPX-AP-I-4DI4DO-M12-5P | Digital input/output module, 4 inputs/4 outputs | 1 | 1 |
| VABX-A-P-EL-E12-API-SHUU-XL | Pneumatic interface to valve terminal VTUX, parallel communication, maximum 32 solenoid coils | – | 4 |
| VABX-AS-EL-E12-API-SHUU-XL | Pneumatic interface to valve terminal VTUX, serial communication, maximum 128 solenoid coils | – | 4 |
| VAEM-L1-S-12-AP | Electrical interface to valve terminal VTUG, 12 valve positions | – | 3 |
| VAEM-L1-S-24-AP | Electrical interface to valve terminal VTUG, 24 valve positions | – | 6 |
| VMPAL-EPL-AP | Electrical interface to valve terminal MPA-L, 32 valve positions | – | 4 |


Example of CPX-AP-I-PN-M12 (PROFINET)

| | Inputs [bytes] | Outputs [bytes] | Remarks |
|----------------------------|----------------|-----------------|---|
| 26x CPX-AP-I-8DI-M8-3P | 26 | – | • The maximum number of modules is reached with 80 CPX-AP-I modules |
| 45x CPX-AP-I-4DI4DO-M12-5P | 45 | 45 | • The available address space (1024 bytes) is not fully used up |
| 6x VAEM-L1-S-12-AP | – | 18 | • No additional modules can be configured |
| 3x VAEM-L1-S-24-AP | – | 18 | |
| Assigned address space | 71 | 81 | |

Datasheet – PROFINET interface



Interface for operating the remote I/O system CPX-AP-I on PROFINET. Data is transferred on the basis of the Ethernet standard and TCP/IP technology for communication in an industrial environment.



Bus connection

Communication with a higher-order controller takes place via PROFINET with real-time protocol (real time RT or isochronous real time IRT).

The bus connection is provided via two equivalent D-coded M12 sockets which meet Ethernet requirements.

The integrated switch supports star and line topology and enables the network to be divided into segments.

General technical data – PROFINET interface

| | |
|--|---|
| Fieldbus interface, protocol | PROFINET RT PROFINET RT |
| Fieldbus interface, function | Bus connection incoming/outgoing |
| Fieldbus interface, transmission rate | 100 Mbps |
| Fieldbus interface, type | Ethernet |
| Fieldbus interface, type of connection | 2 x socket |
| Communication interface, protocol | AP |
| Communication interface, function | System communication: XF20 OUT / XF21 OUT |
| Communication interface, connection type | 2 x socket |
| Communication interface, connection technology | M8x1, D-coded to EN 61076-2-114 |
| Communication interface, number of pins/cores | 4 |
| Communication interface, shielding | Yes |

General data – PROFINET interface

| | |
|--|---|
| Configuration support | GSDML file |
| Max. number of modules | 80 |
| Max. address volume for outputs | 1,024 bytes |
| Max. address volume inputs | 1,024 bytes |
| Diagnostics via LED | Diagnostics per module Network errors Power supply, electronics/sensors Power supply load System diagnostics Maintenance required |
| Diagnostics via bus | APDD invalid Load switch-off Communication to AP module interrupted Electronics/sensors overvoltage Load overvoltage Electronics/sensors undervoltage Undervoltage load |
| Diagnostics via internal communication | Module error Output short circuit/overload Short circuit/overload in sensor supply Undervoltage in load supply |
| Max. cable length | 50 m system communication |
| Reverse polarity protection | Yes |

Datasheet – PROFINET interface

Technical data – Electrical – PROFINET interface

| | |
|---|--|
| Nominal operating voltage DC for electronics/sensors | 24 V |
| Nominal operating voltage DC load | 24 V |
| Permissible voltage fluctuations, electronics/sensors | ± 25% |
| Permissible voltage fluctuations, load | ± 25% |
| Note on the operating voltage | SELV/PELV power supply units required; note voltage drop |
| Power failure buffering | 10 ms |
| Max. power supply | 2 x 4 A (external fuse required) |
| Intrinsic current consumption at nominal operating voltage, electronics/sensors | Typical 80 mA |
| Intrinsic current consumption at nominal operating voltage, load | Typical 5 mA |
| Power supply, function | Incoming electronics/sensors and load |
| Power supply, connection type | Plug |
| Power supply, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power supply, number of pins/cores | 4 |
| Power transmission, function | Outgoing electronics/sensors and load |
| Power transmission, connection type | Socket |
| Power transmission, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power transmission, number of pins/cores | 4 |

Technical data – Mechanical – PROFINET interface

| | |
|----------------------|---|
| Type of mounting | On DIN rail with accessories; with through-hole |
| Product weight | 186 g |
| Dimensions W x L x H | 45 mm x 170 mm x 35 mm |

Materials – PROFINET interface

| | |
|------------------------|--|
| Housing material | PA; PC; nickel-plated die-cast zinc |
| O-ring material | FPM |
| Note on materials | RoHs-compliant |
| LABS (PWIS) conformity | VDMA24364-B2-L |
| Cleanroom class | Element installed statically, no meaningful evaluation possible according to ISO 14644-1 |


Operating and environmental conditions – PROFINET interface

| | |
|--|------------------------------|
| Ambient temperature | -20 ... 50 °C |
| Storage temperature | -40 ... 70 °C |
| Corrosion resistance class CRC ¹⁾ | 1 - Low corrosion stress |
| Relative humidity | 5 - 95%, non-condensing |
| CE marking (see declaration of conformity) ²⁾ | To EU EMC Directive |
| UKCA marking (see declaration of conformity) ³⁾ | To UK EMC regulations |
| KC marking | KC EMC |
| Certification | RCM c UL us - Listed (OL) |
| Certificate-issuing authority | UL E239998 |
| Degree of protection | IP65; IP67 |
| Note on degree of protection | Unused connections sealed |

¹⁾ More information www.festo.com/x/topic/crc²⁾ More information www.festo.com/catalogue/... Support/downloads.³⁾ More information www.festo.com/catalogue/... Support/downloads.

Datasheet – PROFINET interface

Connection and display components

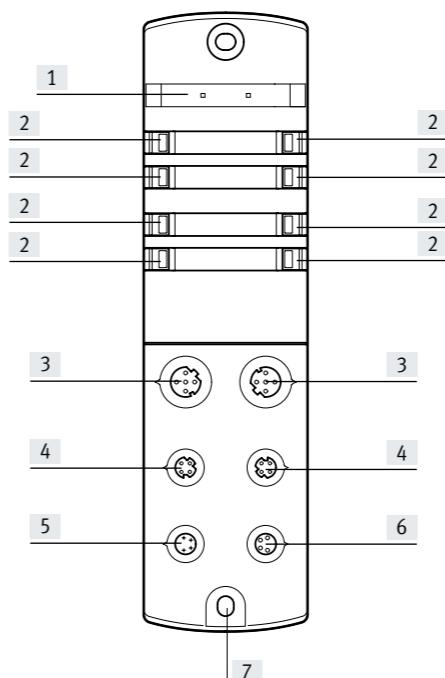

[1] Space for inscription label

[2] LED indicators

[3] Network connections 1 and 2, PROFINET


[4] Communication interface

[5] Electrical connection, power supply

[6] Electrical connection, power transmission

[7] Earth connection

Datasheet – PROFINET interface

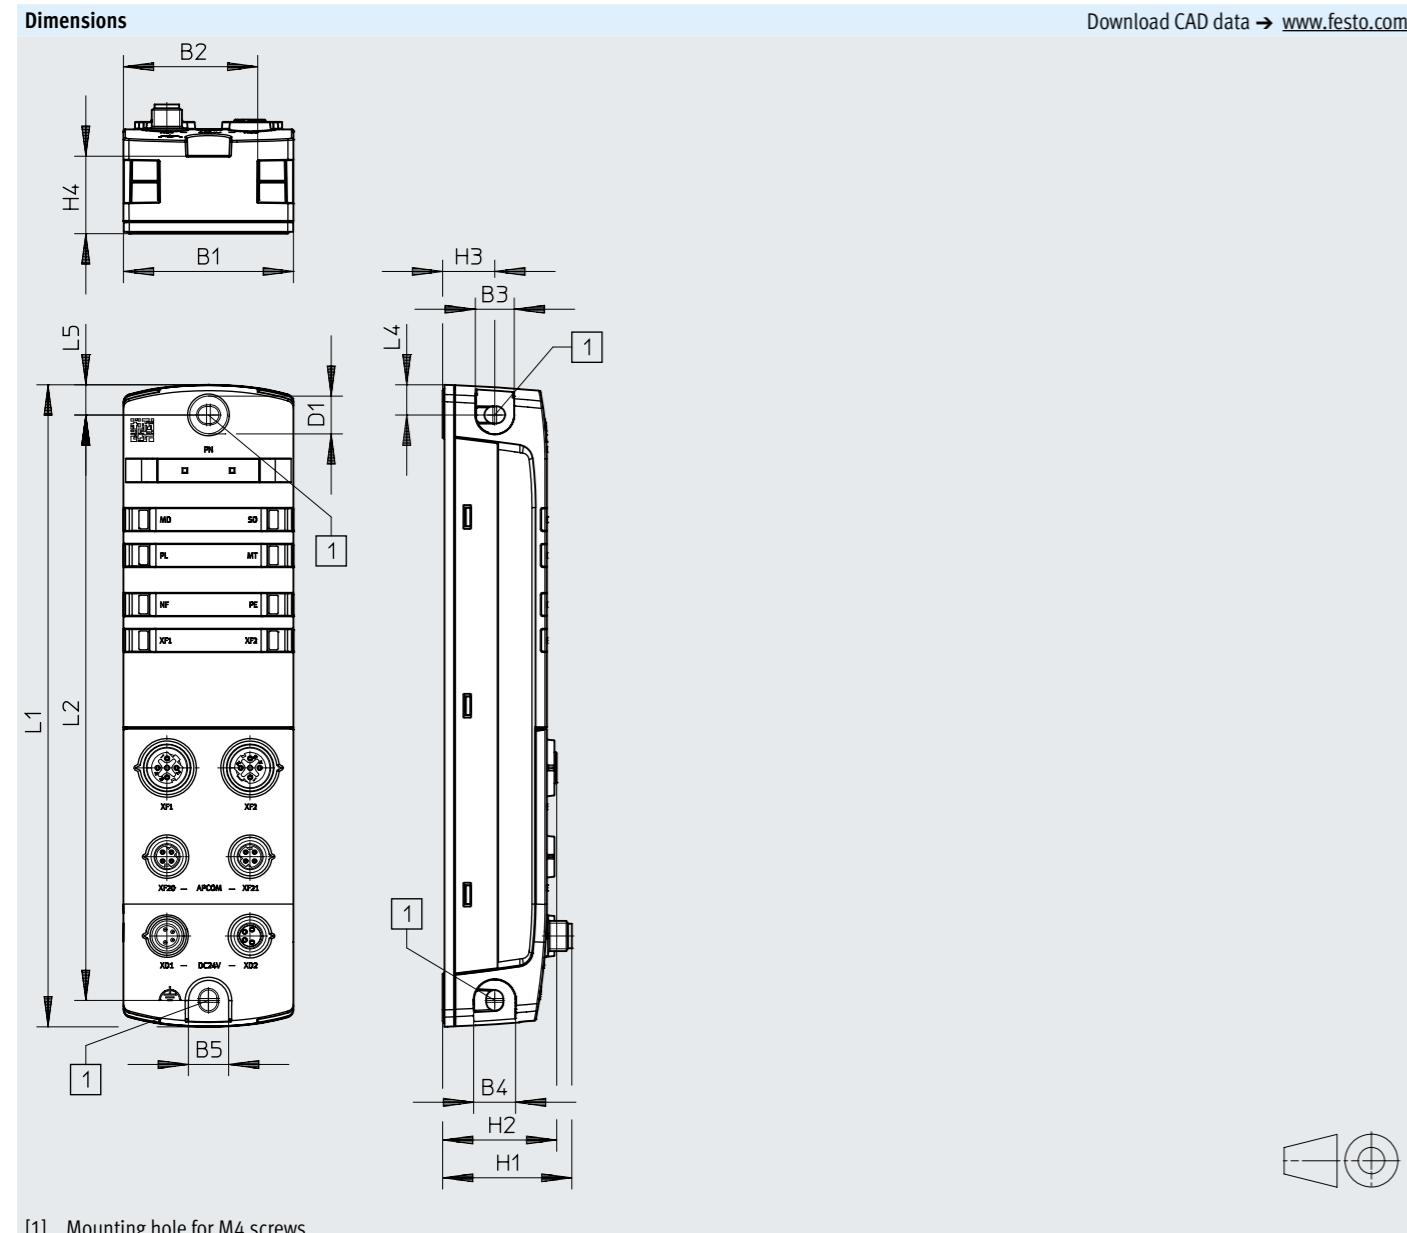

[1] Mounting hole for M4 screws

| | B1 | B2 | B3 | B4 | B5 | D1 ∅ | H1 | H2 | H3 | H4 | L1 | L2 | L3 | L4 | L5 |
|-----------------|----|------|----|----|----|---------|------|------|------|------|-----|-----|-----|----|----|
| CPX-AP-I-PN-M12 | 45 | 35.5 | 10 | 11 | 11 | 10 | 34.2 | 30.2 | 13.8 | 20.5 | 170 | 155 | 155 | 8 | 8 |

Datasheet – PROFINET interface

Ordering data

| | Part no. | Type |
|--------------------|----------|-----------------|
| PROFINET interface | 8086607 | CPX-AP-I-PN-M12 |

Ordering data – Accessories

| Description | Part no. | Type |
|--|----------|------------------------------|
| Plug connectors for self-assembly | | |
| For bus connection | 543109 | NECU-M-S-D12G4-C2-ET |
| Connecting cable | | |
| For communication interface | 8082902 | NEBC-D8G4-ES-0.3-N-S-D8G4-ET |
| For communication interface | 8065123 | NEBC-D8G4-ES-0.5-N-S-D8G4-ET |
| For communication interface | 8065125 | NEBC-D8G4-ES-1-N-S-D8G4-ET |
| For communication interface | 8065127 | NEBC-D8G4-ES-2-N-S-D8G4-ET |
| For communication interface | 8065129 | NEBC-D8G4-ES-5-N-S-D8G4-ET |
| For communication interface | 8065131 | NEBC-D8G4-ES-7.5-N-S-D8G4-ET |
| For communication interface | 8065133 | NEBC-D8G4-ES-10-N-S-D8G4-ET |
| For communication interface | 8065135 | NEBC-D8G4-ES-15-N-S-D8G4-ET |
| For communication interface | 8146031 | NEBC-D8G4-ES-20-N-S-D8G4-ET |
| For communication interface | 8146032 | NEBC-D8G4-ES-25-N-S-D8G4-ET |
| For communication interface | 8146033 | NEBC-D8G4-ES-30-N-S-D8G4-ET |
| For communication interface | 8146034 | NEBC-D8G4-ES-40-N-S-D8G4-ET |
| For communication interface | 8146035 | NEBC-D8G4-ES-50-N-S-D8G4-ET |
| For communication interface | 8065124 | NEBC-D8W4-ES-0.5-N-S-D8W4-ET |
| For communication interface | 8065126 | NEBC-D8W4-ES-1-N-S-D8W4-ET |
| For communication interface | 8065128 | NEBC-D8W4-ES-2-N-S-D8W4-ET |
| For communication interface | 8065130 | NEBC-D8W4-ES-5-N-S-D8W4-ET |
| For communication interface | 8065132 | NEBC-D8W4-ES-7.5-N-S-D8W4-ET |
| For communication interface | 8065134 | NEBC-D8W4-ES-10-N-S-D8W4-ET |
| For communication interface | 8065136 | NEBC-D8W4-ES-15-N-S-D8W4-ET |
| For communication interface | 8146036 | NEBC-D8W4-ES-20-N-S-D8W4-ET |
| For communication interface | 8146037 | NEBC-D8W4-ES-25-N-S-D8W4-ET |
| For communication interface | 8146038 | NEBC-D8W4-ES-30-N-S-D8W4-ET |
| For communication interface | 8146039 | NEBC-D8W4-ES-40-N-S-D8W4-ET |
| For communication interface | 8146040 | NEBC-D8W4-ES-50-N-S-D8W4-ET |


Datasheet – PROFINET interface

| Ordering data – Accessories | | | Description | Pack size | Part no. | Type |
|------------------------------------|--|--|-------------------------------------|--|--|--|
| Connecting cable | | | | | | |
| | For power supply | Straight socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 5.0 m 7.5 m 10.0 m 15.0 m | 8065110 8065113 8065117 8065121 | NEBL-M8G4-E-5-N-LE4 NEBL-M8G4-E-7.5-N-LE4 NEBL-M8G4-E-10-N-LE4 NEBL-M8G4-E-15-N-LE4 |
| | | Angled socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 7.5 m 10.0 m 15.0 m | 8065114 8065118 8065122 | NEBL-M8W4-E-7.5-N-LE4 NEBL-M8W4-E-10-N-LE4 NEBL-M8W4-E-15-N-LE4 |
| | For power transmission | Straight socket, M8x1, 4-pin, A-coded | Straight plug, M8x1, 4-pin, A-coded | 0.3 m 0.5 m 1.0 m 2.0 m 5.0 m 7.5 m 10.0 m 15.0 m | 8082904 8065102 8065104 8065106 8065108 8065111 8065115 8065119 | NEBL-M8G4-E-0.3-N-M8G4 NEBL-M8G4-E-0.5-N-M8G4 NEBL-M8G4-E-1-N-M8G4 NEBL-M8G4-E-2-N-M8G4 NEBL-M8G4-E-5-N-M8G4 NEBL-M8G4-E-7.5-N-M8G4 NEBL-M8G4-E-10-N-M8G4 NEBL-M8G4-E-15-N-M8G4 |
| | For power transmission | Angled socket, M8x1, 4-pin, A-coded | Angled plug, M8x1, 4-pin, A-coded | 0.3 m 0.5 m 1.0 m 2.0 m 5.0 m 7.5 m 10.0 m 15.0 m | 8146577 8065103 8065105 8065107 8065109 8065112 8065116 8065120 | NEBL-M8W4-E-0.3-N-M8W4 NEBL-M8W4-E-0.5-N-M8W4 NEBL-M8W4-E-1-N-M8W4 NEBL-M8W4-E-2-N-M8W4 NEBL-M8W4-E-5-N-M8W4 NEBL-M8W4-E-7.5-N-M8W4 NEBL-M8W4-E-10-N-M8W4 NEBL-M8W4-E-15-N-M8W4 |
| Ordering data – Accessories | | | | | | |
| | For modules CPX-AP-I | Size 6x 12.5 mm, 10 frames with 24 pieces each | 240 | 8087174 | ASLR-L-X4-612-P240 | |
| | For sealing unused connections | For connection M8x1 | 10 | 177672 | ISK-M8 | |
| | For mounting a module on DIN rails according to EN 60715 | - | 8095158 | CAF-M-X4-H | | |

Datasheet – PROFIBUS interface



Interface for operating the remote I/O system CPX-AP-I in a PROFIBUS-DP network. PROFIBUS is designed for fast, time-critical and complex communications tasks and is incorporated into the international standards IEC 61158 and IEC 61784.

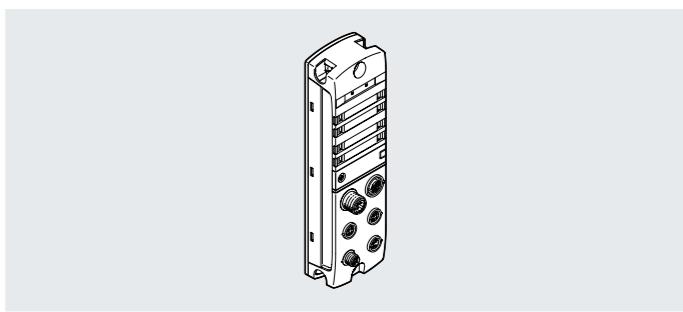

Bus connection

The bus connection is provided by two network connections PROFIBUS DP-IN (M12 plug) and PROFIBUS DP-OUT (M12 socket).

The network can be divided and enlarged using additional repeaters.

This makes it possible to structure the network and implement greater network expansions.

General technical data – PROFIBUS interface

| | |
|--|--|
| Fieldbus interface, protocol | PROFIBUS DP-V1 |
| Fieldbus interface, function | Incoming bus connection |
| Fieldbus interface, transmission rate | 1.5 Mbit/s; 12 Mbit/s; 187.5 kbit/s; 19.2 kbit/s; 3 Mbit/s; 500 kbit/s; 6 Mbit/s; 9.6 kbit/s; 93.75 kbit/s |
| Fieldbus interface, type of connection | Plug |
| Fieldbus interface, number of pins/cores | 5 |
| Fieldbus interface, galvanic isolation | Yes |
| Fieldbus interface 2, protocol | PROFIBUS DP-V1 |
| Fieldbus interface 2, function | Outgoing bus connection |
| Fieldbus interface 2, transmission rate | 1.5 Mbit/s; 12 Mbit/s; 187.5 kbit/s; 19.2 kbit/s; 3 Mbit/s; 500 kbit/s; 6 Mbit/s; 9.6 kbit/s; 93.75 kbit/s |
| Fieldbus interface 2, type | PROFIBUS |
| Fieldbus interface 2, type of connection | Socket |
| Fieldbus interface 2, connection technology | M12x1, B-coded to EN 61076-2-101 |
| Fieldbus interface 2, number of pins/cores | 5 |
| Fieldbus interface 2, galvanic isolation | Yes |
| Note on fieldbus interface | Terminating resistor at socket possible |
| Communication interface, protocol | AP |
| Communication interface, function | System communication: XF20 OUT / XF21 OUT |
| Communication interface, connection technology | M8x1, D-coded to EN 61076-2-114 |
| Communication interface, number of pins/cores | 4 |
| Communication interface, shielding | Yes |

Datasheet – PROFIBUS interface

General data – PROFIBUS interface

| | |
|--|---|
| Configuration support | GSD file |
| Max. number of modules | 56 |
| Max. address volume for outputs | 244 bytes |
| Max. address volume inputs | 244 bytes |
| Diagnostics via LED | Buffer error LED (BF) Diagnostics per module Power supply, electronics/sensors Power supply load System diagnostics Maintenance required |
| Diagnostics via bus | APDD invalid Load switch-off Communication to AP module interrupted Electronics/sensors overvoltage Load overvoltage Electronics/sensors undervoltage Undervoltage load |
| Diagnostics via internal communication | – |
| Max. cable length | 50 m system communication |
| Reverse polarity protection | Yes |

Technical data – Electrical PROFIBUS interface

| | |
|---|--|
| Nominal operating voltage DC for electronics/sensors | 24 V |
| Nominal operating voltage DC load | 24 V |
| Permissible voltage fluctuations, electronics/sensors | ± 25% |
| Permissible voltage fluctuations, load | ± 25% |
| Note on the operating voltage | SELV/PELV power supply units required; note voltage drop |
| Power failure buffering | 10 ms |
| Max. power supply | 2 x 4 A (external fuse required) |
| Intrinsic current consumption at nominal operating voltage, electronics/sensors | Typical 80 mA |
| Intrinsic current consumption at nominal operating voltage, load | Typical 5 mA |
| Power supply, function | Incoming electronics/sensors and load |
| Power supply, connection type | Plug |
| Power supply, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power supply, number of pins/cores | 4 |
| Power transmission, function | Outgoing electronics/sensors and load |
| Power transmission, connection type | Socket |
| Power transmission, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power transmission, number of pins/cores | 4 |

Technical data – Mechanical PROFIBUS interface

| | |
|----------------------|---|
| Type of mounting | On DIN rail with accessories; with through-hole |
| Dimensions W x L x H | 45 mm x 170 mm x 35 mm |
| Product weight | 186 g |

Materials PROFIBUS Interface

| | |
|------------------------|--|
| Housing material | PA; PC; nickel-plated die-cast zinc |
| O-ring material | FPM |
| Note on materials | RoHs-compliant |
| LABS (PWIS) conformity | VDMA24364-B2-L |
| Cleanroom class | Element installed statically, no meaningful evaluation possible according to ISO 14644-1 |


Datasheet – PROFIBUS interface

Operating and ambient conditions – PROFIBUS interface

| | |
|--|------------------------------|
| Ambient temperature | -20 ... 50 °C |
| Storage temperature | -40 ... 70 °C |
| Corrosion resistance class CRC ¹⁾ | 1 - Low corrosion stress |
| Relative humidity | 5 - 95%, non-condensing |
| CE marking (see declaration of conformity) ²⁾ | To EU EMC Directive |
| UKCA marking (see declaration of conformity) ³⁾ | To UK EMC regulations |
| KC marking | KC EMC |
| Certification | RCM c UL us - Listed (OL) |
| Certificate-issuing authority | UL E23998 |
| Degree of protection | IP65; IP67 |
| Note on degree of protection | Unused connections sealed |


¹⁾ More information www.festo.com/x/topic/crc²⁾ More information www.festo.com/catalogue/... Support/downloads.³⁾ More information www.festo.com/catalogue/... Support/downloads.

Connection and display components

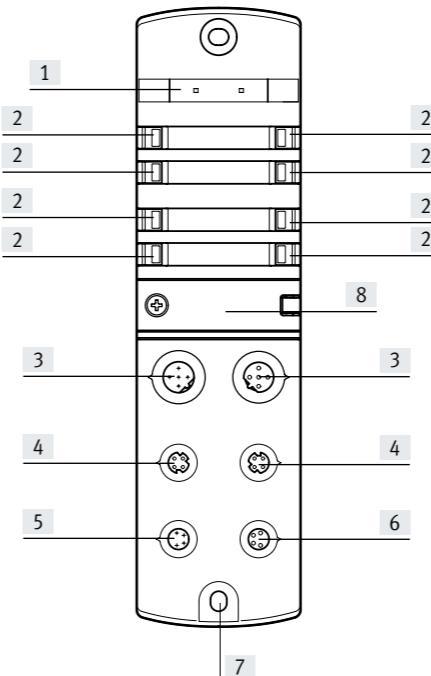

- [1] Space for inscription label
- [2] LED indicators
- [3] Network connections 1 and 2, PROFIBUS
- [4] Communication interface
- [5] Electrical connection, power supply
- [6] Electrical connection, power transmission
- [7] Earth connection
- [8] DIL switch

Datasheet – PROFIBUS interface

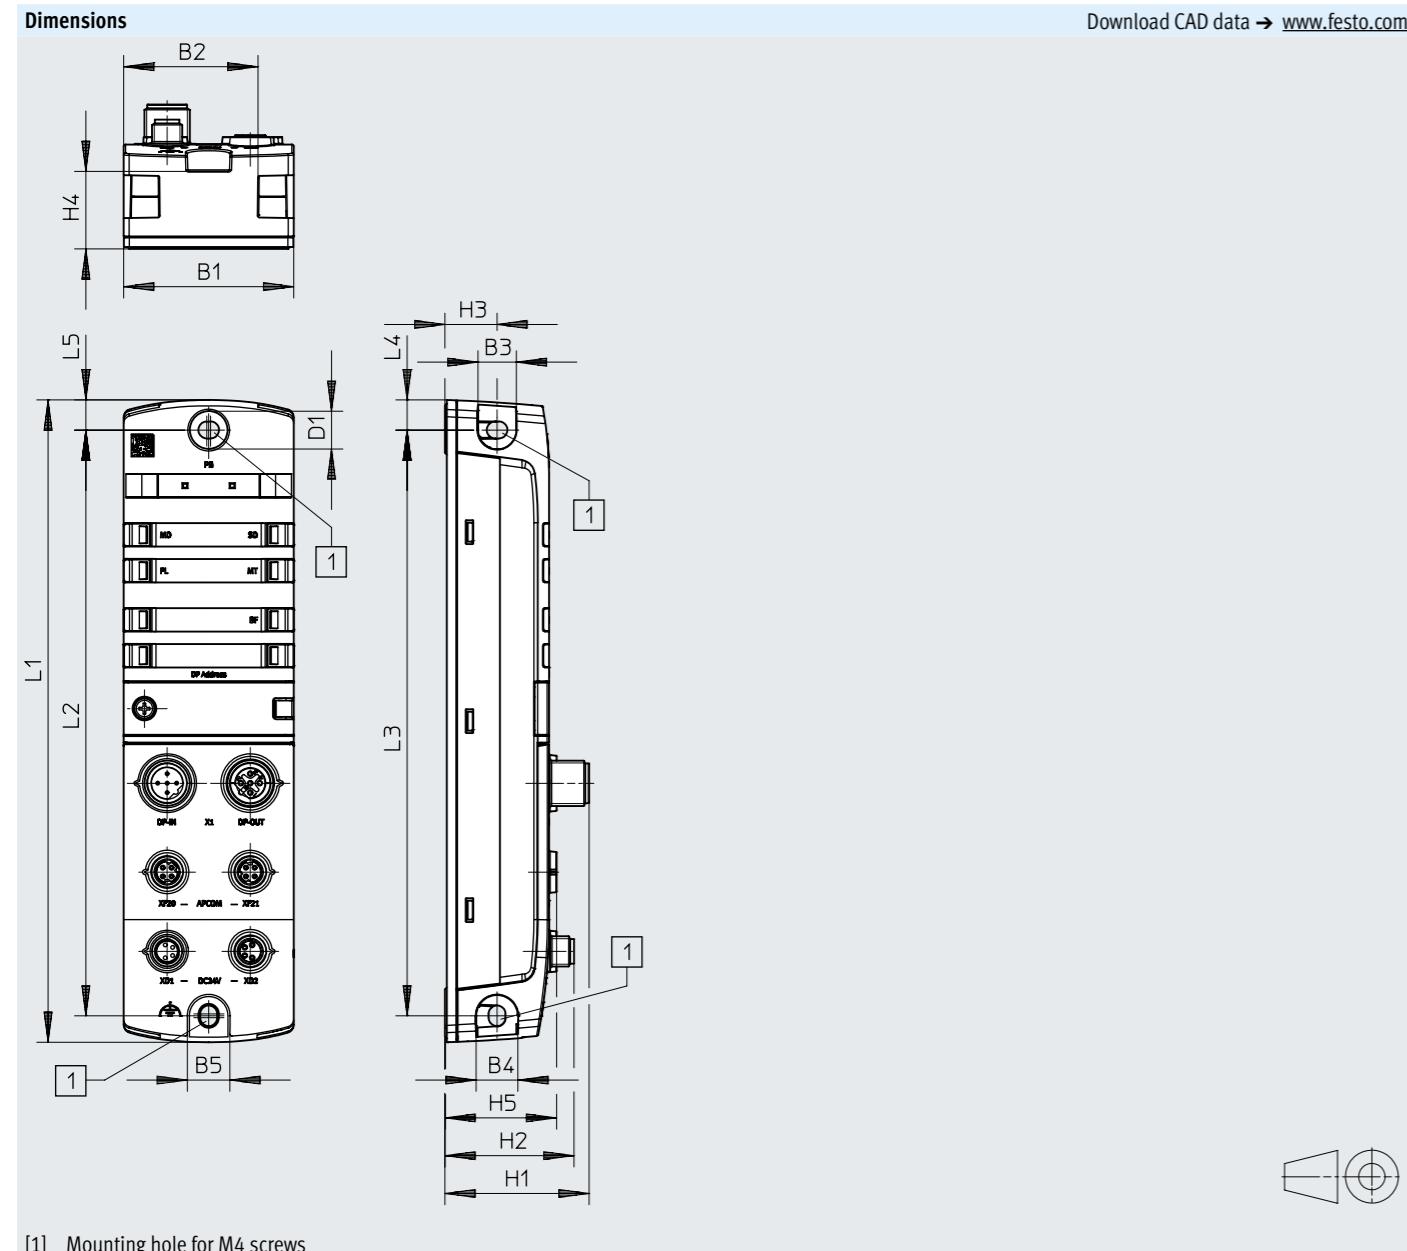

Datasheet – PROFIBUS interface

| Ordering data | | Part no. | Type |
|--------------------------------------|--|----------|--------------------------------------|
| PROFIBUS interface | | 8086608 | CPX-AP-I-PB-M12 |
| Ordering data – Accessories | | Part no. | Type |
| Plug connectors for self-assembly | | Part no. | Type |
| For bus connection | | 1067905 | NECU-M-B12G5-C2-PB |
| Straight plug, M12x1, 5-pin, B-coded | | 1066354 | NECU-M-S-B12G5-C2-PB |
| Connecting cable | | Part no. | Type |
| For communication interface | | 8082902 | NEBC-D8G4-ES-0.3-N-S-D8G4-ET |
| Straight plug, M8x1, 4-pin, D-coded | | 0.5 m | 8065123 NEBC-D8G4-ES-0.5-N-S-D8G4-ET |
| | | 1.0 m | 8065125 NEBC-D8G4-ES-1-N-S-D8G4-ET |
| | | 2.0 m | 8065127 NEBC-D8G4-ES-2-N-S-D8G4-ET |
| | | 5.0 m | 8065129 NEBC-D8G4-ES-5-N-S-D8G4-ET |
| | | 7.5 m | 8065131 NEBC-D8G4-ES-7.5-N-S-D8G4-ET |
| | | 10.0 m | 8065133 NEBC-D8G4-ES-10-N-S-D8G4-ET |
| | | 15.0 m | 8065135 NEBC-D8G4-ES-15-N-S-D8G4-ET |
| | | 20.0 m | 8146031 NEBC-D8G4-ES-20-N-S-D8G4-ET |
| | | 25.0 m | 8146032 NEBC-D8G4-ES-25-N-S-D8G4-ET |
| | | 30.0 m | 8146033 NEBC-D8G4-ES-30-N-S-D8G4-ET |
| | | 40.0 m | 8146034 NEBC-D8G4-ES-40-N-S-D8G4-ET |
| | | 50.0 m | 8146035 NEBC-D8G4-ES-50-N-S-D8G4-ET |
| Angled plug, M8x1, 4-pin, D-coded | | 8065124 | NEBC-D8W4-ES-0.5-N-S-D8W4-ET |
| | | 0.5 m | 8065126 NEBC-D8W4-ES-1-N-S-D8W4-ET |
| | | 1.0 m | 8065128 NEBC-D8W4-ES-2-N-S-D8W4-ET |
| | | 5.0 m | 8065130 NEBC-D8W4-ES-5-N-S-D8W4-ET |
| | | 7.5 m | 8065132 NEBC-D8W4-ES-7.5-N-S-D8W4-ET |
| | | 10.0 m | 8065134 NEBC-D8W4-ES-10-N-S-D8W4-ET |
| | | 15.0 m | 8065136 NEBC-D8W4-ES-15-N-S-D8W4-ET |
| | | 20.0 m | 8146036 NEBC-D8W4-ES-20-N-S-D8W4-ET |
| | | 25.0 m | 8146037 NEBC-D8W4-ES-25-N-S-D8W4-ET |
| | | 30.0 m | 8146038 NEBC-D8W4-ES-30-N-S-D8W4-ET |
| | | 40.0 m | 8146039 NEBC-D8W4-ES-40-N-S-D8W4-ET |
| | | 50.0 m | 8146040 NEBC-D8W4-ES-50-N-S-D8W4-ET |

Datasheet – PROFIBUS interface


| Ordering data – Accessories | | | | Description | | | Part no. | Type |
|-----------------------------|------------------------|---------------------------------------|-------------------------------------|-------------|---------|------------------------|----------|------|
| Connecting cable | | | | | | | | |
| | For power supply | Straight socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 5.0 m | 8065110 | NEBL-M8G4-E-5-N-LE4 | | |
| | | | | 7.5 m | 8065113 | NEBL-M8G4-E-7.5-N-LE4 | | |
| | | | | 10.0 m | 8065117 | NEBL-M8G4-E-10-N-LE4 | | |
| | | | | 15.0 m | 8065121 | NEBL-M8G4-E-15-N-LE4 | | |
| | | Angled socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 7.5 m | 8065114 | NEBL-M8W4-E-7.5-N-LE4 | | |
| | | | | 10.0 m | 8065118 | NEBL-M8W4-E-10-N-LE4 | | |
| | | | | 15.0 m | 8065122 | NEBL-M8W4-E-15-N-LE4 | | |
| | For power transmission | Straight socket, M8x1, 4-pin, A-coded | Straight plug, M8x1, 4-pin, A-coded | 0.3 m | 8082904 | NEBL-M8G4-E-0.3-N-M8G4 | | |
| | | | | 0.5 m | 8065102 | NEBL-M8G4-E-0.5-N-M8G4 | | |
| | | | | 1.0 m | 8065104 | NEBL-M8G4-E-1-N-M8G4 | | |
| | | | | 2.0 m | 8065106 | NEBL-M8G4-E-2-N-M8G4 | | |
| | | | | 5.0 m | 8065108 | NEBL-M8G4-E-5-N-M8G4 | | |
| | | | | 7.5 m | 8065111 | NEBL-M8G4-E-7.5-N-M8G4 | | |
| | | | | 10.0 m | 8065115 | NEBL-M8G4-E-10-N-M8G4 | | |
| | | | | 15.0 m | 8065119 | NEBL-M8G4-E-15-N-M8G4 | | |
| | | Angled socket, M8x1, 4-pin, A-coded | Angled plug, M8x1, 4-pin, A-coded | 0.3 m | 8146577 | NEBL-M8W4-E-0.3-N-M8W4 | | |
| | | | | 0.5 m | 8065103 | NEBL-M8W4-E-0.5-N-M8W4 | | |
| | | | | 1.0 m | 8065105 | NEBL-M8W4-E-1-N-M8W4 | | |
| | | | | 2.0 m | 8065107 | NEBL-M8W4-E-2-N-M8W4 | | |
| | | | | 5.0 m | 8065109 | NEBL-M8W4-E-5-N-M8W4 | | |
| | | | | 7.5 m | 8065112 | NEBL-M8W4-E-7.5-N-M8W4 | | |
| | | | | 10.0 m | 8065116 | NEBL-M8W4-E-10-N-M8W4 | | |
| | | | | 15.0 m | 8065120 | NEBL-M8W4-E-15-N-M8W4 | | |

| Ordering data – Accessories | | | | | |
|-----------------------------|--|--|-----------|----------|--------------------|
| Description | | | Pack size | Part no. | Type |
| Inscription labels | | | | | |
| | For modules CPX-AP-I | Size 6x 12.5 mm, 10 frames with 24 pieces each | 240 | 8087174 | ASLR-L-X4-612-P240 |
| Cover cap | | | | | |
| | For sealing unused connections | For connection M8x1 | 10 | 177672 | ISK-M8 |
| DIN rail mounting | | | | | |
| | For mounting a module on DIN rails according to EN 60715 | | - | 8095158 | CAF-M-X4-H |

Datasheet – EtherCAT® interface



Interface for operating the remote I/O system CPX-AP-I on EtherCAT®. Data is transferred on the basis of the Ethernet standard for communication in an industrial environment.

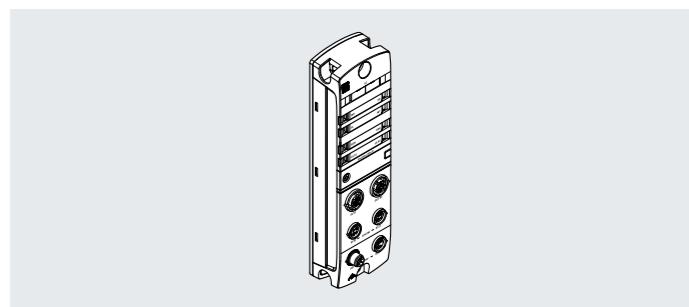

General technical data – EtherCAT® interface

| | |
|--|---|
| Fieldbus interface, protocol | EtherCAT® |
| Fieldbus interface, function | Bus connection incoming/outgoing |
| Fieldbus interface, transmission rate | 100 Mbps |
| Fieldbus interface, type | Ethernet |
| Fieldbus interface, type of connection | 2 x socket |
| Fieldbus interface, connection technology | M12x1, D-coded to EN 61076-2-101 |
| Fieldbus interface, number of pins/cores | 4 |
| Fieldbus interface, galvanic isolation | Yes |
| Communication interface, protocol | AP |
| Communication interface, function | System communication: XF20 OUT / XF21 OUT |
| Communication interface, connection type | 2 x socket |
| Communication interface, connection technology | M8x1, D-coded to EN 61076-2-114 |
| Communication interface, number of pins/cores | 4 |
| Communication interface, shielding | Yes |

General data – EtherCAT® interface

| | |
|--|---|
| Configuration support | ESI file |
| Max. number of modules | 80 |
| Max. address volume for outputs | 2,048 |
| Max. address volume inputs | 2,048 |
| Diagnostics via LED | Diagnostics per module EtherCAT RUN Power supply, electronics/sensors Power supply load System diagnostics Maintenance required |
| Diagnostics via bus | APDD invalid Load switch-off Communication to AP module interrupted Electronics/sensors overvoltage Load overvoltage Electronics/sensors undervoltage Undervoltage load |
| Diagnostics via internal communication | Module error Output short circuit/overload Short circuit/overload in sensor supply Undervoltage in load supply |
| Max. cable length | 50 m system communication |
| Note on max. cable length | Power supply according to nominal voltage |
| Reverse polarity protection | Yes |

Datasheet – EtherCAT® interface

Technical data – Electrical – EtherCAT® interface

| | |
|---|--|
| Nominal operating voltage DC for electronics/sensors | 24 V |
| Nominal operating voltage DC load | 24 V |
| Permissible voltage fluctuations, electronics/sensors | ± 25% |
| Permissible voltage fluctuations, load | ± 25% |
| Note on the operating voltage | SELV/PELV power supply units required; note voltage drop |
| Power failure buffering | 10 ms |
| Max. power supply | 2 x 4 A (external fuse required) |
| Intrinsic current consumption at nominal operating voltage, electronics/sensors | Typical 90 mA |
| Intrinsic current consumption at nominal operating voltage, load | Typical 5 mA |
| Power supply, function | Incoming electronics/sensors and load |
| Power supply, connection type | Plug |
| Power supply, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power supply, number of pins/cores | 4 |
| Power transmission, function | Outgoing electronics/sensors and load |
| Power transmission, connection type | Socket |
| Power transmission, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power transmission, number of pins/cores | 4 |

Materials – EtherCAT® Interface

| | |
|------------------------|--|
| Housing material | PA; PC; nickel-plated die-cast zinc |
| O-ring material | FPM |
| Note on materials | RoHS-compliant |
| LABS (PWIS) conformity | VDMA24364-B2-L |
| Cleanroom class | Element installed statically, no meaningful evaluation possible according to ISO 14644-1 |


Operating and environmental conditions – EtherCAT® interface

| | |
|--|------------------------------|
| Ambient temperature | -20 ... 50 °C |
| Storage temperature | -40 ... 70 °C |
| Corrosion resistance class CRC ¹⁾ | 1 - Low corrosion stress |
| Relative humidity | 5 - 95%, non-condensing |
| CE marking (see declaration of conformity) ²⁾ | To EU EMC Directive |
| UKCA marking (see declaration of conformity) ³⁾ | To UK EMC regulations |
| KC marking | KC EMC |
| Certification | RCM c UL us - Listed (OL) |
| Certificate-issuing authority | UL E239998 |
| Degree of protection | IP65; IP67 |
| Note on degree of protection | Unused connections sealed |

¹⁾ More information www.festo.com/x/topic/crc²⁾ More information www.festo.com/catalogue/... Support/downloads.³⁾ More information www.festo.com/catalogue/... Support/downloads.


Datasheet – EtherCAT® interface

Connection and display components

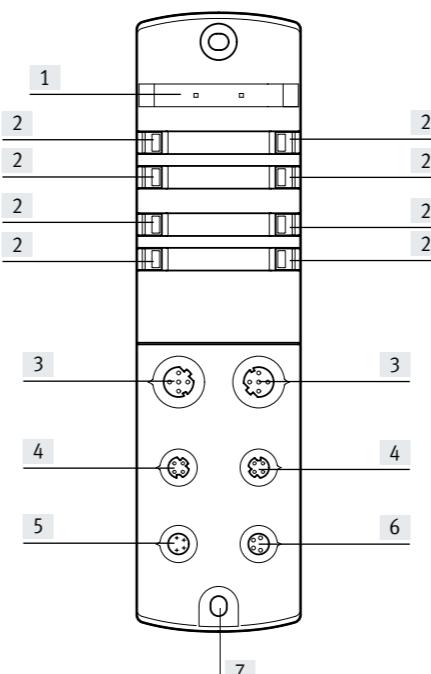

- [1] Space for inscription label
- [2] LED indicators
- [3] Network connections 1 and 2, EtherCAT
- [4] Communication interface
- [5] Electrical connection, power supply
- [6] Electrical connection, power transmission
- [7] Earth connection

Datasheet – EtherCAT® interface

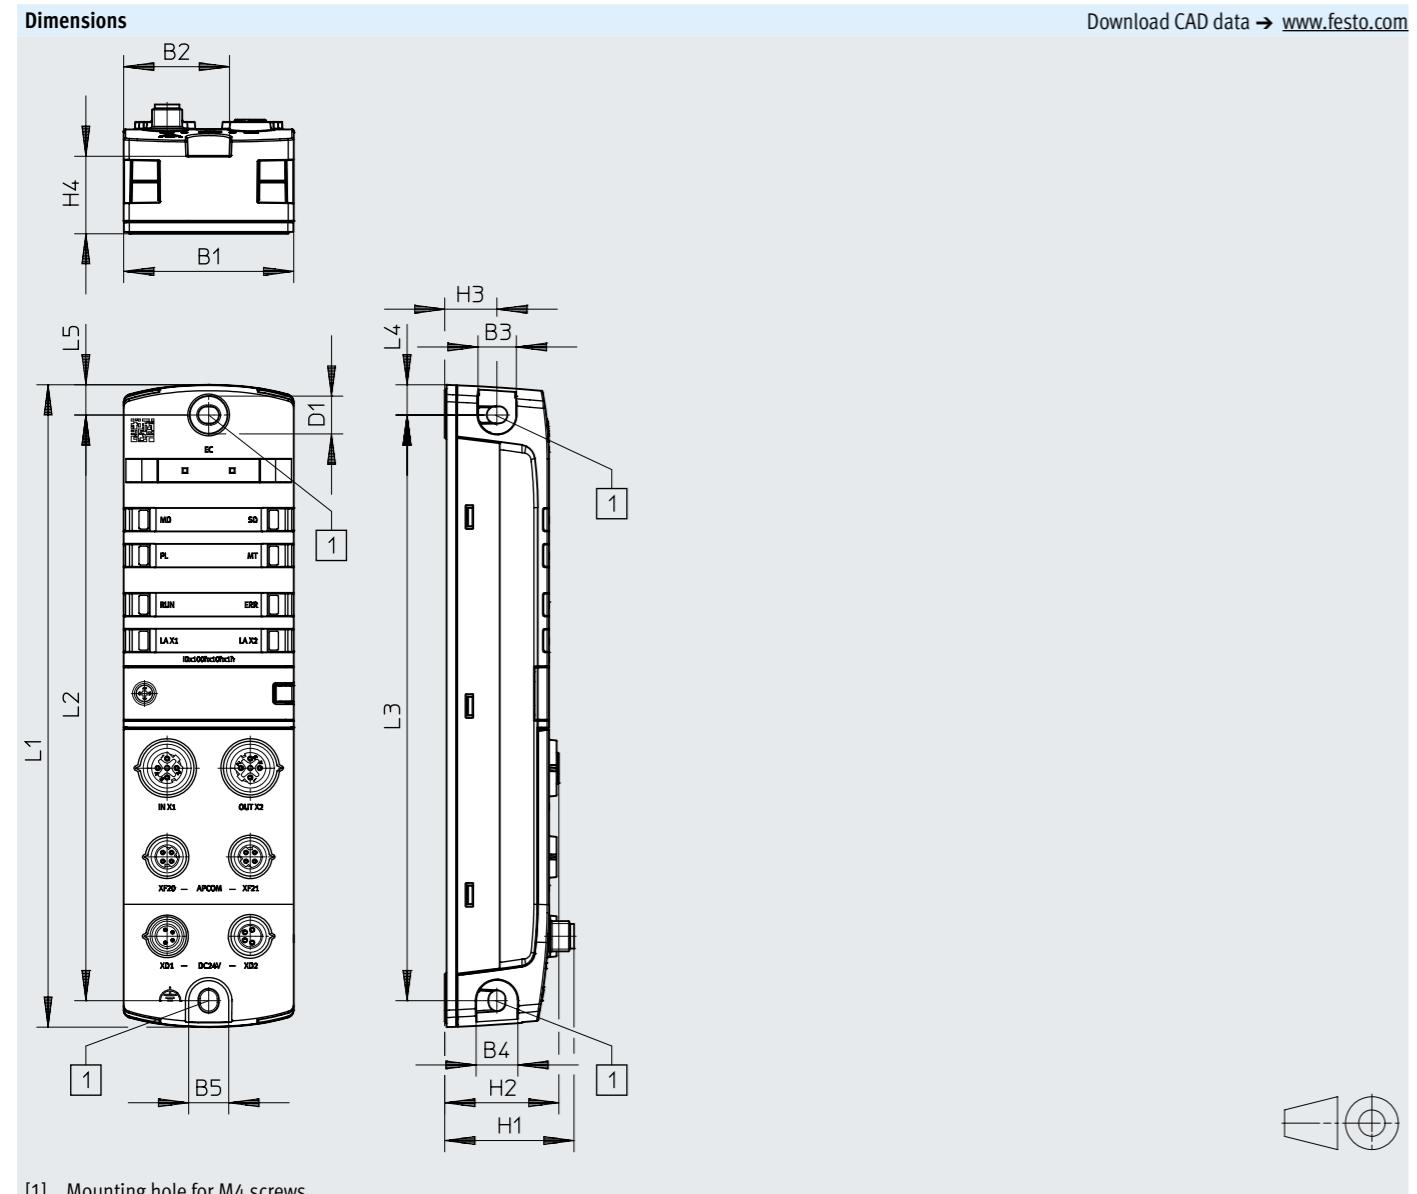

Datasheet – EtherCAT® interface

Ordering data

| | Part no. | Type |
|---------------------|----------|-----------------|
| EtherCAT® interface | 808609 | CPX-AP-I-EC-M12 |


Ordering data – Accessories



| Description | Part no. | Type |
|-----------------------------------|----------|----------------------|
| Plug connectors for self-assembly | 543109 | NECU-M-S-D12G4-C2-ET |

Connecting cable

| For bus connection | Straight plug, M12x1, 4-pin, D-coded | For communication interface | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 0.3 m | 8082902 | NEBC-D8G4-ES-0.3-N-S-D8G4-ET |
|--------------------|--------------------------------------|-----------------------------|-------------------------------------|-------------------------------------|--------|---------|------------------------------|
| | | | | | 0.5 m | 8065123 | NEBC-D8G4-ES-0.5-N-S-D8G4-ET |
| | | | | | 1.0 m | 8065125 | NEBC-D8G4-ES-1-N-S-D8G4-ET |
| | | | | | 2.0 m | 8065127 | NEBC-D8G4-ES-2-N-S-D8G4-ET |
| | | | | | 5.0 m | 8065129 | NEBC-D8G4-ES-5-N-S-D8G4-ET |
| | | | | | 7.5 m | 8065131 | NEBC-D8G4-ES-7.5-N-S-D8G4-ET |
| | | | | | 10.0 m | 8065133 | NEBC-D8G4-ES-10-N-S-D8G4-ET |
| | | | | | 15.0 m | 8065135 | NEBC-D8G4-ES-15-N-S-D8G4-ET |
| | | | | | 20.0 m | 8146031 | NEBC-D8G4-ES-20-N-S-D8G4-ET |
| | | | | | 25.0 m | 8146032 | NEBC-D8G4-ES-25-N-S-D8G4-ET |
| | | | | | 30.0 m | 8146033 | NEBC-D8G4-ES-30-N-S-D8G4-ET |
| | | | | | 40.0 m | 8146034 | NEBC-D8G4-ES-40-N-S-D8G4-ET |
| | | | | | 50.0 m | 8146035 | NEBC-D8G4-ES-50-N-S-D8G4-ET |
| | | | | | 0.5 m | 8065124 | NEBC-D8W4-ES-0.5-N-S-D8W4-ET |
| | | | | | 1.0 m | 8065126 | NEBC-D8W4-ES-1-N-S-D8W4-ET |
| | | | | | 2.0 m | 8065128 | NEBC-D8W4-ES-2-N-S-D8W4-ET |
| | | | | | 5.0 m | 8065130 | NEBC-D8W4-ES-5-N-S-D8W4-ET |
| | | | | | 7.5 m | 8065132 | NEBC-D8W4-ES-7.5-N-S-D8W4-ET |
| | | | | | 10.0 m | 8065134 | NEBC-D8W4-ES-10-N-S-D8W4-ET |
| | | | | | 15.0 m | 8065136 | NEBC-D8W4-ES-15-N-S-D8W4-ET |
| | | | | | 20.0 m | 8146036 | NEBC-D8W4-ES-20-N-S-D8W4-ET |
| | | | | | 25.0 m | 8146037 | NEBC-D8W4-ES-25-N-S-D8W4-ET |
| | | | | | 30.0 m | 8146038 | NEBC-D8W4-ES-30-N-S-D8W4-ET |
| | | | | | 40.0 m | 8146039 | NEBC-D8W4-ES-40-N-S-D8W4-ET |
| | | | | | 50.0 m | 8146040 | NEBC-D8W4-ES-50-N-S-D8W4-ET |

Datasheet – EtherCAT® interface


| Ordering data – Accessories | | Description | | Part no. | Type |
|--|------------------------|---------------------------------------|--|----------|---------------------------------------|
| Connecting cable | | | | | |
|  | For power supply | Straight socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 5.0 m | 8065110 NEBL-M8G4-E-5-N-LE4 |
| | | | | 7.5 m | 8065113 NEBL-M8G4-E-7.5-N-LE4 |
| | | | | 10.0 m | 8065117 NEBL-M8G4-E-10-N-LE4 |
| | | | | 15.0 m | 8065121 NEBL-M8G4-E-15-N-LE4 |
| | | Angled socket, M8x1, 4-pin, A-coded | | 7.5 m | 8065114 NEBL-M8W4-E-7.5-N-LE4 |
| | For power transmission | | | 10.0 m | 8065118 NEBL-M8W4-E-10-N-LE4 |
| | | | | 15.0 m | 8065122 NEBL-M8W4-E-15-N-LE4 |
| | | Straight socket, M8x1, 4-pin, A-coded |  | 0.3 m | 8082904 NEBL-M8G4-E-0.3-N-M8G4 |
| | | | | 0.5 m | 8065102 NEBL-M8G4-E-0.5-N-M8G4 |
| | | | | 1.0 m | 8065104 NEBL-M8G4-E-1-N-M8G4 |
| | | | | 2.0 m | 8065106 NEBL-M8G4-E-2-N-M8G4 |
| | | | | 5.0 m | 8065108 NEBL-M8G4-E-5-N-M8G4 |
| | | | | 7.5 m | 8065111 NEBL-M8G4-E-7.5-N-M8G4 |
| | | | | 10.0 m | 8065115 NEBL-M8G4-E-10-N-M8G4 |
| | | | | 15.0 m | 8065119 NEBL-M8G4-E-15-N-M8G4 |
| | | Angled socket, M8x1, 4-pin, A-coded | | 0.3 m | 8146577 NEBL-M8W4-E-0.3-N-M8W4 |
| | | | | 0.5 m | 8065103 NEBL-M8W4-E-0.5-N-M8W4 |
| | | | | 1.0 m | 8065105 NEBL-M8W4-E-1-N-M8W4 |
| | | | | 2.0 m | 8065107 NEBL-M8W4-E-2-N-M8W4 |
| | | | | 5.0 m | 8065109 NEBL-M8W4-E-5-N-M8W4 |
| | | | | 7.5 m | 8065112 NEBL-M8W4-E-7.5-N-M8W4 |
| | | | | 10.0 m | 8065116 NEBL-M8W4-E-10-N-M8W4 |
| | | | | 15.0 m | 8065120 NEBL-M8W4-E-15-N-M8W4 |

| Ordering data – Accessories | | Description | | Pack size | Part no. | Type |
|--|--|--|----------------|-------------------|---------------------------|------|
| Inscription labels | | | | | | |
|  | For modules CPX-AP-I | Size 6x 12.5 mm, 10 frames with 24 pieces each | 240 | 8087174 | ASLR-L-X4-612-P240 | |
| Cover cap | | | | | | |
|  | For sealing unused connections | For connection M8x1 | 10 | 177672 | ISK-M8 | |
| DIN rail mounting | | | | | | |
|  | For mounting a module on DIN rails according to EN 60715 | - | 8095158 | CAF-M-X4-H | | |

Datasheet – EtherNet/IP interface

EtherNet/IP™

Interface for operating the remote I/O system CPX-AP-I in an Ethernet network using the protocols EtherNet/IP or Modbus/TCP. Data is transmitted on the basis of Industrial Ethernet.

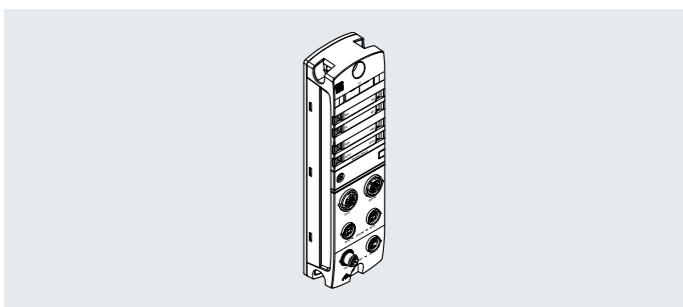**General technical data – EtherNet/IP interface**

| | |
|--|---|
| Fieldbus interface, protocol | EtherNet/IP |
| Fieldbus interface, function | Bus connection incoming/outgoing |
| Fieldbus interface, transmission rate | 100 Mbps |
| Fieldbus interface, type | Ethernet |
| Fieldbus interface, type of connection | 2 x socket |
| Fieldbus interface, connection technology | M12x1, D-coded to EN 61076-2-101 |
| Fieldbus interface, number of pins/cores | 4 |
| Fieldbus interface, galvanic isolation | Yes |
| Communication interface, protocol | AP |
| Communication interface, function | System communication: XF20 OUT / XF21 OUT |
| Communication interface, connection type | 2 x socket |
| Communication interface, connection technology | M8x1, D-coded to EN 61076-2-114 |
| Communication interface, number of pins/cores | 4 |
| Communication interface, shielding | Yes |

General data – EtherNet/IP interface

| | |
|--|---|
| Configuration support | EDS file |
| Max. number of modules | 80 |
| Max. address volume for outputs | 1,324 |
| Max. address volume inputs | 1,324 |
| Diagnostics via LED | Diagnostics per module Network status EtherNet/IP Power supply, electronics/sensors Power supply load System diagnostics Maintenance required |
| Diagnostics via bus | APDD invalid Load switch-off Communication to AP module interrupted Electronics/sensors overvoltage Load overvoltage Electronics/sensors undervoltage Undervoltage load |
| Diagnostics via internal communication | Module error Output short circuit/overload Short circuit/overload in sensor supply Undervoltage in load supply |
| Max. cable length | 50 m system communication |
| Note on max. cable length | Power supply according to nominal voltage |
| Reverse polarity protection | Yes |

Datasheet – EtherNet/IP interface

Technical data – Electrical – EtherNet/IP interface

| | |
|---|--|
| Nominal operating voltage DC for electronics/sensors | 24 V |
| Nominal operating voltage DC load | 24 V |
| Permissible voltage fluctuations, electronics/sensors | ± 25% |
| Permissible voltage fluctuations, load | ± 25% |
| Note on the operating voltage | SELV/PELV power supply units required; note voltage drop |
| Power failure buffering | 10 ms |
| Max. power supply | 2 x 4 A (external fuse required) |
| Intrinsic current consumption at nominal operating voltage, electronics/sensors | Typical 90 mA |
| Intrinsic current consumption at nominal operating voltage, load | Typical 5 mA |
| Power supply, function | Incoming electronics/sensors and load |
| Power supply, connection type | Plug |
| Power supply, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power supply, number of pins/cores | 4 |
| Power transmission, function | Outgoing electronics/sensors and load |
| Power transmission, connection type | Socket |
| Power transmission, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power transmission, number of pins/cores | 4 |

Technical data – Mechanical – EtherNet/IP interface

| | |
|----------------------|---|
| Type of mounting | On DIN rail with accessories; with through-hole |
| Product weight | 194 g |
| Dimensions W x L x H | 45 mm x 170 mm x 35 mm |

Materials – EtherNet/IP interface

| | |
|------------------------|--|
| Housing material | PA; PC; nickel-plated die-cast zinc |
| O-ring material | FPM |
| Note on materials | RoHS-compliant |
| LABS (PWIS) conformity | VDMA24364-B2-L |
| Cleanroom class | Element installed statically, no meaningful evaluation possible according to ISO 14644-1 |


Operating and environmental conditions – EtherNet/IP interface

| | |
|--|------------------------------|
| Ambient temperature | -20 ... 50 °C |
| Storage temperature | -40 ... 70 °C |
| Corrosion resistance class CRC ¹⁾ | 1 - Low corrosion stress |
| Relative humidity | 5 - 95%, non-condensing |
| CE marking (see declaration of conformity) ²⁾ | To EU EMC Directive |
| UKCA marking (see declaration of conformity) ³⁾ | To UK EMC regulations |
| KC marking | KC EMC |
| Certification | RCM c UL us - Listed (OL) |
| Certificate-issuing authority | UL E239998 |
| Degree of protection | IP65; IP67 |
| Note on degree of protection | Unused connections sealed |

¹⁾ More information www.festo.com/x/topic/crc²⁾ More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) Support/downloads.³⁾ More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) Support/downloads.


Datasheet – EtherNet/IP interface

Connection and display components

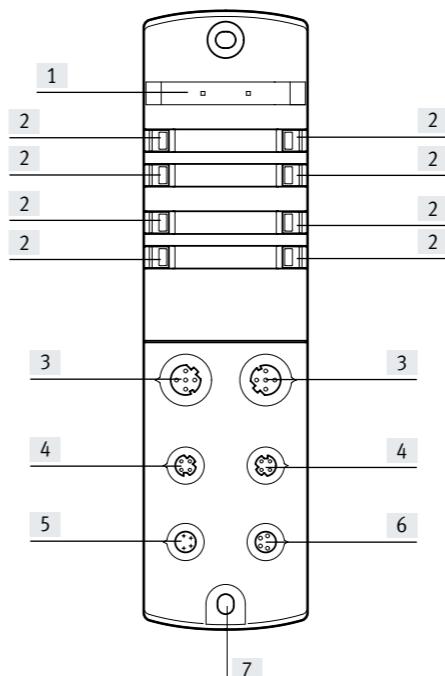

- [1] Space for inscription label
- [2] LED indicators
- [3] Network connections 1 and 2, EtherNet/IP
- [4] Communication interface
- [5] Electrical connection, power supply
- [6] Electrical connection, power transmission
- [7] Earth connection

Datasheet – EtherNet/IP interface

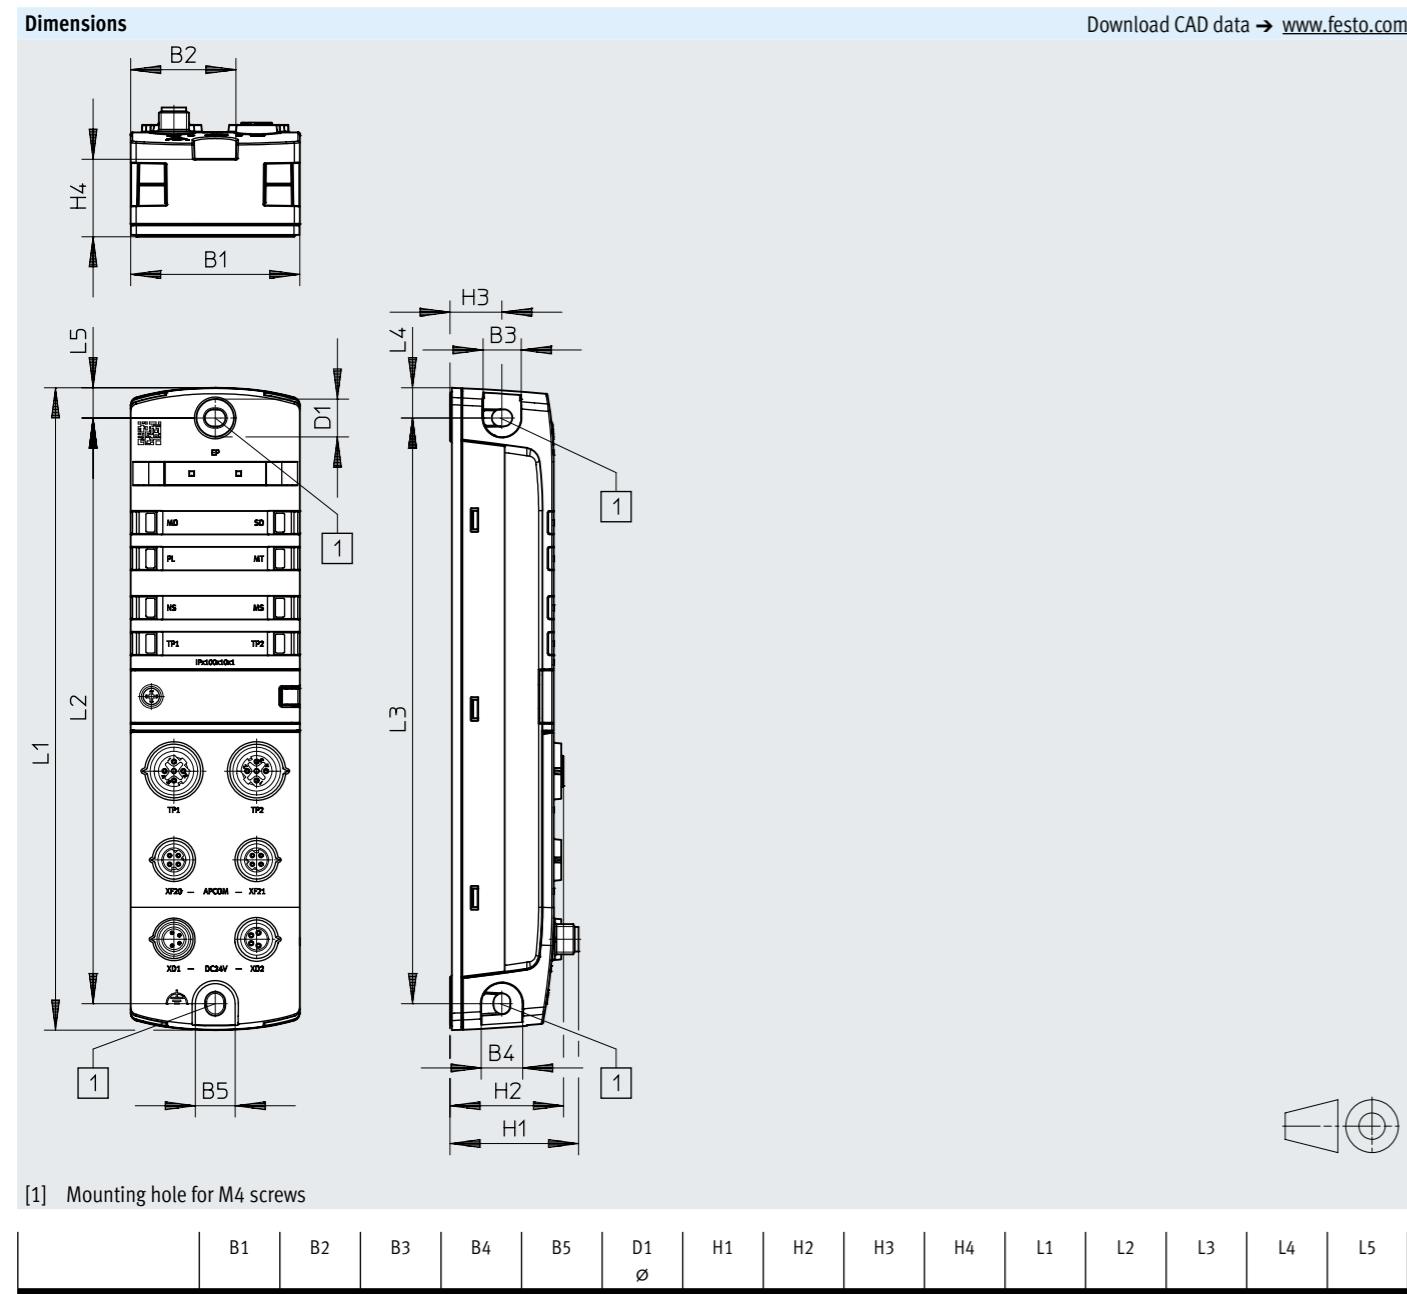

Datasheet – EtherNet/IP interface

Ordering data

| | Part no. | Type |
|-----------------------|----------|-----------------|
| EtherNet/IP interface | 8086610 | CPX-AP-I-EP-M12 |



Ordering data – Accessories

| Description | Part no. | Type |
|-----------------------------------|----------|----------------------|
| Plug connectors for self-assembly | 543109 | NECU-M-S-D12G4-C2-ET |

Connecting cable

| For bus connection | For communication interface | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 0.3 m | 8082902 | NEBC-D8G4-ES-0.3-N-S-D8G4-ET |
|--------------------|-----------------------------|-------------------------------------|-------------------------------------|--------|---------|------------------------------|
| | | | | 0.5 m | 8065123 | NEBC-D8G4-ES-0.5-N-S-D8G4-ET |
| | | | | 1.0 m | 8065125 | NEBC-D8G4-ES-1-N-S-D8G4-ET |
| | | | | 2.0 m | 8065127 | NEBC-D8G4-ES-2-N-S-D8G4-ET |
| | | | | 5.0 m | 8065129 | NEBC-D8G4-ES-5-N-S-D8G4-ET |
| | | | | 7.5 m | 8065131 | NEBC-D8G4-ES-7.5-N-S-D8G4-ET |
| | | | | 10.0 m | 8065133 | NEBC-D8G4-ES-10-N-S-D8G4-ET |
| | | | | 15.0 m | 8065135 | NEBC-D8G4-ES-15-N-S-D8G4-ET |
| | | | | 20.0 m | 8146031 | NEBC-D8G4-ES-20-N-S-D8G4-ET |
| | | | | 25.0 m | 8146032 | NEBC-D8G4-ES-25-N-S-D8G4-ET |
| | | | | 30.0 m | 8146033 | NEBC-D8G4-ES-30-N-S-D8G4-ET |
| | | | | 40.0 m | 8146034 | NEBC-D8G4-ES-40-N-S-D8G4-ET |
| | | | | 50.0 m | 8146035 | NEBC-D8G4-ES-50-N-S-D8G4-ET |
| | | | | 0.5 m | 8065124 | NEBC-D8W4-ES-0.5-N-S-D8W4-ET |
| | | | | 1.0 m | 8065126 | NEBC-D8W4-ES-1-N-S-D8W4-ET |
| | | | | 2.0 m | 8065128 | NEBC-D8W4-ES-2-N-S-D8W4-ET |
| | | | | 5.0 m | 8065130 | NEBC-D8W4-ES-5-N-S-D8W4-ET |
| | | | | 7.5 m | 8065132 | NEBC-D8W4-ES-7.5-N-S-D8W4-ET |
| | | | | 10.0 m | 8065134 | NEBC-D8W4-ES-10-N-S-D8W4-ET |
| | | | | 15.0 m | 8065136 | NEBC-D8W4-ES-15-N-S-D8W4-ET |
| | | | | 20.0 m | 8146036 | NEBC-D8W4-ES-20-N-S-D8W4-ET |
| | | | | 25.0 m | 8146037 | NEBC-D8W4-ES-25-N-S-D8W4-ET |
| | | | | 30.0 m | 8146038 | NEBC-D8W4-ES-30-N-S-D8W4-ET |
| | | | | 40.0 m | 8146039 | NEBC-D8W4-ES-40-N-S-D8W4-ET |
| | | | | 50.0 m | 8146040 | NEBC-D8W4-ES-50-N-S-D8W4-ET |

Datasheet – EtherNet/IP interface


| Ordering data – Accessories | | Description | | Part no. | Type | |
|--|--|--|---|-------------------|---------------------------------------|--|
| Connecting cable | | | | | | |
|  | For power supply | Straight socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 5.0 m | 8065110 NEBL-M8G4-E-5-N-LE4 | |
| | | | | 7.5 m | 8065113 NEBL-M8G4-E-7.5-N-LE4 | |
| | | | | 10.0 m | 8065117 NEBL-M8G4-E-10-N-LE4 | |
| | | | | 15.0 m | 8065121 NEBL-M8G4-E-15-N-LE4 | |
| | | Angled socket, M8x1, 4-pin, A-coded | | 7.5 m | 8065114 NEBL-M8W4-E-7.5-N-LE4 | |
| | For power transmission | | | 10.0 m | 8065118 NEBL-M8W4-E-10-N-LE4 | |
| | | | | 15.0 m | 8065122 NEBL-M8W4-E-15-N-LE4 | |
| | | Straight socket, M8x1, 4-pin, A-coded |  | 0.3 m | 8082904 NEBL-M8G4-E-0.3-N-M8G4 | |
| | | | | 0.5 m | 8065102 NEBL-M8G4-E-0.5-N-M8G4 | |
| | | | | 1.0 m | 8065104 NEBL-M8G4-E-1-N-M8G4 | |
| | | | | 2.0 m | 8065106 NEBL-M8G4-E-2-N-M8G4 | |
| | | | | 5.0 m | 8065108 NEBL-M8G4-E-5-N-M8G4 | |
| | | | | 7.5 m | 8065111 NEBL-M8G4-E-7.5-N-M8G4 | |
| | | | | 10.0 m | 8065115 NEBL-M8G4-E-10-N-M8G4 | |
| | | | | 15.0 m | 8065119 NEBL-M8G4-E-15-N-M8G4 | |
| | | Angled socket, M8x1, 4-pin, A-coded | | 0.3 m | 8146577 NEBL-M8W4-E-0.3-N-M8W4 | |
| | | | | 0.5 m | 8065103 NEBL-M8W4-E-0.5-N-M8W4 | |
| | | | | 1.0 m | 8065105 NEBL-M8W4-E-1-N-M8W4 | |
| | | | | 2.0 m | 8065107 NEBL-M8W4-E-2-N-M8W4 | |
| | | | | 5.0 m | 8065109 NEBL-M8W4-E-5-N-M8W4 | |
| | | | | 7.5 m | 8065112 NEBL-M8W4-E-7.5-N-M8W4 | |
| | | | | 10.0 m | 8065116 NEBL-M8W4-E-10-N-M8W4 | |
| | | | | 15.0 m | 8065120 NEBL-M8W4-E-15-N-M8W4 | |
| Ordering data – Accessories | | Description | Pack size | Part no. | Type | |
| Inscription labels | | | | | | |
|  | For modules CPX-AP-I | Size 6x 12.5 mm, 10 frames with 24 pieces each | 240 | 8087174 | ASLR-L-X4-612-P240 | |
| Cover cap | | | | | | |
|  | For sealing unused connections | For connection M8x1 | 10 | 177672 | ISK-M8 | |
| DIN rail mounting | | | | | | |
|  | For mounting a module on DIN rails according to EN 60715 | – | 8095158 | CAF-M-X4-H | | |

Datasheet – IO-Link master

Function

The IO-Link master has 4 IO-Link® connections, which enable any IO-Link® components and Festo components with an I-Port connection to be linked up to the remote I/O system CPX-AP-I.

- IO-Link master
- Connection M12x1, 5-pin
- Status and error indication via LED

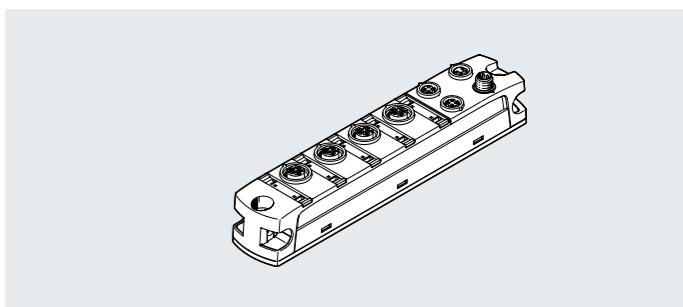

Description

The IO-Link® communication system is used to exchange serial data from decentralised function modules (devices) at the field level. The IO-Link master provides four external IO-Link® interfaces, at each of which a device can be connected.

The connection type corresponds to a star topology, which means that only one device can be connected to each port. In the factory settings, each IO-Link® port has an address space with 9 bytes of input data and 8 bytes of output data.

The address space, master port and the connected devices can be parameterised with the help of the IO-Link Device Tool. DIL switches are available for a range of further settings. A 30-day trial version of the IO-Link Device Tool can be downloaded from the Support Portal. A licence is required at the end of the test period. The licence required for continued use can be purchased via the Festo AppWorld.

General technical data – IO-Link master

| | |
|---|---|
| Protocol | IO-Link® |
| IO-Link®, protocol version | Master V 1.1 |
| IO-Link®, communication mode | DI, COM1. COM2. COM3.; configurable with software |
| IO-Link®, port class | B |
| IO-Link®, number of ports | 4 |
| IO-Link®, process data width OUT | Can be parameterised 8 - 128 bytes |
| IO-Link®, process data width IN | Can be parameterised 12 - 132 bytes |
| IO-Link®, communication | C/Q LED green |
| Electrical connection for IO-Link®, connection type | 4x socket |
| Electrical connection for IO-Link®, connection technology | M12x1, A-coded to EN 61076-2-101 |
| Electrical connection for IO-Link®, number of pins/cores | 5 |
| Communication interface, protocol | AP |
| Communication interface, function | System communication XF10 IN / XF20 OUT |
| Communication interface, connection type | 2 x socket |
| Communication interface, connection technology | M8x1, D-coded to EN 61076-2-114 |
| Communication interface, number of pins/cores | 4 |
| Communication interface, shielding | Yes |

General data – IO-Link® master

| | |
|--|---|
| Diagnostics via LED | Diagnostics per channel Diagnostics per module Power supply load Status per channel Status per module |
| Diagnostics via internal communication | IO-Link® event Short circuit/overload in sensor supply Electronics/sensors overvoltage Load overvoltage Electronics/sensors undervoltage Undervoltage load |
| Max. cable length | 20 m with IO-Link® operation 50 m system communication |
| Reverse polarity protection | Yes |

Datasheet – IO-Link master

Technical data – Electrical – IO-Link® master

| | |
|---|--|
| Nominal operating voltage DC for electronics/sensors | 24 V |
| Nominal operating voltage DC load | 24 V |
| Permissible voltage fluctuations, electronics/sensors | ± 25% |
| Permissible voltage fluctuations, load | ± 25% |
| Note on the operating voltage | SELV/PELV power supply units required Note voltage drop |
| Power failure buffering | 10 ms |
| Max. power supply | 2 x 4 A (external fuse required) |
| Intrinsic current consumption at nominal operating voltage, electronics/sensors | Typical 55 mA |
| Intrinsic current consumption at nominal operating voltage, load | Typical 5 mA |
| Power supply, function | Incoming electronics/sensors and load |
| Power supply, connection type | Plug |
| Power supply, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power supply, number of pins/cores | 4 |
| Power transmission, function | Outgoing electronics/sensors and load |
| Power transmission, connection type | Socket |
| Power transmission, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power transmission, number of pins/cores | 4 |

Technical data – Mechanical – IO-Link master

| | |
|----------------------|---|
| Type of mounting | On DIN rail with accessories With through-hole |
| Product weight | 126 g |
| Dimensions W x L x H | 30 mm x 170 mm x 35 mm |

Materials – IO-Link master

| | |
|------------------------|--|
| Housing material | PA; PC; nickel-plated die-cast zinc |
| O-ring material | FPM |
| Note on materials | RoHs-compliant |
| LABS (PWIS) conformity | VDMA24364-B2-L |
| Cleanroom class | Element installed statically, no meaningful evaluation possible according to ISO 14644-1 |


Operating and environmental conditions – IO-Link master

| | |
|--|---------------------------------|
| Ambient temperature | -20°C, 50°C |
| Storage temperature | -40°C, 70°C |
| Corrosion resistance class CRC ¹⁾ | 1 - Low corrosion stress |
| Relative humidity | 5 - 95%, non-condensing |
| CE marking (see declaration of conformity) ²⁾ | To EU EMC Directive |
| UKCA marking (see declaration of conformity) ³⁾ | To UK EMC regulations |
| KC marking | KC EMC |
| Certification | RCM Mark, c UL us - Listed (OL) |
| Certificate-issuing authority | UL E239998 |
| Degree of protection | IP65; IP67 |
| Note on degree of protection | Unused connections sealed |

¹⁾ More information www.festo.com/x/topic/crc²⁾ More information www.festo.com/catalogue/... Support/downloads.³⁾ More information www.festo.com/catalogue/... Support/downloads.

Datasheet – IO-Link master

Connection and display components

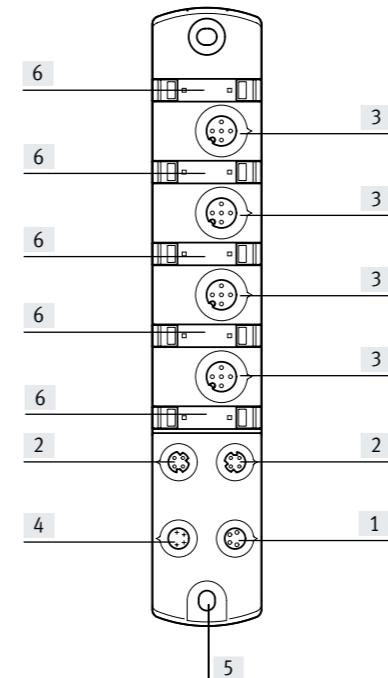

[1] Electrical connection, power transmission


[2] Communication interface

[3] Electrical connection, IO-Link®

[4] Electrical connection, power supply


[5] Earth connection

[6] Space for inscription label

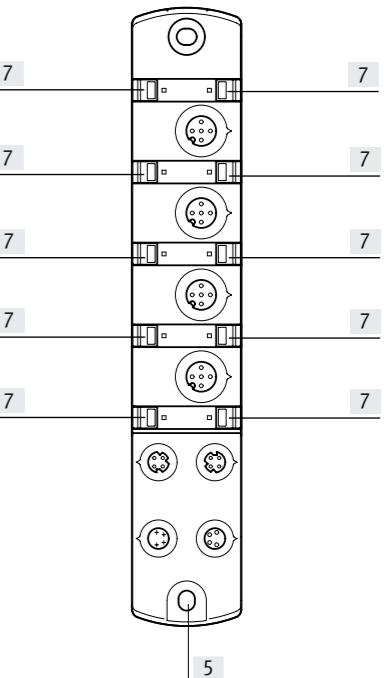

[7] LED indicators




Datasheet – IO-Link master

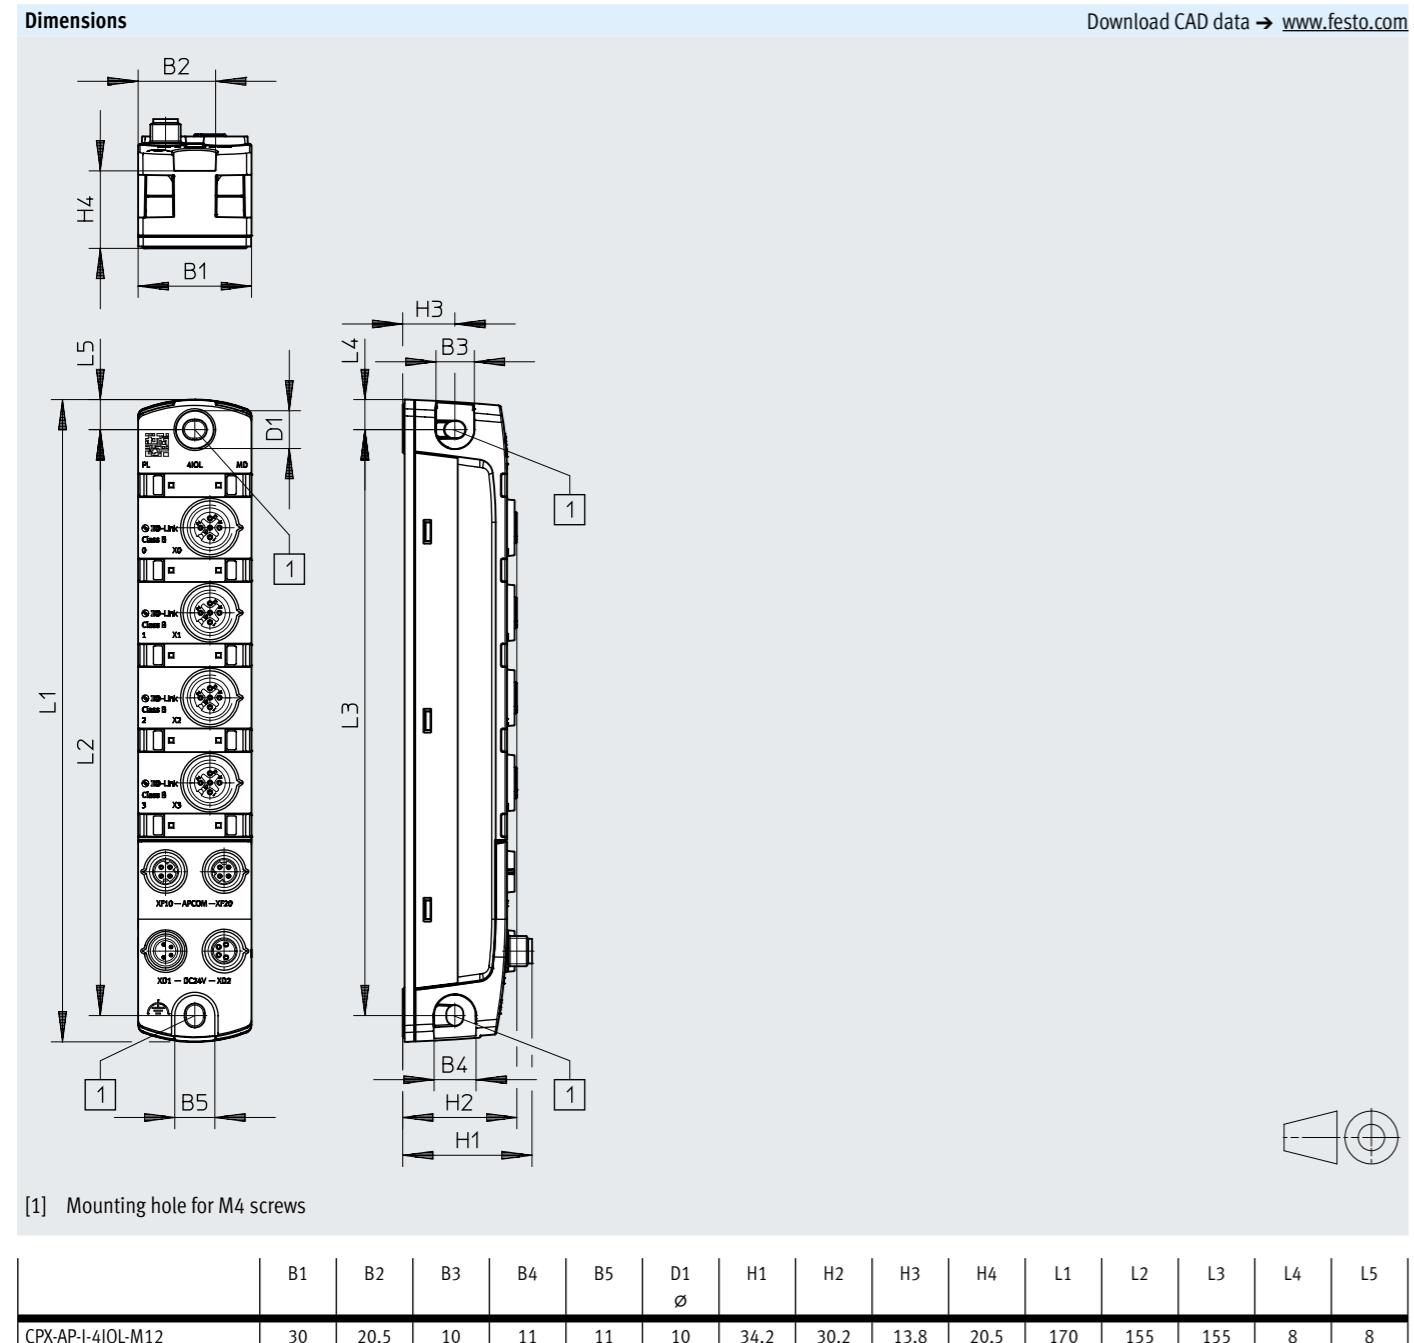

Datasheet – IO-Link master

| Ordering data | | Part no. | Type |
|--|---|--|--|
| | IO-Link master | Electrical connection, IO-Link® 4x sockets, 5-pin, M12x1 | 8086604 CPX-AP-I-4IOL-M12 |
| Ordering data – Accessories | | | |
| Description | | Part no. | Type |
| Plug connectors for self-assembly | | | |
| | For IO-Link® Straight plug, M12x1, 5-pin, A-coded | Screw terminal | 8162296 NECB-S-M12G5-C2 |
| Connecting cable | | | |
| | For IO-Link® Straight socket, M12x1, 5-pin, A-coded | Straight plug, M12x1, 5-pin, A-coded | 5.0 m 574321 NEBU-M12G5-E-5-Q8N-M12G5 7.5 m 574322 NEBU-M12G5-E-7.5-Q8N-M12G5 |
| | For communication interface Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 0.3 m 8082902 NEBC-D8G4-ES-0.3-N-S-D8G4-ET 0.5 m 8065123 NEBC-D8G4-ES-0.5-N-S-D8G4-ET 1.0 m 8065125 NEBC-D8G4-ES-1-N-S-D8G4-ET 2.0 m 8065127 NEBC-D8G4-ES-2-N-S-D8G4-ET 5.0 m 8065129 NEBC-D8G4-ES-5-N-S-D8G4-ET 7.5 m 8065131 NEBC-D8G4-ES-7.5-N-S-D8G4-ET 10.0 m 8065133 NEBC-D8G4-ES-10-N-S-D8G4-ET 15.0 m 8065135 NEBC-D8G4-ES-15-N-S-D8G4-ET 20.0 m 8146031 NEBC-D8G4-ES-20-N-S-D8G4-ET 25.0 m 8146032 NEBC-D8G4-ES-25-N-S-D8G4-ET 30.0 m 8146033 NEBC-D8G4-ES-30-N-S-D8G4-ET 40.0 m 8146034 NEBC-D8G4-ES-40-N-S-D8G4-ET 50.0 m 8146035 NEBC-D8G4-ES-50-N-S-D8G4-ET |
| | Angled plug, M8x1, 4-pin, D-coded | Angled plug, M8x1, 4-pin, D-coded | 0.5 m 8065124 NEBC-D8W4-ES-0.5-N-S-D8W4-ET 1.0 m 8065126 NEBC-D8W4-ES-1-N-S-D8W4-ET 2.0 m 8065128 NEBC-D8W4-ES-2-N-S-D8W4-ET 5.0 m 8065130 NEBC-D8W4-ES-5-N-S-D8W4-ET 7.5 m 8065132 NEBC-D8W4-ES-7.5-N-S-D8W4-ET 10.0 m 8065134 NEBC-D8W4-ES-10-N-S-D8W4-ET 15.0 m 8065136 NEBC-D8W4-ES-15-N-S-D8W4-ET 20.0 m 8146036 NEBC-D8W4-ES-20-N-S-D8W4-ET 25.0 m 8146037 NEBC-D8W4-ES-25-N-S-D8W4-ET 30.0 m 8146038 NEBC-D8W4-ES-30-N-S-D8W4-ET 40.0 m 8146039 NEBC-D8W4-ES-40-N-S-D8W4-ET 50.0 m 8146040 NEBC-D8W4-ES-50-N-S-D8W4-ET |
| | For power supply Straight socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 5.0 m 8065110 NEBL-M8G4-E-5-N-LE4 7.5 m 8065113 NEBL-M8G4-E-7.5-N-LE4 10.0 m 8065117 NEBL-M8G4-E-10-N-LE4 15.0 m 8065121 NEBL-M8G4-E-15-N-LE4 |
| | Angled socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 7.5 m 8065114 NEBL-M8W4-E-7.5-N-LE4 10.0 m 8065118 NEBL-M8W4-E-10-N-LE4 15.0 m 8065122 NEBL-M8W4-E-15-N-LE4 |

Datasheet – IO-Link master


| Ordering data – Accessories | | Description | | Part no. | | Type |
|--|--|--|-------------------------------------|----------------|--------------------------|------------------------|
| Connecting cable | | | | | | |
|  | For power transmission | Straight socket, M8x1, 4-pin, A-coded | Straight plug, M8x1, 4-pin, A-coded | 0.3 m | 8082904 | NEBL-M8G4-E-0.3-N-M8G4 |
| | | | | 0.5 m | 8065102 | NEBL-M8G4-E-0.5-N-M8G4 |
| | | | | 1.0 m | 8065104 | NEBL-M8G4-E-1-N-M8G4 |
| | | | | 2.0 m | 8065106 | NEBL-M8G4-E-2-N-M8G4 |
| | | | | 5.0 m | 8065108 | NEBL-M8G4-E-5-N-M8G4 |
| | | | | 7.5 m | 8065111 | NEBL-M8G4-E-7.5-N-M8G4 |
| | | | | 10.0 m | 8065115 | NEBL-M8G4-E-10-N-M8G4 |
| | | | | 15.0 m | 8065119 | NEBL-M8G4-E-15-N-M8G4 |
|  | Angled socket, M8x1, 4-pin, A-coded | Angled plug, M8x1, 4-pin, A-coded | | 0.3 m | 8146577 | NEBL-M8W4-E-0.3-N-M8W4 |
| | | | | 0.5 m | 8065103 | NEBL-M8W4-E-0.5-N-M8W4 |
| | | | | 1.0 m | 8065105 | NEBL-M8W4-E-1-N-M8W4 |
| | | | | 2.0 m | 8065107 | NEBL-M8W4-E-2-N-M8W4 |
| | | | | 5.0 m | 8065109 | NEBL-M8W4-E-5-N-M8W4 |
| | | | | 7.5 m | 8065112 | NEBL-M8W4-E-7.5-N-M8W4 |
| | | | | 10.0 m | 8065116 | NEBL-M8W4-E-10-N-M8W4 |
| | | | | 15.0 m | 8065120 | NEBL-M8W4-E-15-N-M8W4 |
| Ordering data – Accessories | | Description | | Pack size | Part no. | Type |
| Inscription labels | | | | | | |
|  | For modules CPX-AP-I | Size 6x 12.5 mm, 10 frames with 24 pieces each | 240 | 8087174 | ASLR-LX4-612-P240 | |
| Cover cap | | | | | | |
|  | For sealing unused connections | For connection M8x1 | 10 | 165592 | ISK-M12 | |
| DIN rail mounting | | | | | | |
|  | For mounting a module on DIN rails according to EN 60715 | | - | 8095158 | CAF-M-X4-H | |

Technical data – Digital 4-way input modules

Function

Digital input modules allow electric sensors to be connected according to IEC 61131-2 type 3 (inductive, capacitive) with an operating voltage of 24 V DC.

- Input modules for 24 V DC operating voltage
- Connection M8x1, 3-pin
- Status and error indication via LED



General technical data – Digital 4-way input modules

| | |
|---|--|
| Number of inputs | 4 |
| Electrical connection, input, function | Digital input |
| Electrical connection, input, connection type | 4x socket |
| Electrical connection, input, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Electrical connection, input, number of pins/cores | 3 |
| Switching logic at inputs | PNP (positive switching) 2-wire sensors to IEC 61131-2 3-wire sensors to IEC 61131-2 |
| Input characteristics | To IEC 61131-2, type 3 |
| Switching level | Signal 0: <= 5 V, signal 1: >= 11 V |
| Fuse protection inputs (short circuit) | Internal electronic fuse per module |
| Input debounce time | 0.1 ms; 3 ms; 10 ms; 20 ms |
| Communication interface, protocol | AP |
| Communication interface, function | System communication XF10 IN |
| Communication interface, connection type | Socket |
| Communication interface, connection technology | M8x1, D-coded to EN 61076-2-114 |
| Communication interface, number of pins/cores | 4 |
| Communication interface, shielding | Yes |

General data – Digital 4-way input modules

| | |
|---|--|
| Electrical isolation of inputs between channel - internal communication | Yes |
| Diagnostics via LED | Diagnostics per module Status per channel |
| Diagnostics via internal communication | Short circuit/overload in sensor supply Electronics/sensors overvoltage Electronics/sensors undervoltage |
| Max. cable length | 30 m inputs 50 m system communication |
| Reverse polarity protection | Yes |

Technical data – Electrical – Digital 4-way input modules

| | |
|---|--|
| Nominal operating voltage DC for electronics/sensors | 24 V |
| Permissible voltage fluctuations, electronics/sensors | ± 25% |
| Note on the operating voltage | SELV/PELV power supply units required; note voltage drop |
| Power failure buffering | 10 ms |
| Max. power supply | 2 x 4 A (external fuse required) |
| Max. total current of inputs per module | 0.8 A |
| Intrinsic current consumption at nominal operating voltage, electronics/sensors | Typical 32 mA |
| Power supply, function | Incoming electronics/sensors and load |
| Power supply, connection type | Plug |
| Power supply, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power supply, number of pins/cores | 4 |

Technical data – Digital 4-way input modules

Technical data – Mechanical – Digital 4-fold input modules

| | |
|----------------------|--------------------------|
| Type of mounting | With through-hole |
| Product weight | 81 g |
| Dimensions W x L x H | 30 mm x 102.5 mm x 35 mm |

Materials – digital 4-way input modules

| | |
|------------------------|--|
| Housing material | PA; PC; nickel-plated die-cast zinc |
| Sealing material | NBR |
| O-ring material | FPM |
| Note on materials | RoHS-compliant |
| LABS (PWIS) conformity | VDMA24364-B2-L |
| Cleanroom class | Element installed statically, no meaningful evaluation possible according to ISO 14644-1 |


Operating and environmental conditions digital 4-way input modules

| | |
|--|------------------------------|
| Ambient temperature | -20 ... 50 °C |
| Storage temperature | -40 ... 70 °C |
| Corrosion resistance class CRC ¹⁾ | 1 - Low corrosion stress |
| Relative humidity | 5 - 95%, non-condensing |
| CE marking (see declaration of conformity) ²⁾ | To EU EMC Directive |
| UKCA marking (see declaration of conformity) ³⁾ | To UK EMC regulations |
| KC marking | KC EMC |
| Certification | RCM c UL us - Listed (OL) |
| Certificate-issuing authority | UL E239998 |
| Degree of protection | IP65; IP67 |
| Note on degree of protection | Unused connections sealed |

1) More information www.festo.com/x/topic/crc2) More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) Support/downloads.3) More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) Support/downloads.

Technical data – Digital 4-way input modules

Connection and display components

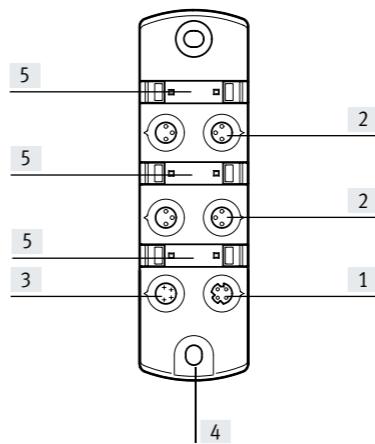


[1] Communication interface

[2] Electrical connection, inputs

[3] Electrical connection, power supply


[4] Earthing connection

[5] Space for inscription label

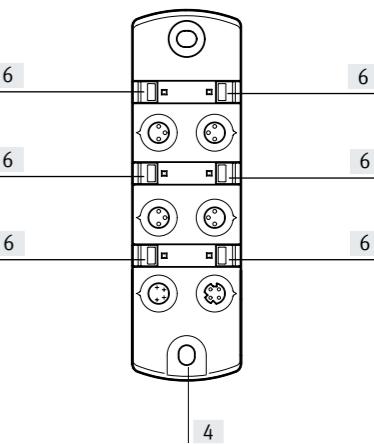

[6] LED indicators

Technical data – Digital 4-way input modules

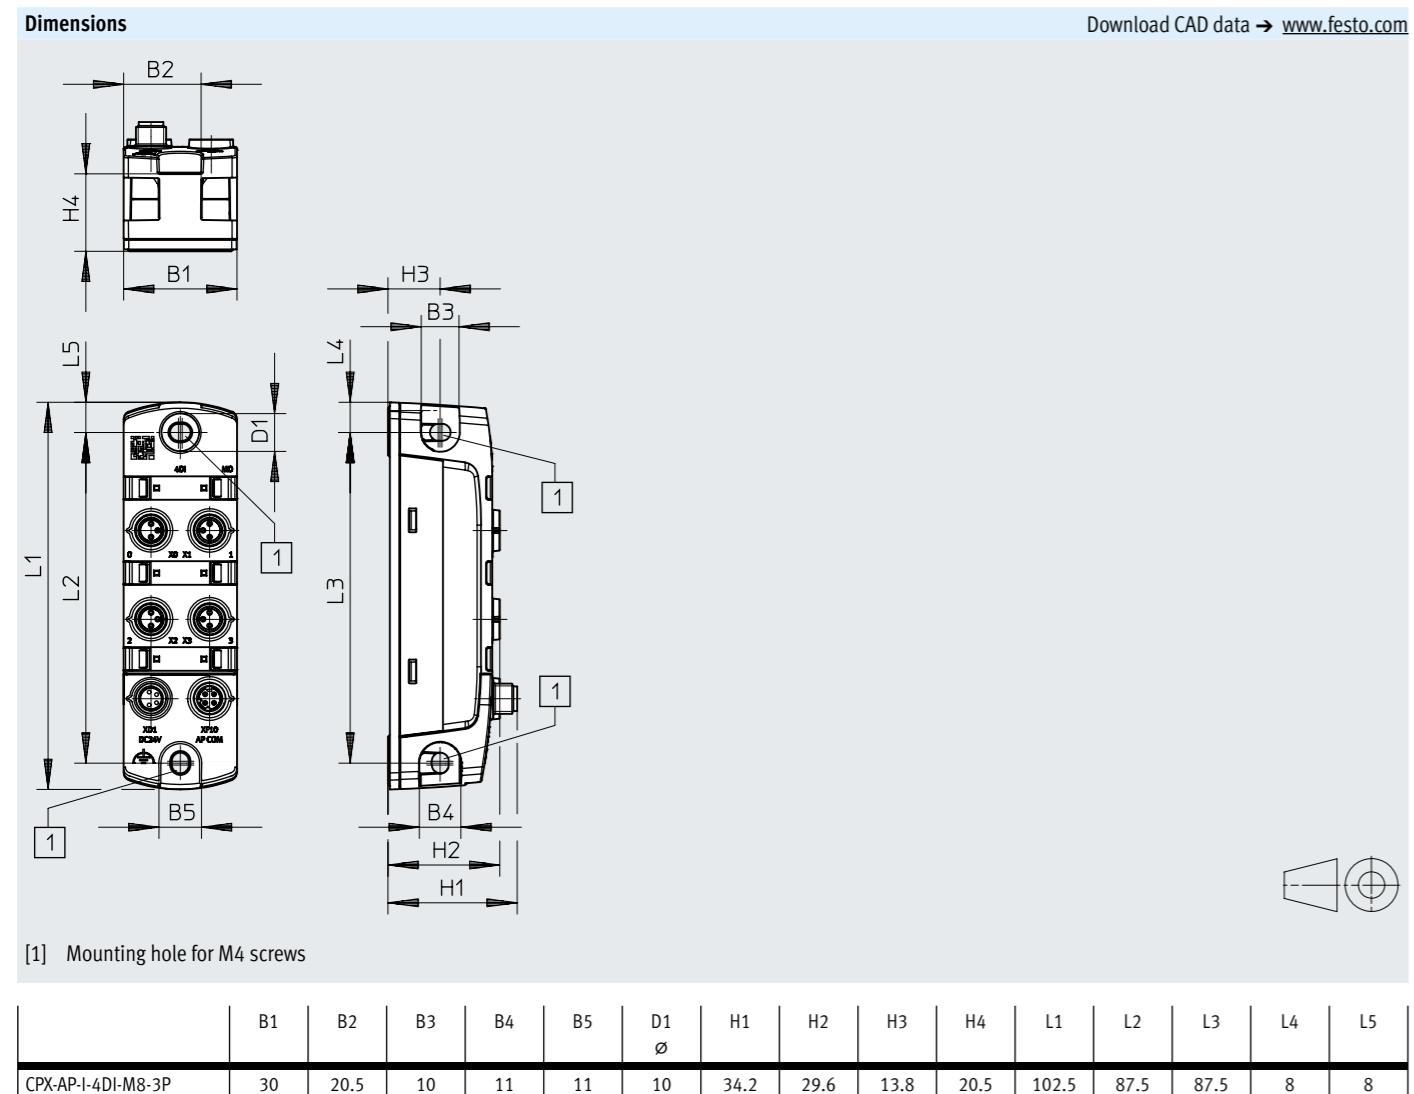

Technical data – Digital 4-way input modules

| Ordering data | | Part no. | Type |
|-----------------------------------|---------------------------------------|----------|------------------------------|
| | Digital input module | 808605 | CPX-AP-I-4DI-M8-3P |
| Ordering data – Accessories | | Part no. | Type |
| | Description | 8162298 | NECB-S-M8G3-C2 |
| Plug connectors for self-assembly | | | |
| | For inputs | 8078282 | NEBA-M8G3-U-0.5-N-M8G3 |
| | Straight plug, M8x1, 3-pin, A-coded | 8078283 | NEBA-M8G3-U-1-N-M8G3 |
| | Straight socket, M8x1, 3-pin, A-coded | 8078284 | NEBA-M8G3-U-1.5-N-M8G3 |
| | For communication interface | 8078286 | NEBA-M8G3-U-2.5-N-M8G3 |
| | Straight plug, M8x1, 4-pin, D-coded | 8078287 | NEBA-M8G3-U-5-N-M8G3 |
| | Straight socket, M8x1, 3-pin, A-coded | 8078288 | NEBA-M8G3-U-10-N-M8G3 |
| Connecting cable | | | |
| | For inputs | 8078282 | NEBC-D8G4-ES-0.3-N-S-D8G4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | 8078283 | NEBC-D8G4-ES-0.5-N-S-D8G4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | 8078284 | NEBC-D8G4-ES-1-N-S-D8G4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | 8078286 | NEBC-D8G4-ES-2-N-S-D8G4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | 8078287 | NEBC-D8G4-ES-5-N-S-D8G4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | 8078288 | NEBC-D8G4-ES-7.5-N-S-D8G4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | 8078289 | NEBC-D8G4-ES-10-N-S-D8G4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | 8078290 | NEBC-D8G4-ES-15-N-S-D8G4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | 8078291 | NEBC-D8G4-ES-20-N-S-D8G4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | 8078292 | NEBC-D8G4-ES-25-N-S-D8G4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | 8078293 | NEBC-D8G4-ES-30-N-S-D8G4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | 8078294 | NEBC-D8G4-ES-40-N-S-D8G4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | 8078295 | NEBC-D8G4-ES-50-N-S-D8G4-ET |
| | Angled plug, M8x1, 4-pin, D-coded | 8065124 | NEBC-D8W4-ES-0.5-N-S-D8W4-ET |
| | Angled plug, M8x1, 4-pin, D-coded | 8065125 | NEBC-D8W4-ES-1-N-S-D8W4-ET |
| | Angled plug, M8x1, 4-pin, D-coded | 8065126 | NEBC-D8W4-ES-2-N-S-D8W4-ET |
| | Angled plug, M8x1, 4-pin, D-coded | 8065127 | NEBC-D8W4-ES-5-N-S-D8W4-ET |
| | Angled plug, M8x1, 4-pin, D-coded | 8065128 | NEBC-D8W4-ES-7.5-N-S-D8W4-ET |
| | Angled plug, M8x1, 4-pin, D-coded | 8065129 | NEBC-D8W4-ES-10-N-S-D8W4-ET |
| | Angled plug, M8x1, 4-pin, D-coded | 8065130 | NEBC-D8W4-ES-15-N-S-D8W4-ET |
| | Angled plug, M8x1, 4-pin, D-coded | 8065131 | NEBC-D8W4-ES-20-N-S-D8W4-ET |
| | Angled plug, M8x1, 4-pin, D-coded | 8065132 | NEBC-D8W4-ES-25-N-S-D8W4-ET |
| | Angled plug, M8x1, 4-pin, D-coded | 8065133 | NEBC-D8W4-ES-30-N-S-D8W4-ET |
| | Angled plug, M8x1, 4-pin, D-coded | 8065134 | NEBC-D8W4-ES-40-N-S-D8W4-ET |
| | Angled plug, M8x1, 4-pin, D-coded | 8065135 | NEBC-D8W4-ES-50-N-S-D8W4-ET |
| | For power supply | 8065110 | NEBL-M8G4-E-5-N-LE4 |
| | Straight socket, M8x1, 4-pin, A-coded | 8065113 | NEBL-M8G4-E-7.5-N-LE4 |
| | Straight socket, M8x1, 4-pin, A-coded | 8065117 | NEBL-M8G4-E-10-N-LE4 |
| | Straight socket, M8x1, 4-pin, A-coded | 8065121 | NEBL-M8G4-E-15-N-LE4 |
| | Angled socket, M8x1, 4-pin, A-coded | 8065114 | NEBL-M8W4-E-7.5-N-LE4 |
| | Angled socket, M8x1, 4-pin, A-coded | 8065118 | NEBL-M8W4-E-10-N-LE4 |
| | Angled socket, M8x1, 4-pin, A-coded | 8065122 | NEBL-M8W4-E-15-N-LE4 |

Technical data – Digital 4-way input modules


| Ordering data – Accessories | | Pack size | Part no. | Type |
|--|----------------------|--|---------------------|-----------------------------------|
| Inscription labels | Description | | | |
|  | For modules CPX-AP-I | Size 6x 12.5 mm, 10 frames with 24 pieces each | 240 | 8087174 ASLR-L-X4-612-P240 |
| Cover cap | Description | For sealing unused connections | For connection M8x1 | 10 177672 ISK-M8 |
| DIN rail mounting | Description | For mounting a module on DIN rails according to EN 60715 | - | 8095158 CAFM-X4-H |

Technical data – Digital 8-way input modules

Function

Digital input modules allow electric sensors to be connected according to IEC 61131-2 type 3 (inductive, capacitive) with an operating voltage of 24 V DC.

- Input modules for 24 V DC operating voltage
- Connection M8x1 3-pin or M12x1 5-pin
- Status and error indication via LED

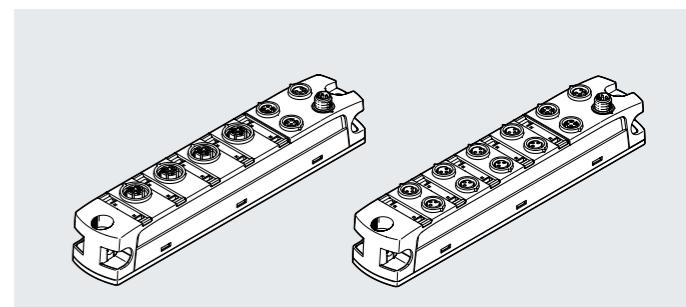**General technical data – Digital 8-way input modules**

| | |
|---|--|
| Electrical connection, input, connection type | 4x socket; 8x socket |
| Number of inputs | 8 |
| Electrical connection, input, function | Digital input |
| Electrical connection, input, connection technology | M8x1, A-coded to EN 61076-2-104; M12x1 A-coded to EN 61076-2-101 |
| Electrical connection, input, number of pins/cores | 3 ... 5 |
| Switching logic at inputs | PNP (positive switching) 2-wire sensors to IEC 61131-2 3-wire sensors to IEC 61131-2 |
| Input characteristics | To IEC 61131-2, type 3 |
| Switching level | Signal 0: <= 5 V, signal 1: >= 11 V |
| Fuse protection inputs (short circuit) | Internal electronic fuse per module |
| Input debounce time | 0.1 ms; 3 ms; 10 ms; 20 ms |
| Communication interface, protocol | AP |
| Communication interface, function | System communication XF10 IN / XF20 OUT |
| Communication interface, connection type | 2 x socket |
| Communication interface, connection technology | M8x1, D-coded to EN 61076-2-114 |
| Communication interface, number of pins/cores | 4 |
| Communication interface, shielding | Yes |

General data – Digital 8-way input modules

| | |
|---|--|
| Electrical isolation of inputs between channel - internal communication | Yes |
| Diagnostics via LED | Diagnostics per module Status per channel |
| Diagnostics via internal communication | Short circuit/overload in sensor supply Electronics/sensors overvoltage Electronics/sensors undervoltage |
| Max. cable length | 30 m inputs 50 m system communication |
| Reverse polarity protection | Yes |

Technical data – Digital 8-way input modules

Technical data – Electrical digital 8-way input modules

| | |
|---|--|
| Nominal operating voltage DC for electronics/sensors | 24 V |
| Permissible voltage fluctuations, electronics/sensors | ± 25% |
| Note on the operating voltage | SELV/PELV power supply units required; note voltage drop |
| Power failure buffering | 10 ms |
| Max. power supply | 2 x 4 A (external fuse required) |
| Max. total current of inputs per module | 1.8 A |
| Intrinsic current consumption at nominal operating voltage, electronics/sensors | Typical 32 mA |
| Power supply, function | Incoming electronics/sensors and load |
| Power supply, connection type | Plug |
| Power supply, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power supply, number of pins/cores | 4 |
| Power transmission, function | Outgoing electronics/sensors and load |
| Power transmission, connection type | Socket |
| Power transmission, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power transmission, number of pins/cores | 4 |

Technical data – Mechanical digital 8-fold input modules

| | |
|----------------------|---|
| Type of mounting | On DIN rail with accessories; with through-hole |
| Product weight | 126 g |
| Dimensions W x L x H | 30 mm x 170 mm x 35 mm |

Materials – 8-way input modules

| | |
|------------------------|--|
| Housing material | PA; PC; nickel-plated die-cast zinc |
| O-ring material | FPM |
| Note on materials | RoHS-compliant |
| LABS (PWIS) conformity | VDMA24364-B2-L |
| Cleanroom class | Element installed statically, no meaningful evaluation possible according to ISO 14644-1 |


Operating and environmental conditions – Digital 8-way input modules

| | |
|--|------------------------------|
| Ambient temperature | -20 ... 50 °C |
| Storage temperature | -40 ... 70 °C |
| Corrosion resistance class CRC ¹⁾ | 1 - Low corrosion stress |
| Relative humidity | 5 - 95%, non-condensing |
| CE marking (see declaration of conformity) ²⁾ | To EU EMC Directive |
| UKCA marking (see declaration of conformity) ³⁾ | To UK EMC regulations |
| KC marking | KC EMC |
| Certification | RCM c UL us - Listed (OL) |
| Certificate-issuing authority | UL E239998 |
| Degree of protection | IP65; IP67 |
| Note on degree of protection | Unused connections sealed |

¹⁾ More information www.festo.com/x/topic/crc²⁾ More information www.festo.com/catalogue/... Support/downloads.³⁾ More information www.festo.com/catalogue/... Support/downloads.


Technical data – Digital 8-way input modules

Connection and display components

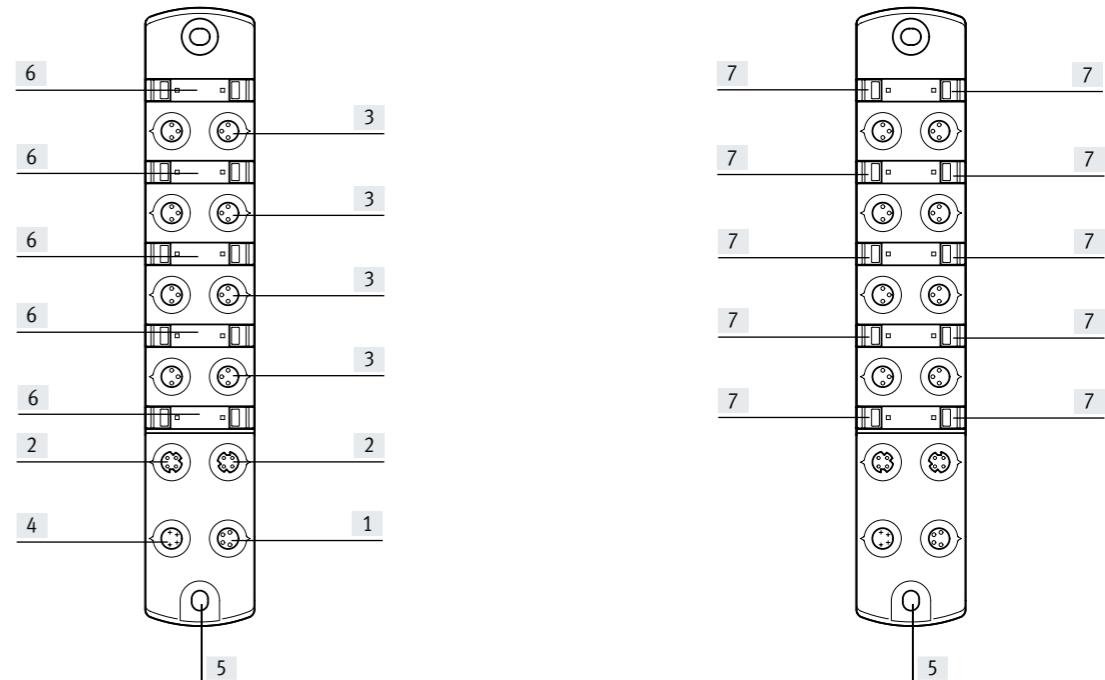[1] Electrical connection, power transmission
[2] Communication interface[3] Electrical connection, inputs
[4] Electrical connection, power supply
[5] Earth connection[6] Space for inscription label
[7] LED indicators

Technical data – Digital 8-way input modules

Dimensions - CPX-AP-I-8DI-M8-3P

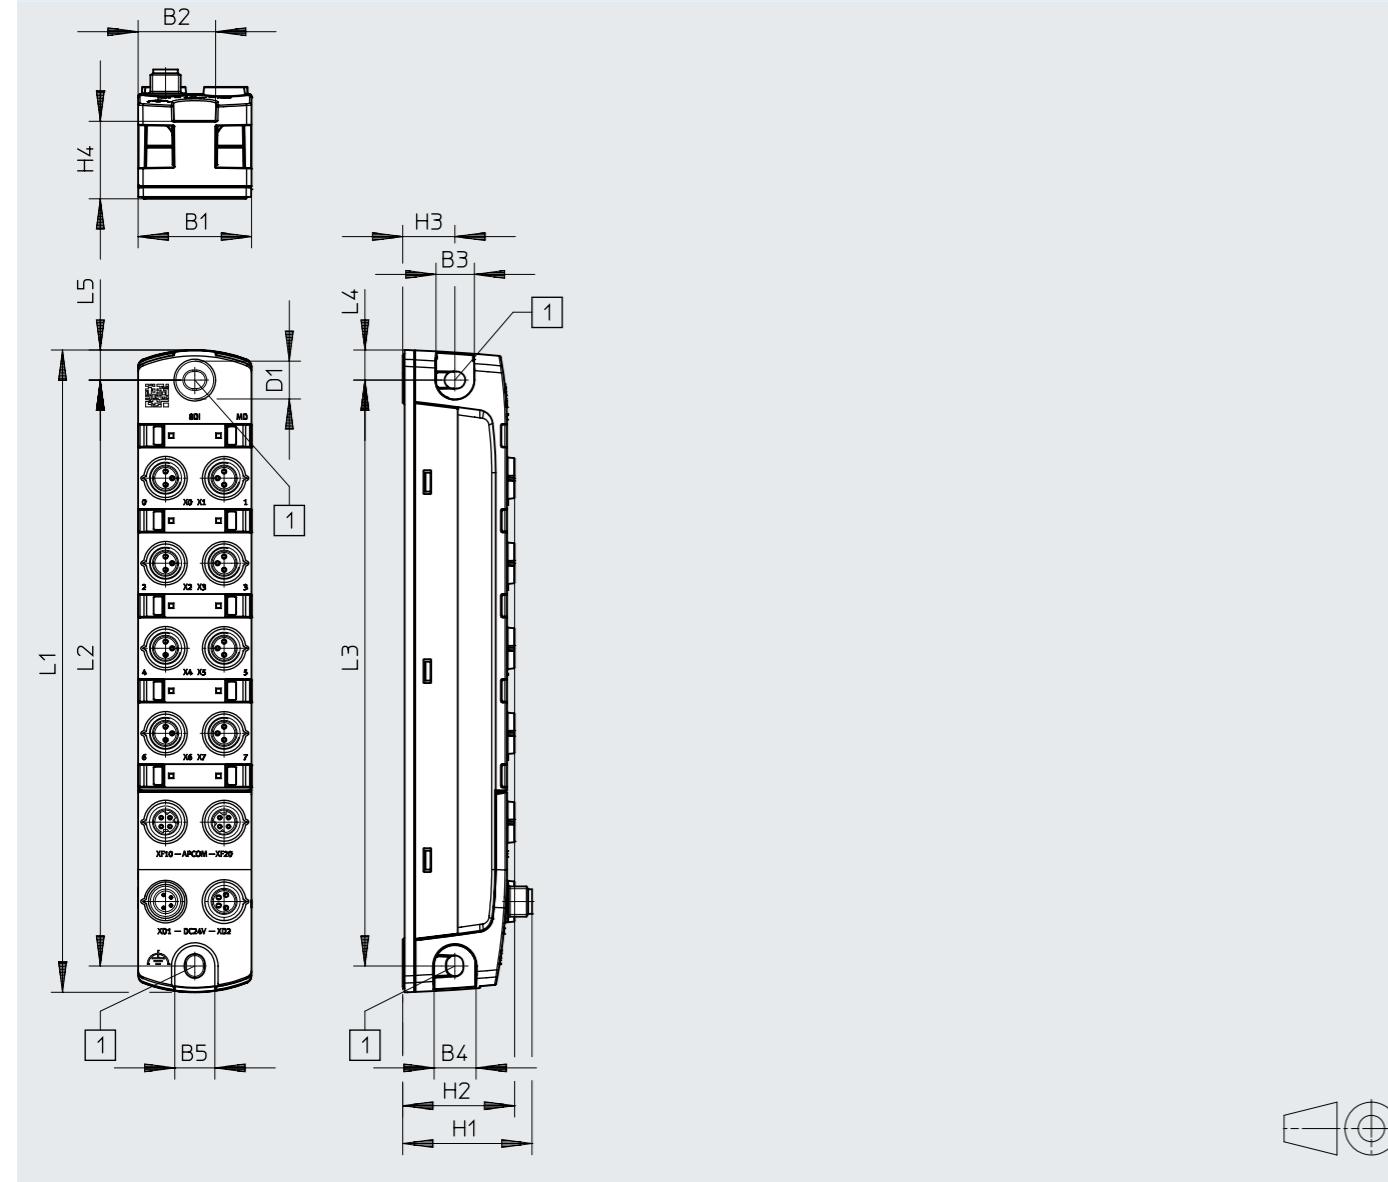


[1] Mounting hole for M4 screws

| | B1 | B2 | B3 | B4 | B5 | D1 ∅ | H1 | H2 | H3 | H4 | L1 | L2 | L3 | L4 | L5 |
|--------------------|----|------|----|----|----|---------|------|------|------|------|-----|-----|-----|----|----|
| CPX-AP-I-8DI-M8-3P | 30 | 20.5 | 10 | 11 | 11 | 10 | 34.2 | 29.6 | 13.8 | 20.5 | 170 | 155 | 155 | 8 | 8 |

Technical data – Digital 8-way input modules



Dimensions - CPX-AP-I-8DI-M12-5P

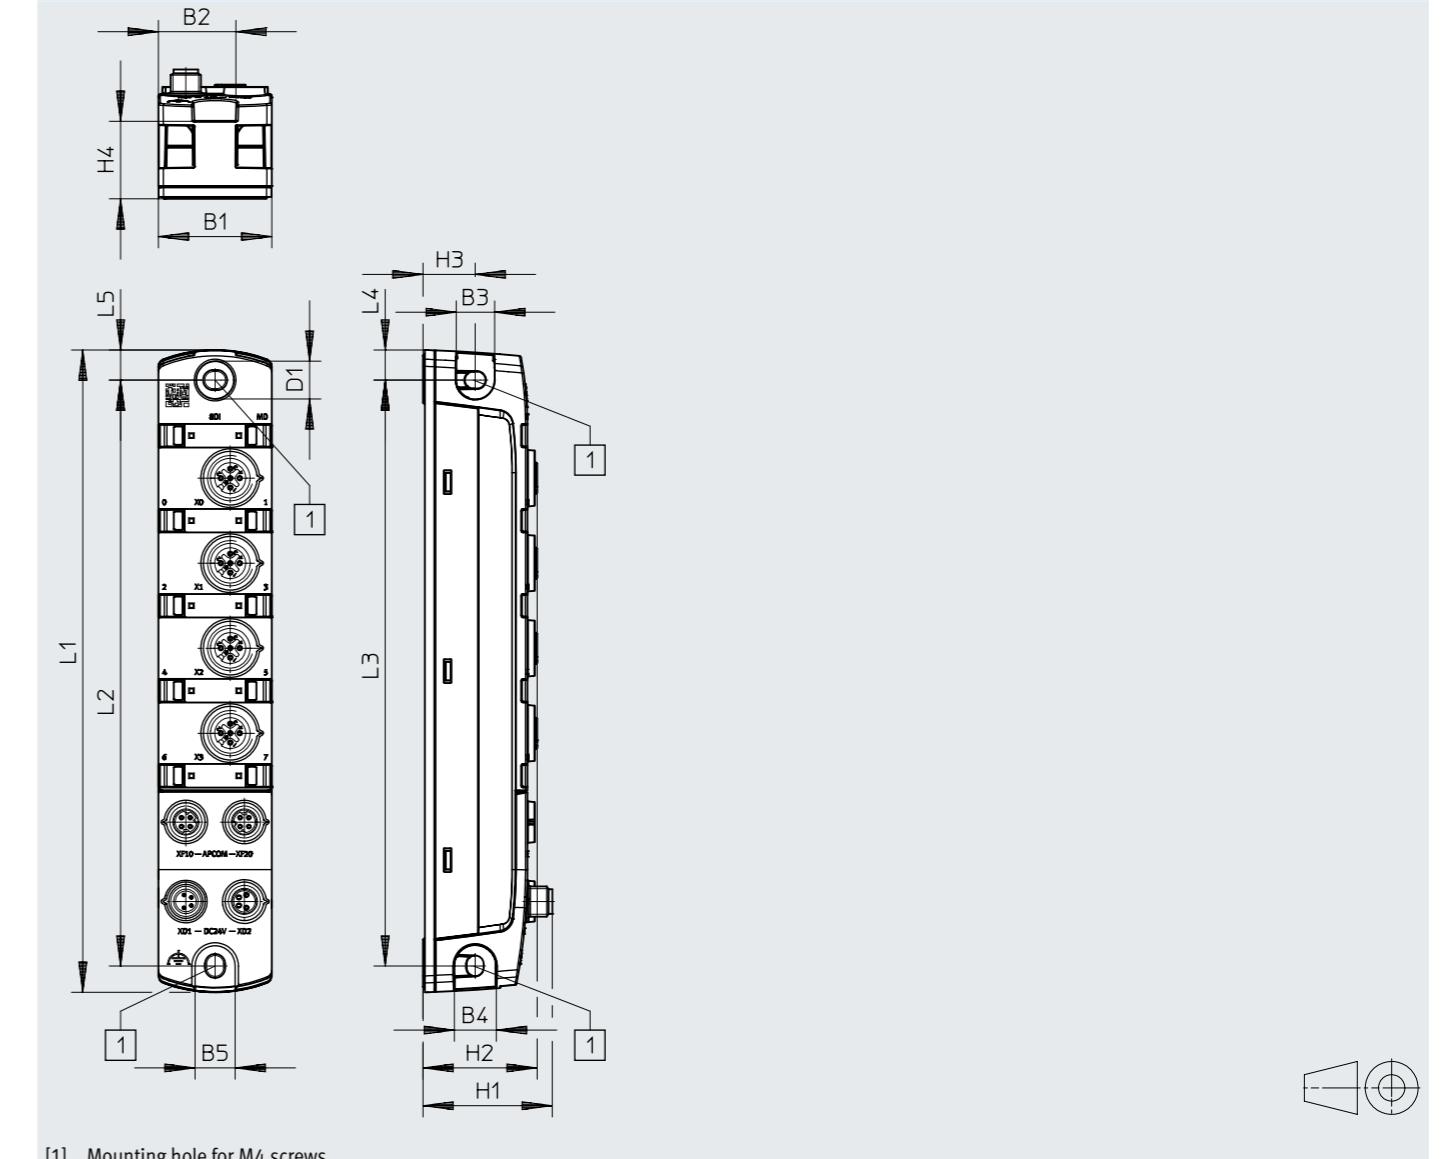


[1] Mounting hole for M4 screws

| | B1 | B2 | B3 | B4 | B5 | D1 ∅ | H1 | H2 | H3 | H4 | L1 | L2 | L3 | L4 | L5 |
|---------------------|----|------|----|----|----|---------|------|------|------|------|-----|-----|-----|----|----|
| CPX-AP-I-8DI-M12-5P | 30 | 20.5 | 10 | 11 | 11 | 10 | 34.2 | 30.2 | 13.8 | 20.5 | 170 | 155 | 155 | 8 | 8 |

Technical data – Digital 8-way input modules

| Ordering data | | | Part no. | Type |
|--|-----------------------------|--|---------------------------------------|--|
|  | Digital input module | Electrical connection input 8x socket, 3-pin, M8x1 | 8086600 | CPX-AP-I-8DI-M8-3P |
| | | | 8086602 | CPX-AP-I-8DI-M12-5P |
| Ordering data – Accessories | | | | |
| Description | | Part no. | Type | |
| Plug connectors for self-assembly | | | | |
|  | For inputs | Straight plug, M8x1, 3-pin, A-coded | Screw terminal | 8162298 NECB-S-M8G3-C2 |
| | | Straight plug, M12x1, 5-pin, A-coded | Screw terminal | 8162296 NECB-S-M12G5-C2 |
| Connecting cable | | | | |
|  | For inputs | Straight plug, M8x1, 3-pin, A-coded | Straight socket, M8x1, 3-pin, A-coded | 0.5 m 8078282 NEBA-M8G3-U-0.5-N-M8G3 |
| | | | | 1.0 m 8078283 NEBA-M8G3-U-1-N-M8G3 |
| | | | | 1.5 m 8078284 NEBA-M8G3-U-1.5-N-M8G3 |
| | | | | 2.5 m 8078286 NEBA-M8G3-U-2.5-N-M8G3 |
| | | | | 5.0 m 8078287 NEBA-M8G3-U-5-N-M8G3 |
| | | | | 10.0 m 8078288 NEBA-M8G3-U-10-N-M8G3 |
| | | | | 5.0 m 574321 NEBU-M12G5-E-5-Q8N-M12G5 |
| | | | | 7.5 m 574322 NEBU-M12G5-E-7.5-Q8N-M12G5 |
| | | | | 0.3 m 8082902 NEBC-D8G4-ES-0.3-N-S-D8G4-ET |
| | | | | 0.5 m 8065123 NEBC-D8G4-ES-0.5-N-S-D8G4-ET |
|  | For communication interface | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 1.0 m 8065125 NEBC-D8G4-ES-1-N-S-D8G4-ET |
| | | | | 2.0 m 8065127 NEBC-D8G4-ES-2-N-S-D8G4-ET |
| | | | | 5.0 m 8065129 NEBC-D8G4-ES-5-N-S-D8G4-ET |
| | | | | 7.5 m 8065131 NEBC-D8G4-ES-7.5-N-S-D8G4-ET |
| | | | | 10.0 m 8065133 NEBC-D8G4-ES-10-N-S-D8G4-ET |
| | | | | 15.0 m 8065135 NEBC-D8G4-ES-15-N-S-D8G4-ET |
| | | | | 20.0 m 8146031 NEBC-D8G4-ES-20-N-S-D8G4-ET |
| | | | | 25.0 m 8146032 NEBC-D8G4-ES-25-N-S-D8G4-ET |
| | | | | 30.0 m 8146033 NEBC-D8G4-ES-30-N-S-D8G4-ET |
| | | | | 40.0 m 8146034 NEBC-D8G4-ES-40-N-S-D8G4-ET |
| | | | | 50.0 m 8146035 NEBC-D8G4-ES-50-N-S-D8G4-ET |

Technical data – Digital 8-way input modules

| Ordering data – Accessories | | Description | Part no. | Type |
|---|-----------------------------|---------------------------------------|-------------------------------------|--|
| Connecting cable | | | | |
|  | For communication interface | Angled plug, M8x1, 4-pin, D-coded | Angled plug, M8x1, 4-pin, D-coded | 0.5 m 8065124 NEBC-D8W4-ES-0.5-N-S-D8W4-ET |
| | | | | 1.0 m 8065126 NEBC-D8W4-ES-1-N-S-D8W4-ET |
| | | | | 2.0 m 8065128 NEBC-D8W4-ES-2-N-S-D8W4-ET |
| | | | | 5.0 m 8065130 NEBC-D8W4-ES-5-N-S-D8W4-ET |
| | | | | 7.5 m 8065132 NEBC-D8W4-ES-7.5-N-S-D8W4-ET |
| | | | | 10.0 m 8065134 NEBC-D8W4-ES-10-N-S-D8W4-ET |
| | | | | 15.0 m 8065136 NEBC-D8W4-ES-15-N-S-D8W4-ET |
| | | | | 20.0 m 8146036 NEBC-D8W4-ES-20-N-S-D8W4-ET |
| | | | | 25.0 m 8146037 NEBC-D8W4-ES-25-N-S-D8W4-ET |
| | | | | 30.0 m 8146038 NEBC-D8W4-ES-30-N-S-D8W4-ET |
|  | For power supply | Straight socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 40.0 m 8146039 NEBC-D8W4-ES-40-N-S-D8W4-ET |
| | | | | 50.0 m 8146040 NEBC-D8W4-ES-50-N-S-D8W4-ET |
| | | | | 5.0 m 8065110 NEBL-M8G4-E-5-N-LE4 |
| | | | | 7.5 m 8065113 NEBL-M8G4-E-7.5-N-LE4 |
| | | | | 10.0 m 8065117 NEBL-M8G4-E-10-N-LE4 |
|  | For power transmission | Angled socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 15.0 m 8065121 NEBL-M8G4-E-15-N-LE4 |
| | | | | 7.5 m 8065114 NEBL-M8W4-E-7.5-N-LE4 |
| | | | | 10.0 m 8065118 NEBL-M8W4-E-10-N-LE4 |
| | | | | 15.0 m 8065122 NEBL-M8W4-E-15-N-LE4 |
| | | | | 0.3 m 8082904 NEBL-M8G4-E-0.3-N-M8G4 |
|  | | Straight socket, M8x1, 4-pin, A-coded | Straight plug, M8x1, 4-pin, A-coded | 0.5 m 8065102 NEBL-M8G4-E-0.5-N-M8G4 |
| | | | | 1.0 m 8065104 NEBL-M8G4-E-1-N-M8G4 |
| | | | | 2.0 m 8065106 NEBL-M8G4-E-2-N-M8G4 |
| | | | | 5.0 m 8065108 NEBL-M8G4-E-5-N-M8G4 |
| | | | | 7.5 m 8065111 NEBL-M8G4-E-7.5-N-M8G4 |
| | | | | 10.0 m 8065115 NEBL-M8G4-E-10-N-M8G4 |
| | | | | 15.0 m 8065119 NEBL-M8G4-E-15-N-M8G4 |
| | | | | 0.3 m 8146577 NEBL-M8W4-E-0.3-N-M8W4 |
|  | | Angled socket, M8x1, 4-pin, A-coded | Angled plug, M8x1, 4-pin, A-coded | 0.5 m 8065103 NEBL-M8W4-E-0.5-N-M8W4 |
| | | | | 1.0 m 8065105 NEBL-M8W4-E-1-N-M8W4 |
| | | | | 2.0 m 8065107 NEBL-M8W4-E-2-N-M8W4 |
| | | | | 5.0 m 8065109 NEBL-M8W4-E-5-N-M8W4 |
| | | | | 7.5 m 8065112 NEBL-M8W4-E-7.5-N-M8W4 |
| | | | | 10.0 m 8065116 NEBL-M8W4-E-10-N-M8W4 |
| | | | | 15.0 m 8065120 NEBL-M8W4-E-15-N-M8W4 |

Technical data – Digital 8-way input modules


| Ordering data – Accessories | | | | | |
|--|--|--|---|------------------|---|
| | Description | | Part no. | Type | |
| Distributor | | | | | |
|  | For inputs | Straight plug, M12x1, 4-pin, A-coded | 2x straight socket, M8x1, 3-pin, A-coded | – | 8005311 NEDY-L2R1-V1-M8G3-N-M12G4 |
|  | | | 2x straight socket, M12x1, 5-pin, A-coded | – | 8005310 NEDY-L2R1-V1-M12G5-N-M12G4 |
|  | | | 2x straight socket, M8x1, 3-pin, A-coded | 2.5 m | 8005301 NEDY-L2R1-V1-M8G3-U-M12G4-2.5R |
|  | | | | 5.0 m | 8005302 NEDY-L2R1-V1-M8G3-U-M12G4-5R |
|  | | | | 0.3 m | 8032309 NEDY-L2R1-V1-M8G3-U-0.3L-M12G4-2.5R |
|  | | | | 2.5 m | 8035484 NEDY-L2R1-V1-M8G3-U-0.3L-M12G4-5R |
|  | | | 2x straight socket, M12x1, 5-pin, A-coded | 2.5 m | 8005305 NEDY-L2R1-V1-M12G5-U-M12G4-2.5R |
|  | | | | 5.0 m | 8005306 NEDY-L2R1-V1-M12G5-U-M12G4-5R |
|  | | | | 0.3 m | 8035775 NEDY-L2R1-V1-M12G5-U-0.3L-M12G4-2.5R |
|  | | | | 2.5 m | 8035776 NEDY-L2R1-V1-M12G5-U-0.3L-M12G4-5R |
| Ordering data – Accessories | | | | | |
| | Description | Pack size | Part no. | Type | |
| Inscription labels | | | | | |
|  | For modules CPX-AP-I | Size 6x 12.5 mm, 10 frames with 24 pieces each | 240 | 8087174 | ASLR-L-X4-612-P240 |
| Cover cap | | | | | |
|  | For sealing unused connections | For connection M8x1 | 10 | 177672 | ISK-M8 |
| | | For connection M12x1 | 10 | 165592 | ISK-M12 |
| DIN rail mounting | | | | | |
|  | For mounting a module on DIN rails according to EN 60715 | – | 8095158 | CAFM-X4-H | |

Datasheet – Analogue input modules

Function

Analogue input modules make it possible to detect 4 analogue input signals. All 4 channels can be set separately to measure current, voltage, temperature or resistance.

- Input modules for 24 V DC operating voltage
- Connection M12x1, 5-pin
- Status and error indication via LED

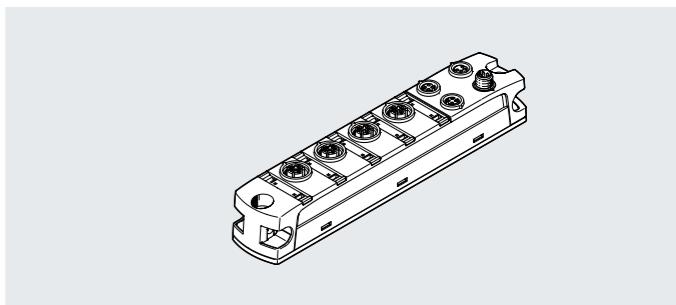**General technical – Data analogue input modules**

| | |
|--|--|
| Number of inputs | 4 |
| Electrical connection, input, function | Analogue input |
| Electrical connection, input, connection type | 4x socket |
| Electrical connection, input, connection technology | M12x1, A-coded to EN 61076-2-101 |
| Electrical connection, input, note on connection technology | To achieve the technical specifications, the opposite side must be screened and designed with gold contact surfaces. |
| Electrical connection, input, number of pins/cores | 5 |
| Fuse protection inputs (short circuit) | Internal electronic fuse per module |
| Signal range | -10 - 10 V; -5 - 5 V; 0 - 10 V; 1 - 5 V; 0 - 20 mA; 4 - 20 mA; 0 - 500 Ohm |
| Data format | 15 bit + prefix; linear scaling |
| Measured variable | Voltage; current; temperature; resistance |
| Note on the measured variable | Temperature: PT100 and NI100 supported |
| Repetition accuracy | ±0.025% at 25 °C |
| Operating error limit related to the ambient temperature range | ±0.15% for voltage; ±0.15% for current; ±0.9% for temperature; ±0.35% for resistance |
| Basic error limit at 25 °C | ±0.1% for voltage; ±0.1% for current; ±0.4% for temperature; ±0.2% for resistance |
| Communication interface, protocol | AP |
| Communication interface, function | System communication XF10 IN / XF20 OUT |
| Communication interface, connection type | 2 x socket |
| Communication interface, connection technology | M8x1, D-coded to EN 61076-2-114 |
| Communication interface, number of pins/cores | 4 |
| Communication interface, shielding | Yes |

General data – Analogue input modules

| | |
|--|---|
| Diagnostics via LED | Diagnostics per module Status per channel |
| Diagnostics via internal communication | Wire break Module error Short circuit/overload in sensor supply Parameter error Parameterisation error Overload at analogue inputs Upper limit value not observed Underflow/overflow Lower limit value not observed |
| Max. cable length | 30 m inputs 50 m system communication |
| Reverse polarity protection | Yes |

Datasheet – Analogue input modules

Technical data – Electrical – Analogue input modules

| | |
|---|--|
| Nominal operating voltage DC for electronics/sensors | 24 V |
| Permissible voltage fluctuations, electronics/sensors | ± 25% |
| Note on the operating voltage | SELV/PELV power supply units required; note voltage drop |
| Power failure buffering | 10 ms |
| Max. power supply | 2 x 4 A (external fuse required) |
| Max. total current of inputs per module | 1 A |
| Intrinsic current consumption at nominal operating voltage, electronics/sensors | Typical 38 mA |
| Power supply, function | Incoming electronics/sensors and load |
| Power supply, connection type | Plug |
| Power supply, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power supply, number of pins/cores | 4 |
| Power transmission, function | Outgoing electronics/sensors and load |
| Power transmission, connection type | Socket |
| Power transmission, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power transmission, number of pins/cores | 4 |

Technical data – Mechanical – Analogue input modules

| | |
|----------------------|---|
| Type of mounting | On DIN rail with accessories; with through-hole |
| Product weight | 166 g |
| Dimensions W x L x H | 30 mm x 170 mm x 35 mm |

Materials – Analogue input modules

| | |
|------------------------|--|
| Housing material | PA; PC; nickel-plated die-cast zinc |
| Sealing material | NBR |
| O-ring material | FPM |
| Note on materials | RoHS-compliant |
| LABS (PWIS) conformity | VDMA24364-B2-L |
| Cleanroom class | Element installed statically, no meaningful evaluation possible according to ISO 14644-1 |


Operating and ambient conditions – Analogue input modules

| | |
|--|------------------------------|
| Ambient temperature | -20 ... 50 °C |
| Storage temperature | -40 ... 70 °C |
| Corrosion resistance class CRC ¹⁾ | 1 - Low corrosion stress |
| Relative humidity | 5 - 95%, non-condensing |
| CE marking (see declaration of conformity) ²⁾ | To EU EMC Directive |
| UKCA marking (see declaration of conformity) ³⁾ | To UK EMC regulations |
| KC marking | KC EMC |
| Certification | RCM c UL us - Listed (OL) |
| Certificate-issuing authority | UL E239998 |
| Degree of protection | IP65; IP67 |
| Note on degree of protection | Unused connections sealed |

¹⁾ More information www.festo.com/x/topic/crc²⁾ More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) Support/downloads.³⁾ More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) Support/downloads.

Datasheet – Analogue input modules

Connection and display components

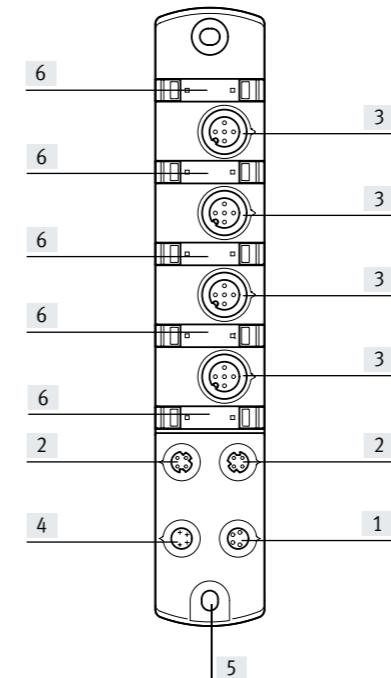


[1] Electrical connection, power transmission
[2] Communication interface


[3] Electrical connection, inputs
[4] Electrical connection, power supply

[5] Earth connection
[6] Space for inscription label

[7] LED indicators

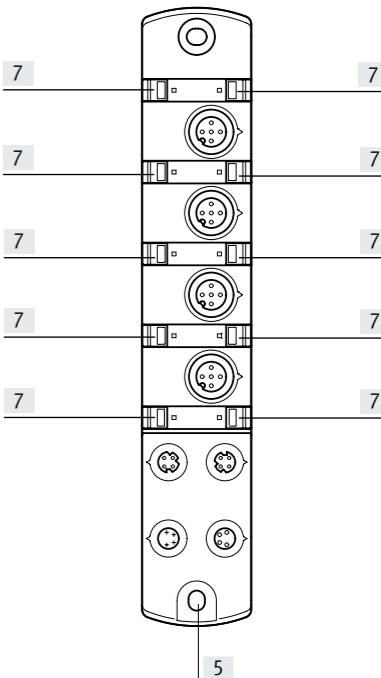

Datasheet – Analogue input modules

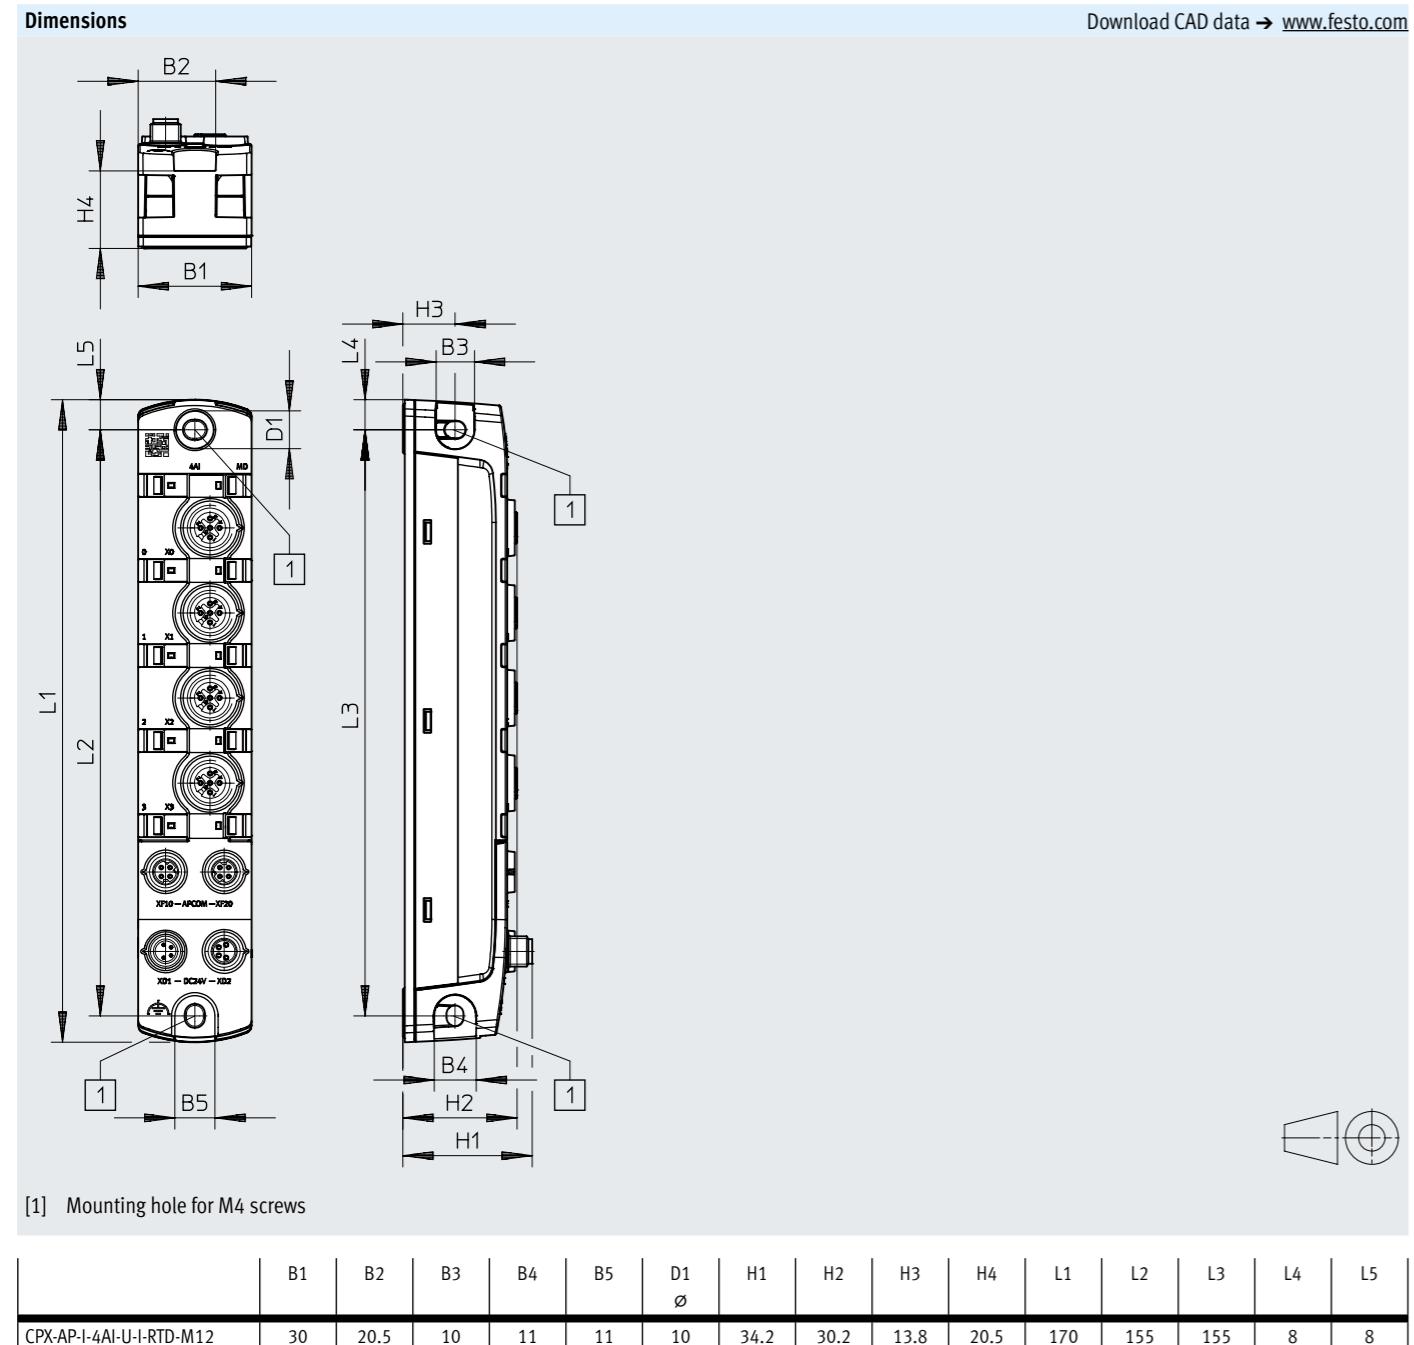

Datasheet – Analogue input modules

Ordering data

| | | | Part no. | Type |
|--|-----------------------|---|---------------|---------------------------------|
| | Analogue input module | Electrical connection input 4x socket, 5-pin, M12x1 | 808606 | CPX-AP-I-4AI-U-I-RTD-M12 |

Ordering data – Accessories

| Description | Part no. | Type | | | |
|-------------------------------------|---------------------------------------|-------------------------------------|--------|----------------|------------------------------|
| Connecting cable | | | | | |
| For communication interface | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 0.3 m | 8082902 | NEBC-D8G4-ES-0.3-N-S-D8G4-ET |
| | | | 0.5 m | 8065123 | NEBC-D8G4-ES-0.5-N-S-D8G4-ET |
| | | | 1.0 m | 8065125 | NEBC-D8G4-ES-1-N-S-D8G4-ET |
| | | | 2.0 m | 8065127 | NEBC-D8G4-ES-2-N-S-D8G4-ET |
| | | | 5.0 m | 8065129 | NEBC-D8G4-ES-5-N-S-D8G4-ET |
| | | | 7.5 m | 8065131 | NEBC-D8G4-ES-7.5-N-S-D8G4-ET |
| | | | 10.0 m | 8065133 | NEBC-D8G4-ES-10-N-S-D8G4-ET |
| | | | 15.0 m | 8065135 | NEBC-D8G4-ES-15-N-S-D8G4-ET |
| | | | 20.0 m | 8146031 | NEBC-D8G4-ES-20-N-S-D8G4-ET |
| | | | 25.0 m | 8146032 | NEBC-D8G4-ES-25-N-S-D8G4-ET |
| | | | 30.0 m | 8146033 | NEBC-D8G4-ES-30-N-S-D8G4-ET |
| | | | 40.0 m | 8146034 | NEBC-D8G4-ES-40-N-S-D8G4-ET |
| | | | 50.0 m | 8146035 | NEBC-D8G4-ES-50-N-S-D8G4-ET |
| Angled plug, M8x1, 4-pin, D-coded | Angled plug, M8x1, 4-pin, D-coded | Angled plug, M8x1, 4-pin, D-coded | 0.5 m | 8065124 | NEBC-D8W4-ES-0.5-N-S-D8W4-ET |
| | | | 1.0 m | 8065126 | NEBC-D8W4-ES-1-N-S-D8W4-ET |
| | | | 2.0 m | 8065128 | NEBC-D8W4-ES-2-N-S-D8W4-ET |
| | | | 5.0 m | 8065130 | NEBC-D8W4-ES-5-N-S-D8W4-ET |
| | | | 7.5 m | 8065132 | NEBC-D8W4-ES-7.5-N-S-D8W4-ET |
| | | | 10.0 m | 8065134 | NEBC-D8W4-ES-10-N-S-D8W4-ET |
| | | | 15.0 m | 8065136 | NEBC-D8W4-ES-15-N-S-D8W4-ET |
| | | | 20.0 m | 8146036 | NEBC-D8W4-ES-20-N-S-D8W4-ET |
| | | | 25.0 m | 8146037 | NEBC-D8W4-ES-25-N-S-D8W4-ET |
| | | | 30.0 m | 8146038 | NEBC-D8W4-ES-30-N-S-D8W4-ET |
| | | | 40.0 m | 8146039 | NEBC-D8W4-ES-40-N-S-D8W4-ET |
| | | | 50.0 m | 8146040 | NEBC-D8W4-ES-50-N-S-D8W4-ET |
| For power supply | Straight socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 5.0 m | 8065110 | NEBL-M8G4-E-5-N-LE4 |
| | | | 7.5 m | 8065113 | NEBL-M8G4-E-7.5-N-LE4 |
| | | | 10.0 m | 8065117 | NEBL-M8G4-E-10-N-LE4 |
| | | | 15.0 m | 8065121 | NEBL-M8G4-E-15-N-LE4 |
| Angled socket, M8x1, 4-pin, A-coded | Angled socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 7.5 m | 8065114 | NEBL-M8W4-E-7.5-N-LE4 |
| | | | 10.0 m | 8065118 | NEBL-M8W4-E-10-N-LE4 |
| | | | 15.0 m | 8065122 | NEBL-M8W4-E-15-N-LE4 |
| For power transmission | Straight socket, M8x1, 4-pin, A-coded | Straight plug, M8x1, 4-pin, A-coded | 0.3 m | 8082904 | NEBL-M8G4-E-0.3-N-M8G4 |
| | | | 0.5 m | 8065102 | NEBL-M8G4-E-0.5-N-M8G4 |
| | | | 1.0 m | 8065104 | NEBL-M8G4-E-1-N-M8G4 |
| | | | 2.0 m | 8065106 | NEBL-M8G4-E-2-N-M8G4 |
| | | | 5.0 m | 8065108 | NEBL-M8G4-E-5-N-M8G4 |
| | | | 7.5 m | 8065111 | NEBL-M8G4-E-7.5-N-M8G4 |
| | | | 10.0 m | 8065115 | NEBL-M8G4-E-10-N-M8G4 |
| | | | 15.0 m | 8065119 | NEBL-M8G4-E-15-N-M8G4 |
| Angled socket, M8x1, 4-pin, A-coded | Angled socket, M8x1, 4-pin, A-coded | Angled plug, M8x1, 4-pin, A-coded | 0.3 m | 8146577 | NEBL-M8W4-E-0.3-N-M8W4 |
| | | | 0.5 m | 8065103 | NEBL-M8W4-E-0.5-N-M8W4 |
| | | | 1.0 m | 8065105 | NEBL-M8W4-E-1-N-M8W4 |
| | | | 2.0 m | 8065107 | NEBL-M8W4-E-2-N-M8W4 |
| | | | 5.0 m | 8065109 | NEBL-M8W4-E-5-N-M8W4 |
| | | | 7.5 m | 8065112 | NEBL-M8W4-E-7.5-N-M8W4 |
| | | | 10.0 m | 8065116 | NEBL-M8W4-E-10-N-M8W4 |
| | | | 15.0 m | 8065120 | NEBL-M8W4-E-15-N-M8W4 |


Datasheet – Analogue input modules

| Ordering data – Accessories | | Description | | | Pack size | Part no. | Type |
|--|--|--|---------|------------|--------------------|----------|------|
| Inscription labels | | | | | | | |
|  | For modules CPX-AP-I | Size 6x 12.5 mm, 10 frames with 24 pieces each | 240 | 8087174 | ASLR-L-X4-612-P240 | | |
| Cover cap | | | | | | | |
|  | For sealing unused connections | For connection M8x1 | 10 | 177672 | ISK-M8 | | |
| | | For connection M12x1 | 10 | 165592 | ISK-M12 | | |
| DIN rail mounting | | | | | | | |
|  | For mounting a module on DIN rails according to EN 60715 | - | 8095158 | CAF-M-X4-H | | | |

Datasheet – Digital 8-way output modules

Function
Digital output modules make it possible to connect electrical consumers according to IEC 1131-2 type 0.5 (valves, contactors or display components) with an operating voltage of 24 V DC. Status and error messages can be shown by LED indicators on the module. The module response can be set using parameters.

- Output modules for 24 V DC operating voltage
- Connection M8x1 3-pin or M12x1 5-pin
- Status and error indication via LED

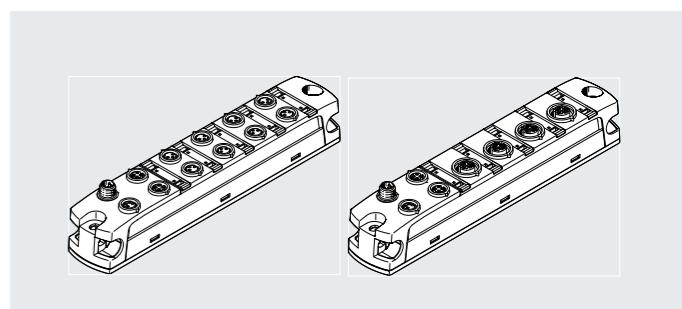

General technical data – Digital 8-way input/output modules

| | |
|--|--|
| Number of outputs | 8 |
| Electrical connection, output, function | Digital output |
| Electrical connection, output, connection type | 4x socket; 8x socket |
| Electrical connection, output, connection technology | M8x1, A-coded to EN 61076-2-104; M12x1 A-coded to EN 61076-2-101 |
| Electrical connection, output, number of pins/cores | 3; 5 |
| Switching logic at outputs | PNP (positive switching) |
| Characteristic curve of outputs | To IEC 61131-2, type 0.5 |
| Output delay with resistive load | Signal change 0->1: < 200 µs; signal change 1->0: < 200 µs |
| Fuse protection outputs (short circuit) | Internal electronic fuse per channel |
| Communication interface, protocol | AP |
| Communication interface, function | System communication XF10 IN / XF20 OUT |
| Communication interface, connection type | 2 x socket |
| Communication interface, connection technology | M8x1, D-coded to EN 61076-2-114 |
| Communication interface, number of pins/cores | 4 |
| Communication interface, shielding | Yes |

General data – Digital 8-way input/output modules

| | |
|--|---|
| Electrical isolation of outputs between channels | No |
| Electrical isolation of outputs between channel - internal communication | Yes |
| Diagnostics via LED | Diagnostics per module Power supply load Status per channel |
| Diagnostics via internal communication | Load switch-off Short circuit/overload output signal Electronics/sensors overvoltage Load overvoltage Electronics/sensors undervoltage Undervoltage load |
| Max. cable length | 30 m outputs 50 m system communication |
| Note on max. cable length | Power supply according to nominal voltage |
| Reverse polarity protection | Yes |

Datasheet – Digital 8-way output modules

Technical data – Electrical – Digital 8-way input/output modules

| | |
|---|--|
| Nominal operating voltage DC for electronics/sensors | 24 V |
| Nominal operating voltage DC load | 24 V |
| Permissible voltage fluctuations, electronics/sensors | ± 25% |
| Permissible voltage fluctuations, load | ± 25% |
| Note on the operating voltage | SELV/PELV power supply units required; note voltage drop |
| Power failure buffering | 10 ms |
| Max. power supply | 2 x 4 A (external fuse required) |
| Max. power supply per channel | 0.5 A |
| Max. residual current outputs per module | 4 A |
| Intrinsic current consumption at nominal operating voltage, electronics/sensors | Typical 35 mA |
| Intrinsic current consumption at nominal operating voltage, load | Typical 10 mA |
| Power supply, function | Incoming electronics/sensors and load |
| Power supply, connection type | Plug |
| Power supply, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power supply, number of pins/cores | 4 |
| Power transmission, function | Outgoing electronics/sensors and load |
| Power transmission, connection type | Socket |
| Power transmission, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power transmission, number of pins/cores | 4 |

Technical data – Mechanical – Digital 8-way input/output modules

| | |
|----------------------|---|
| Type of mounting | On DIN rail with accessories; with through-hole |
| Product weight | 127 g |
| Dimensions W x L x H | 30 mm x 170 mm x 35 mm |

Materials – Digital 8-way output modules

| | |
|------------------------|--|
| Housing material | PA; PC; nickel-plated die-cast zinc |
| O-ring material | FPM |
| Note on materials | RoHS-compliant |
| LABS (PWIS) conformity | VDMA24364-B2-L |
| Cleanroom class | Element installed statically, no meaningful evaluation possible according to ISO 14644-1 |


Operating and environmental conditions – Digital 8-way output modules

| | |
|--|------------------------------|
| Ambient temperature | -20 ... 50 °C |
| Storage temperature | -40 ... 70 °C |
| Corrosion resistance class CRC ¹⁾ | 1 - Low corrosion stress |
| Relative humidity | 5 - 95%, non-condensing |
| CE marking (see declaration of conformity) ²⁾ | To EU EMC Directive |
| UKCA marking (see declaration of conformity) ³⁾ | To UK EMC regulations |
| KC marking | KC EMC |
| Certification | RCM c UL us - Listed (OL) |
| Certificate-issuing authority | UL E239998 |
| Degree of protection | IP65; IP67 |
| Note on degree of protection | Unused connections sealed |

¹⁾ More information www.festo.com/x/topic/crc²⁾ More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) Support/downloads.³⁾ More information [www.festo.com/catalogue/...](http://www.festo.com/catalogue/) Support/downloads.

Datasheet – Digital 8-way output modules


Connection and display components

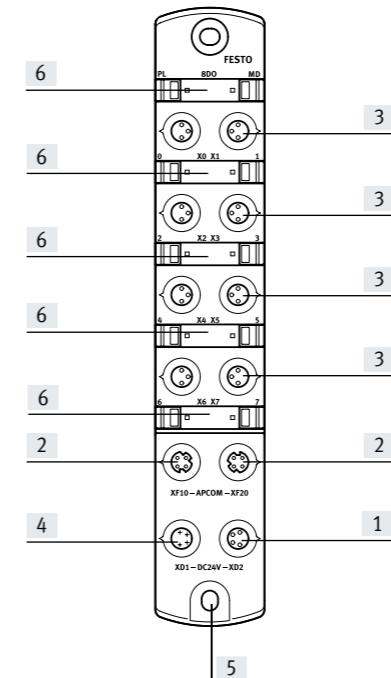

[1] Electrical connection, power transmission
[2] Communication interface

[3] Electrical connection, outputs
[4] Electrical connection, power supply


[5] Earth connection
[6] Space for inscription label

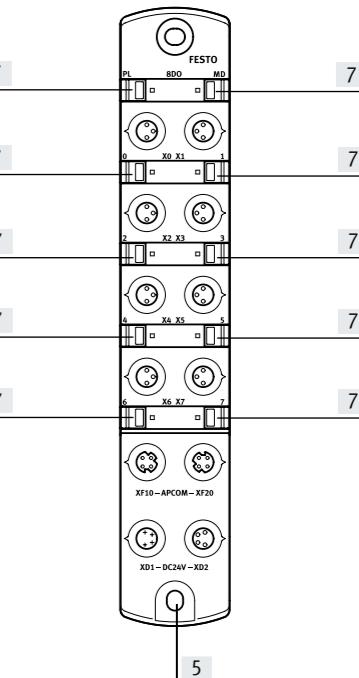

[7] LED indicators

Datasheet – Digital 8-way output modules

Dimensions – CPX-AP-I-8DO-M8-3P

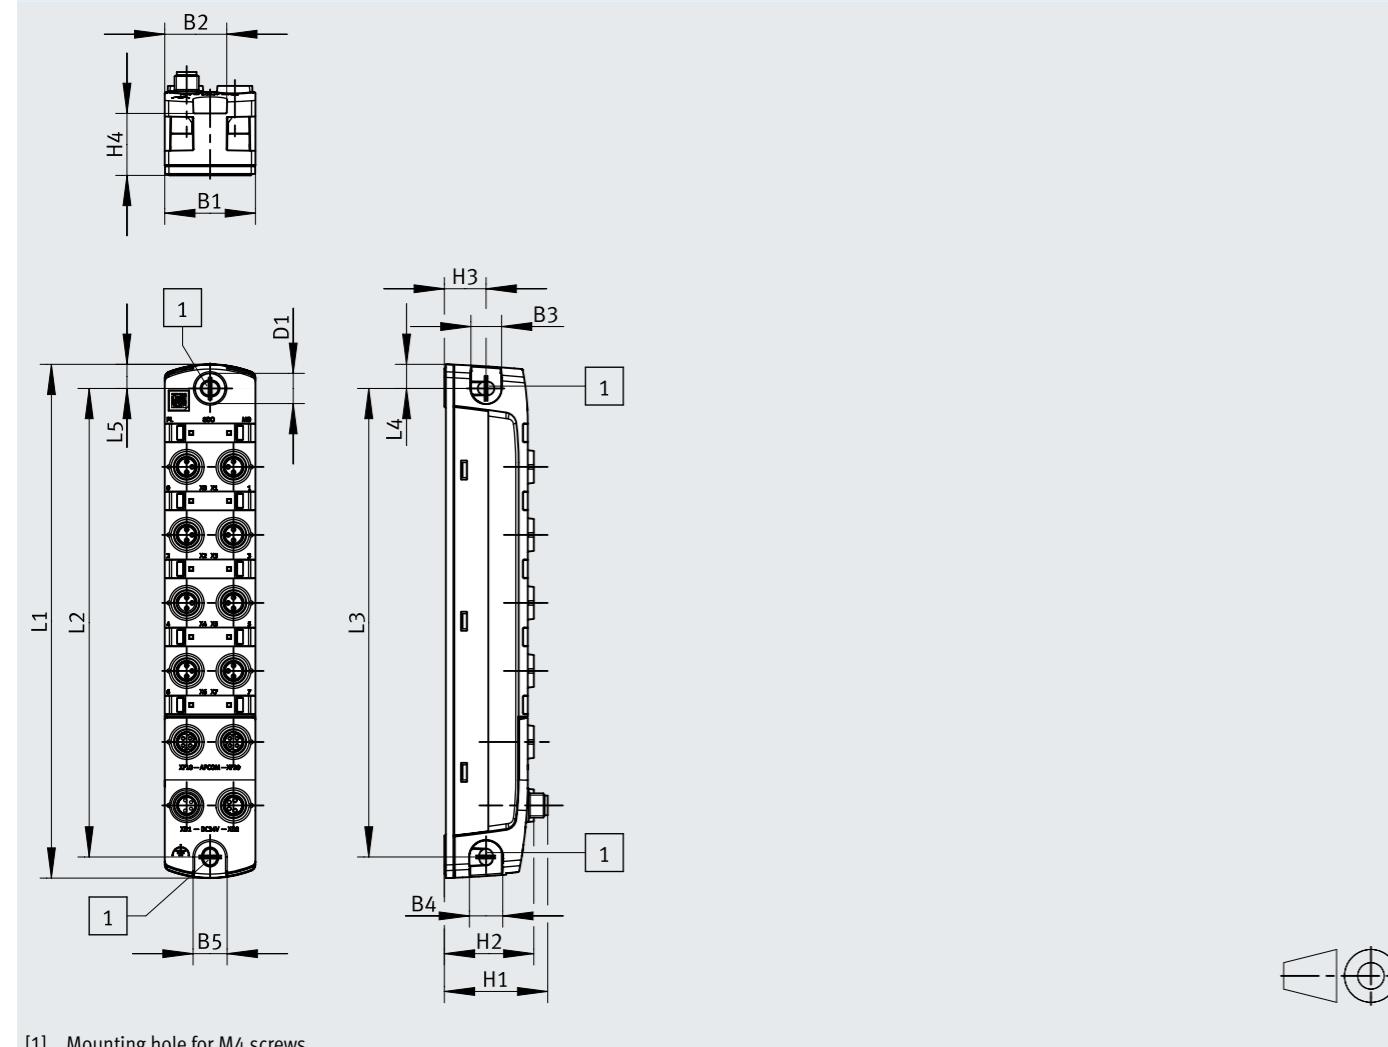


[1] Mounting hole for M4 screws

| | B1 | B2 | B3 | B4 | B5 | D1 ∅ | H1 | H2 | H3 | H4 | L1 | L2 | L3 | L4 | L5 |
|--------------------|----|------|----|----|----|---------|------|------|------|------|-----|-----|-----|----|----|
| CPX-AP-I-8DO-M8-3P | 30 | 20.5 | 10 | 11 | 11 | 10 | 34.2 | 29.6 | 13.8 | 20.5 | 170 | 155 | 155 | 8 | 8 |

Datasheet – Digital 8-way output modules



Dimensions – CPX-AP-I-8DO-M12-5P

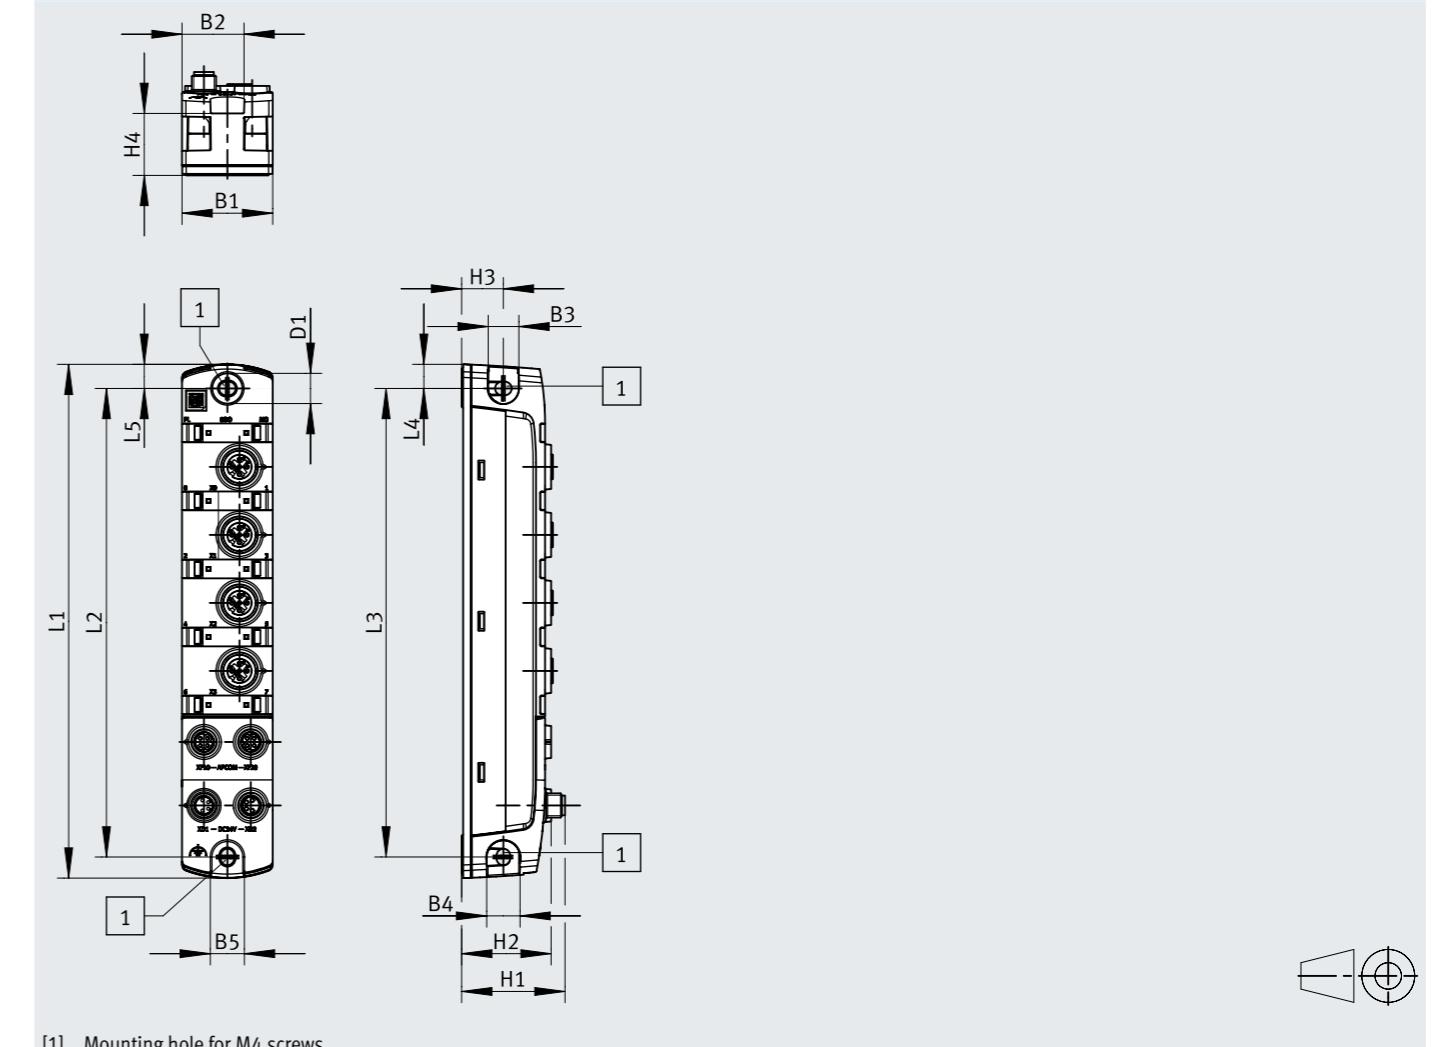


[1] Mounting hole for M4 screws

| | B1 | B2 | B3 | B4 | B5 | D1 ∅ | H1 | H2 | H3 | H4 | L1 | L2 | L3 | L4 | L5 |
|---------------------|----|------|----|----|----|---------|------|------|------|------|-----|-----|-----|----|----|
| CPX-AP-I-8DO-M12-5P | 30 | 20.5 | 10 | 11 | 11 | 10 | 34.2 | 30.2 | 13.8 | 20.5 | 170 | 155 | 155 | 8 | 8 |

Datasheet – Digital 8-way output modules

| Ordering data | | | Part no. | Type | |
|--|-----------------------------|---|---------------------------------------|--|--|
|  | Digital output module | Electrical connection output 8x socket, 3-pin, M8x1 | 8179438 | CPX-AP-I-8DO-M8-3P | |
| | | | 8179439 | CPX-AP-I-8DO-M12-5P | |
| Ordering data – Accessories | | | | | |
| Description | | Part no. | Type | | |
| Plug connectors for self-assembly | | | | | |
|  | For outputs | Straight plug, M8x1, 3-pin, A-coded | Screw terminal | 8162298 NECB-S-M8G3-C2 | |
| | | Straight plug, M12x1, 5-pin, A-coded | Screw terminal | 8162296 NECB-S-M12G5-C2 | |
| Connecting cable | | | | | |
|  | For outputs | Straight plug, M8x1, 3-pin, A-coded | Straight socket, M8x1, 3-pin, A-coded | 0.5 m 8078282 NEBA-M8G3-U-0.5-N-M8G3 | |
| | | | | 1.0 m 8078283 NEBA-M8G3-U-1-N-M8G3 | |
| | | | | 1.5 m 8078284 NEBA-M8G3-U-1.5-N-M8G3 | |
| | | | | 2.5 m 8078286 NEBA-M8G3-U-2.5-N-M8G3 | |
| | | | | 5.0 m 8078287 NEBA-M8G3-U-5-N-M8G3 | |
| | | | | 10.0 m 8078288 NEBA-M8G3-U-10-N-M8G3 | |
| | | | | 5.0 m 574321 NEBU-M12G5-E-5-Q8N-M12G5 | |
| | | | | 7.5 m 574322 NEBU-M12G5-E-7.5-Q8N-M12G5 | |
| | | | | 0.3 m 8082902 NEBC-D8G4-ES-0.3-N-S-D8G4-ET | |
| | | | | 0.5 m 8065123 NEBC-D8G4-ES-0.5-N-S-D8G4-ET | |
|  | For communication interface | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 1.0 m 8065125 NEBC-D8G4-ES-1-N-S-D8G4-ET | |
| | | | | 2.0 m 8065127 NEBC-D8G4-ES-2-N-S-D8G4-ET | |
| | | | | 5.0 m 8065129 NEBC-D8G4-ES-5-N-S-D8G4-ET | |
| | | | | 7.5 m 8065131 NEBC-D8G4-ES-7.5-N-S-D8G4-ET | |
| | | | | 10.0 m 8065133 NEBC-D8G4-ES-10-N-S-D8G4-ET | |
| | | | | 15.0 m 8065135 NEBC-D8G4-ES-15-N-S-D8G4-ET | |
| | | | | 20.0 m 8146031 NEBC-D8G4-ES-20-N-S-D8G4-ET | |
| | | | | 25.0 m 8146032 NEBC-D8G4-ES-25-N-S-D8G4-ET | |
| | | | | 30.0 m 8146033 NEBC-D8G4-ES-30-N-S-D8G4-ET | |
| | | | | 40.0 m 8146034 NEBC-D8G4-ES-40-N-S-D8G4-ET | |
| | | | | 50.0 m 8146035 NEBC-D8G4-ES-50-N-S-D8G4-ET | |

Datasheet – Digital 8-way output modules

| Ordering data – Accessories | | Description | Part no. | Type |
|---|-----------------------------|---------------------------------------|-------------------------------------|--|
| Connecting cable | | | | |
|  | For communication interface | Angled plug, M8x1, 4-pin, D-coded | Angled plug, M8x1, 4-pin, D-coded | 0.5 m 8065124 NEBC-D8W4-ES-0.5-N-S-D8W4-ET |
| | | | | 1.0 m 8065126 NEBC-D8W4-ES-1-N-S-D8W4-ET |
| | | | | 2.0 m 8065128 NEBC-D8W4-ES-2-N-S-D8W4-ET |
| | | | | 5.0 m 8065130 NEBC-D8W4-ES-5-N-S-D8W4-ET |
| | | | | 7.5 m 8065132 NEBC-D8W4-ES-7.5-N-S-D8W4-ET |
| | | | | 10.0 m 8065134 NEBC-D8W4-ES-10-N-S-D8W4-ET |
| | | | | 15.0 m 8065136 NEBC-D8W4-ES-15-N-S-D8W4-ET |
| | | | | 20.0 m 8146036 NEBC-D8W4-ES-20-N-S-D8W4-ET |
| | | | | 25.0 m 8146037 NEBC-D8W4-ES-25-N-S-D8W4-ET |
| | | | | 30.0 m 8146038 NEBC-D8W4-ES-30-N-S-D8W4-ET |
|  | For power supply | Straight socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 5.0 m 8065110 NEBL-M8G4-E-5-N-LE4 |
| | | | | 7.5 m 8065113 NEBL-M8G4-E-7.5-N-LE4 |
| | | | | 10.0 m 8065117 NEBL-M8G4-E-10-N-LE4 |
| | | | | 15.0 m 8065121 NEBL-M8G4-E-15-N-LE4 |
| | | | Open cable end, 4-core | 7.5 m 8065114 NEBL-M8W4-E-7.5-N-LE4 |
| | | | | 10.0 m 8065118 NEBL-M8W4-E-10-N-LE4 |
| | | | | 15.0 m 8065122 NEBL-M8W4-E-15-N-LE4 |
|  | For power transmission | Straight socket, M8x1, 4-pin, A-coded | Straight plug, M8x1, 4-pin, A-coded | 0.3 m 8082904 NEBL-M8G4-E-0.3-N-M8G4 |
| | | | | 0.5 m 8065102 NEBL-M8G4-E-0.5-N-M8G4 |
| | | | | 1.0 m 8065104 NEBL-M8G4-E-1-N-M8G4 |
| | | | | 2.0 m 8065106 NEBL-M8G4-E-2-N-M8G4 |
| | | | | 5.0 m 8065108 NEBL-M8G4-E-5-N-M8G4 |
| | | | | 7.5 m 8065111 NEBL-M8G4-E-7.5-N-M8G4 |
| | | | Angled socket, M8x1, 4-pin, A-coded | 10.0 m 8065115 NEBL-M8G4-E-10-N-M8G4 |
| | | | | 15.0 m 8065119 NEBL-M8G4-E-15-N-M8G4 |
| | | | | 0.3 m 8146577 NEBL-M8W4-E-0.3-N-M8W4 |
| | | | | 0.5 m 8065103 NEBL-M8W4-E-0.5-N-M8W4 |
|  | | | Angled plug, M8x1, 4-pin, A-coded | 1.0 m 8065105 NEBL-M8W4-E-1-N-M8W4 |
| | | | | 2.0 m 8065107 NEBL-M8W4-E-2-N-M8W4 |
| | | | | 5.0 m 8065109 NEBL-M8W4-E-5-N-M8W4 |
| | | | | 7.5 m 8065112 NEBL-M8W4-E-7.5-N-M8W4 |
| | | | Angled socket, M8x1, 4-pin, A-coded | 10.0 m 8065116 NEBL-M8W4-E-10-N-M8W4 |
| | | | | 15.0 m 8065120 NEBL-M8W4-E-15-N-M8W4 |


Datasheet – Digital 8-way output modules

| Ordering data – Accessories | | Description | | Part no. | Type |
|-----------------------------|------------|--------------------------------------|---|----------|--|
| Distributor | | | | | |
| | For inputs | Straight plug, M12x1, 4-pin, A-coded | 2x straight socket, M8x1, 3-pin, A-coded | – | 8005311 NEDY-L2R1-V1-M8G3-N-M12G4 |
| | | | 2x straight socket, M12x1, 5-pin, A-coded | – | 8005310 NEDY-L2R1-V1-M12G5-N-M12G4 |
| | | | 2x straight socket, M8x1, 3-pin, A-coded | 2.5 m | 8005301 NEDY-L2R1-V1-M8G3-U-M12G4-2.5R |
| | | | | 5.0 m | 8005302 NEDY-L2R1-V1-M8G3-U-M12G4-5R |
| | | | | 0.3 m | 8032309 NEDY-L2R1-V1-M8G3-U-0.3L-M12G4-2.5R |
| | | | | 2.5 m | 8035484 NEDY-L2R1-V1-M8G3-U-0.3L-M12G4-5R |
| | | | 2x straight socket, M12x1, 5-pin, A-coded | 2.5 m | 8005305 NEDY-L2R1-V1-M12G5-U-M12G4-2.5R |
| | | | | 5.0 m | 8005306 NEDY-L2R1-V1-M12G5-U-M12G4-5R |
| | | | | 0.3 m | 8035775 NEDY-L2R1-V1-M12G5-U-0.3L-M12G4-2.5R |
| | | | | 2.5 m | 8035776 NEDY-L2R1-V1-M12G5-U-0.3L-M12G4-5R |

| Ordering data – Accessories | | Description | | Pack size | Part no. | Type |
|-----------------------------|--|--|---------|------------|--------------------|------|
| Inscription labels | | | | | | |
| | For modules CPX-AP-I | Size 6x 12.5 mm, 10 frames with 24 pieces each | 240 | 8087174 | ASLR-L-X4-612-P240 | |
| Cover cap | | | | | | |
| | For sealing unused connections | For connection M8x1 | 10 | 177672 | ISK-M8 | |
| | | For connection M12x1 | 10 | 165592 | ISK-M12 | |
| DIN rail mounting | | | | | | |
| | For mounting a module on DIN rails according to EN 60715 | – | 8095158 | CAF-M-X4-H | | |

Datasheet – Digital input/output modules

- Function**
- Digital input/output modules facilitate the connection of electric sensors to IEC 61131-2 type 3 (inductive, capacitive) and of electrical consumers to IEC 1131-2 type 0.5 with an operating voltage of 24 V DC.
- Input/output modules for 24 V DC operating voltage
 - Connection M8x1 3-pin or M12x1 5-pin
 - Status and error indication via LED

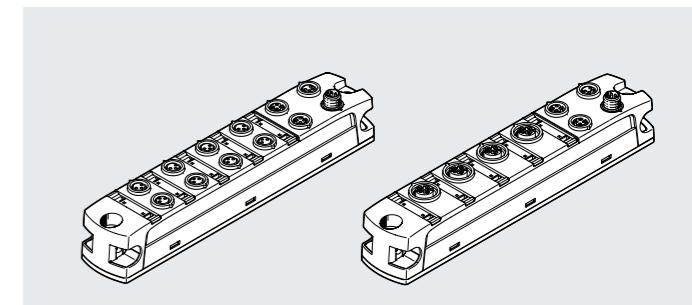

General technical data – Digital input/output modules

| | |
|--|--|
| Electrical connection, input, connection type | 2x socket; 4x socket |
| Number of inputs | 4 |
| Number of outputs | 4 |
| Electrical connection, input, function | Digital input |
| Electrical connection, input, connection technology | M8x1, A-coded to EN 61076-2-104; M12x1 A-coded to EN 61076-2-101 |
| Electrical connection, input, number of pins/cores | 3; 5 |
| Switching logic at inputs | PNP (positive switching) 2-wire sensors to IEC 61131-2 3-wire sensors to IEC 61131-2 |
| Input characteristics | To IEC 61131-2, type 3 |
| Switching level | Signal 0: <= 5 V; signal 1: >= 11 V |
| Fuse protection inputs (short circuit) | Internal electronic fuse per module |
| Input debounce time | 0.1 ms; 3 ms; 10 ms; 20 ms |
| Electrical isolation of inputs between channel - internal communication | Yes |
| Electrical isolation of inputs between channels | No |
| Electrical connection, output, function | Digital output |
| Electrical connection, output, connection type | 2x socket; 4x socket |
| Electrical connection, output, connection technology | M8x1, A-coded to EN 61076-2-104; M12x1 A-coded to EN 61076-2-101 |
| Electrical connection, output, number of pins/cores | 3; 5 |
| Switching logic at outputs | PNP (positive switching) |
| Characteristic curve of outputs | To IEC 61131-2, type 0.5 |
| Output delay with resistive load | Signal change 0->1: < 200 µs Signal change 1->0: < 200 µs |
| Fuse protection outputs (short circuit) | Internal electronic fuse per channel |
| Electrical isolation of outputs between channel - internal communication | Yes |
| Electrical isolation of outputs between channels | No |
| Communication interface, protocol | AP |
| Communication interface, function | System communication XF10 IN / XF20 OUT |
| Communication interface, connection type | 2 x socket |
| Communication interface, connection technology | M8x1, D-coded to EN 61076-2-114 |
| Communication interface, number of pins/cores | 4 |
| Communication interface, shielding | Yes |

Datasheet – Digital input/output modules

General data – Digital input/output modules

| | |
|--|--|
| Diagnostics via LED | Diagnostics per module Power supply load Status per channel |
| Diagnostics via internal communication | Load switch-off Short circuit/overload output signal Short circuit/overload in sensor supply Electronics/sensors overvoltage Load overvoltage Electronics/sensors undervoltage Undervoltage load |
| Max. cable length | 30 m outputs 30 m inputs 50 m system communication |
| Note on max. cable length | Power supply according to nominal voltage |
| Reverse polarity protection | Yes |

Technical data – Electrical – Digital input/output modules

| | |
|---|--|
| Nominal operating voltage DC for electronics/sensors | 24 V |
| Nominal operating voltage DC load | 24 V |
| Permissible voltage fluctuations, electronics/sensors | ± 25% |
| Permissible voltage fluctuations, load | ± 25% |
| Note on the operating voltage | SELV/PELV power supply units required; note voltage drop |
| Power failure buffering | 10 ms |
| Max. power supply per channel | 0.5 A |
| Max. total current of inputs per module | 1.8 A |
| Max. residual current outputs per module | 2 A |
| Intrinsic current consumption at nominal operating voltage, electronics/sensors | Typical 35 mA |
| Intrinsic current consumption at nominal operating voltage, load | Typical 10 mA |
| Power supply, function | Incoming electronics/sensors and load |
| Power supply, connection type | Plug |
| Power supply, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power supply, number of pins/cores | 4 |
| Power transmission, function | Outgoing electronics/sensors and load |
| Power transmission, connection type | Socket |
| Power transmission, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power transmission, number of pins/cores | 4 |

Technical data – Mechanical – Digital input/output modules

| | |
|----------------------|---|
| Type of mounting | On DIN rail with accessories; with through-hole |
| Product weight | 129 |
| Dimensions W x L x H | 30 mm x 170 mm x 35 mm |

Materials – Digital input/output modules

| | |
|------------------------|--|
| Housing material | PA; PC; nickel-plated die-cast zinc |
| O-ring material | FPM |
| Note on materials | RoHs-compliant |
| LABS (PWIS) conformity | VDMA24364-B2-L |
| Cleanroom class | Element installed statically, no meaningful evaluation possible according to ISO 14644-1 |


Datasheet – Digital input/output modules

Operating and environmental conditions digital input/output modules

| | |
|--|------------------------------|
| Ambient temperature | -20 ... 50 °C |
| Storage temperature | -40 ... 70 °C |
| Corrosion resistance class CRC ¹⁾ | 1 - Low corrosion stress |
| Relative humidity | 5 - 95%, non-condensing |
| CE marking (see declaration of conformity) ²⁾ | To EU EMC Directive |
| UKCA marking (see declaration of conformity) ³⁾ | To UK EMC regulations |
| KC marking | KC EMC |
| Certification | RCM c UL us - Listed (OL) |
| Certificate-issuing authority | UL E23998 |
| Degree of protection | IP65; IP67 |
| Note on degree of protection | Unused connections sealed |

¹⁾ More information www.festo.com/x/topic/crc²⁾ More information www.festo.com/catalogue/... Support/downloads.³⁾ More information www.festo.com/catalogue/... Support/downloads.

Connection and display components

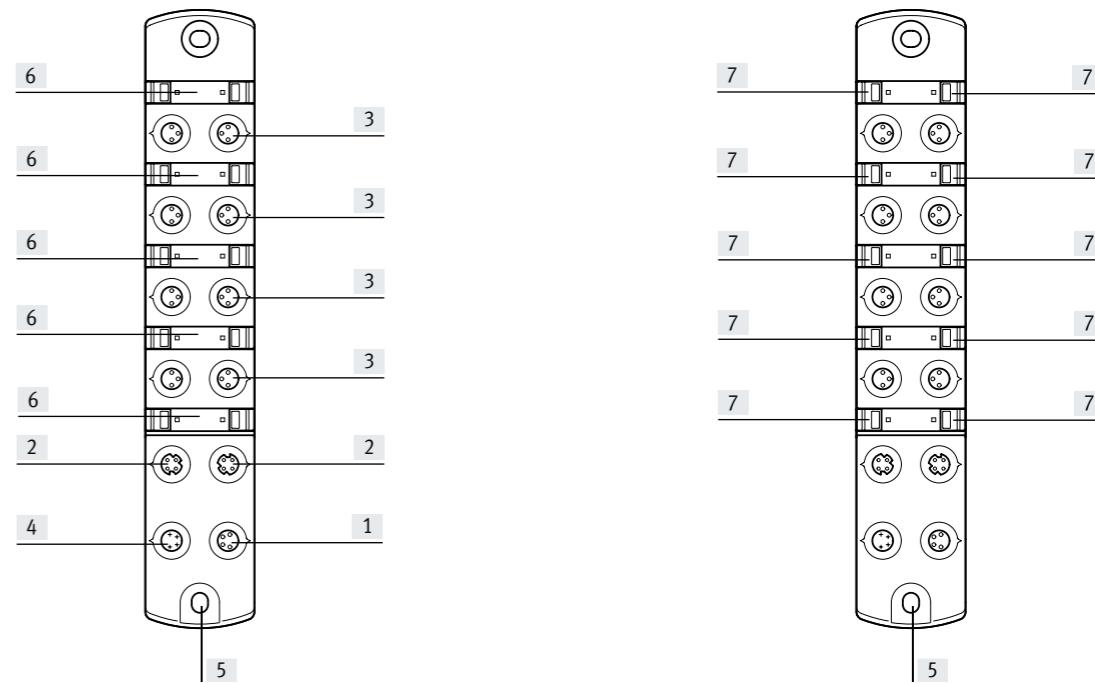

[1] Electrical connection, power transmission

[2] Communication interface

[3] Electrical connection, inputs/outputs

[4] Electrical connection, power supply


[5] Earth connection

[6] Space for inscription label

[7] LED indicators

Datasheet – Digital input/output modules

Dimensions – CPX-AP-I-4DI4DO-M8-3P

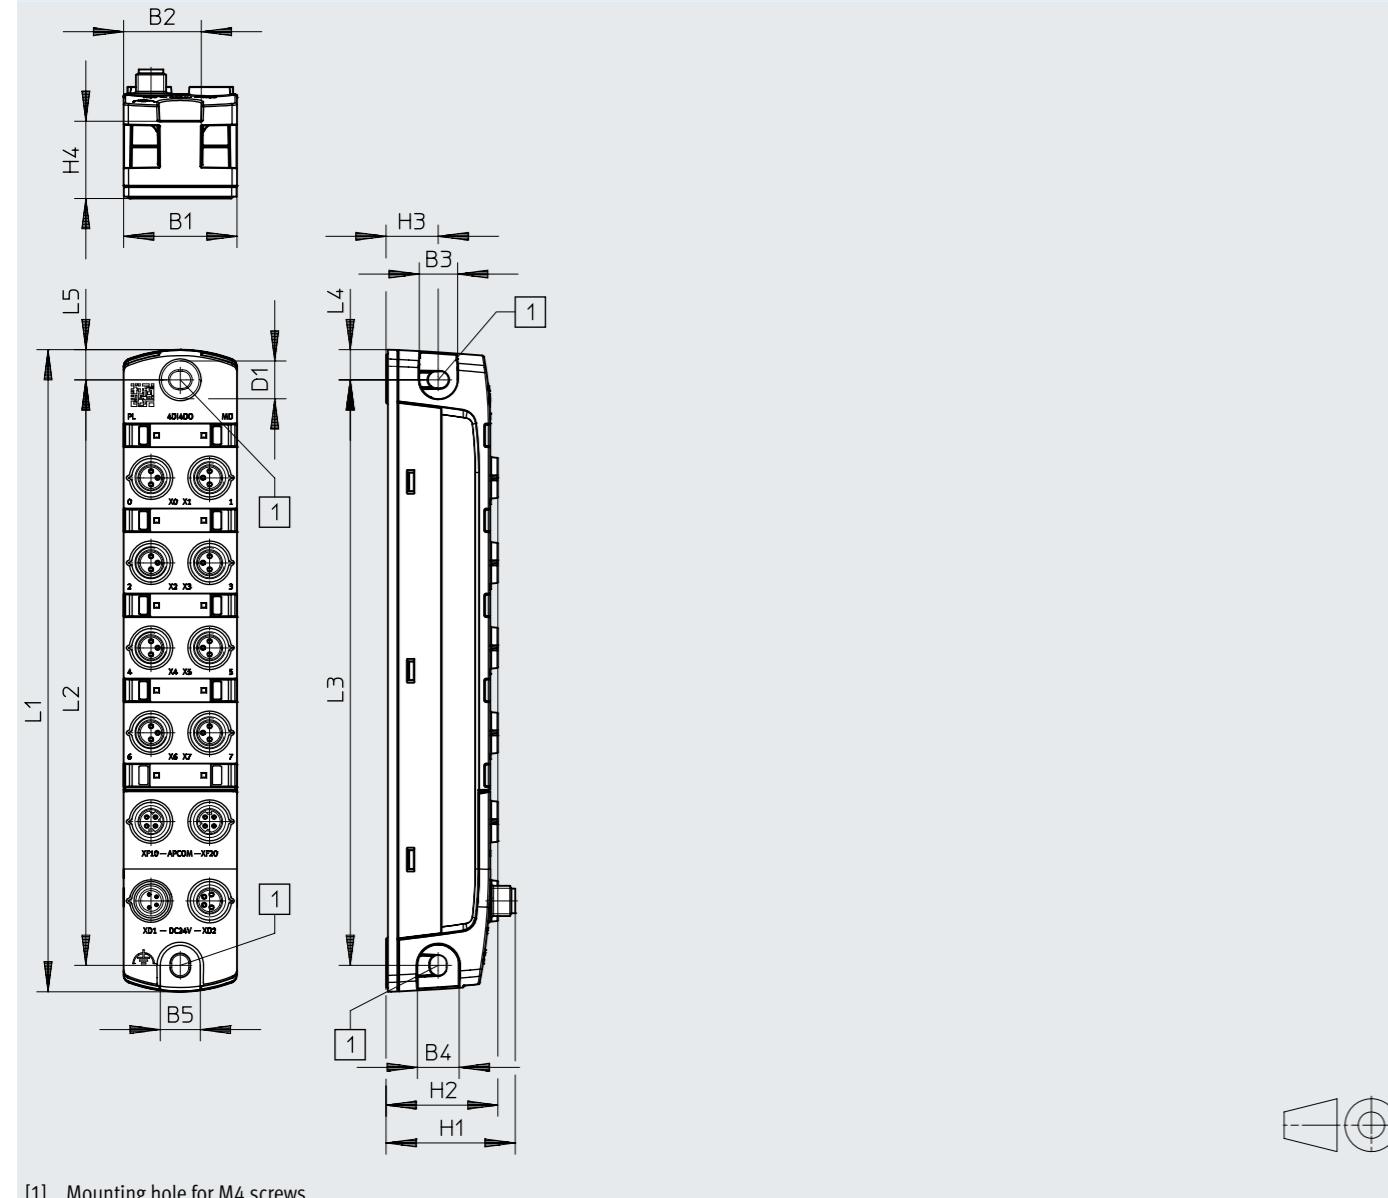


[1] Mounting hole for M4 screws

| | B1 | B2 | B3 | B4 | B5 | D1 ∅ | H1 | H2 | H3 | H4 | L1 | L2 | L3 | L4 | L5 |
|------------------------|----|------|----|----|----|---------|------|------|------|------|-----|-----|-----|----|----|
| CPX-AP-I-4DI4DO-M8-3P | 30 | 20.5 | 10 | 11 | 11 | 10 | 34.2 | 29.6 | 13.8 | 20.5 | 170 | 155 | 155 | 8 | 8 |
| CPX-AP-I-4DI4DO-M12-5P | 30 | 20.5 | 10 | 11 | 11 | 10 | 34.2 | 30.2 | 13.8 | 20.5 | 170 | 155 | 155 | 8 | 8 |

Datasheet – Digital input/output modules





Dimensions – CPX-AP-I-4DI4DO-M12-5P

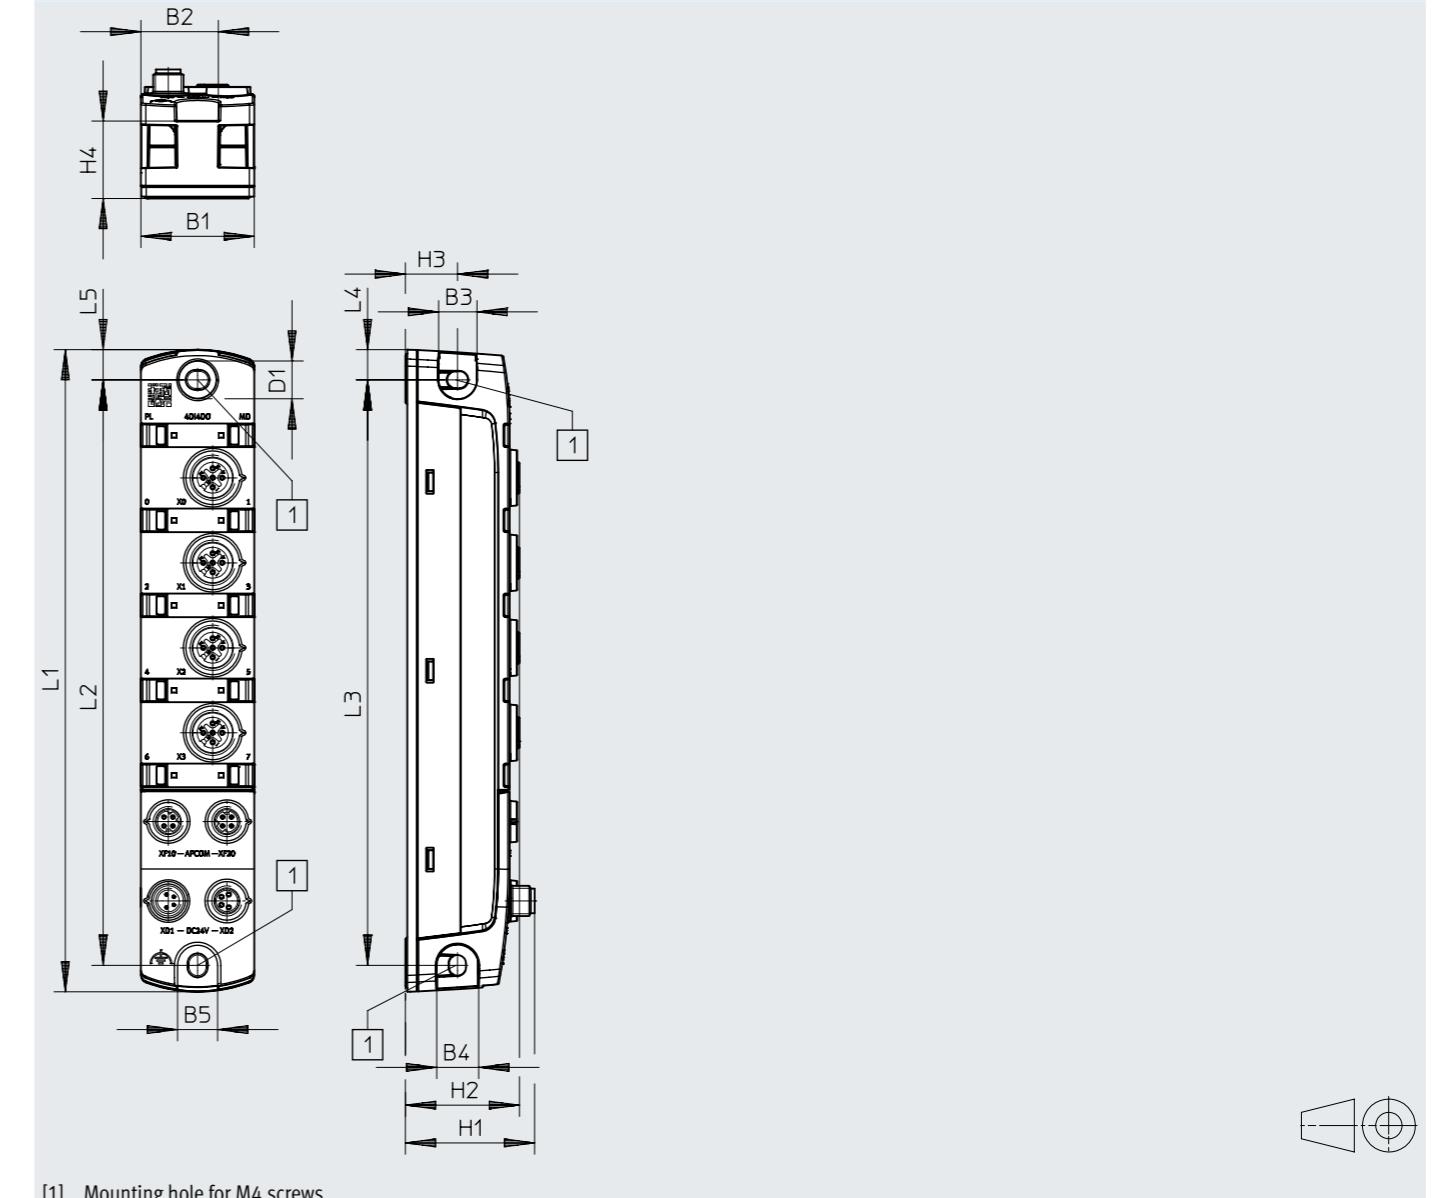


[1] Mounting hole for M4 screws

| | B1 | B2 | B3 | B4 | B5 | D1 ∅ | H1 | H2 | H3 | H4 | L1 | L2 | L3 | L4 | L5 |
|------------------------|----|------|----|----|----|---------|------|------|------|------|-----|-----|-----|----|----|
| CPX-AP-I-4DI4DO-M8-3P | 30 | 20.5 | 10 | 11 | 11 | 10 | 34.2 | 29.6 | 13.8 | 20.5 | 170 | 155 | 155 | 8 | 8 |
| CPX-AP-I-4DI4DO-M12-5P | 30 | 20.5 | 10 | 11 | 11 | 10 | 34.2 | 30.2 | 13.8 | 20.5 | 170 | 155 | 155 | 8 | 8 |

Datasheet – Digital input/output modules

| Ordering data | | | Part no. | Type |
|--|-------------------------------------|---|--|--|
|  | Digital input/output module | <ul style="list-style-type: none"> • Electrical connection input 4x socket, 3-pin, M8x1 • Electrical connection output 4x socket, 3-pin, M8x1 | 8086601 | CPX-AP-I-4DI4DO-M8-3P |
| | | | 8086603 | CPX-AP-I-4DI4DO-M12-5P |
| Ordering data – Accessories | | | | |
| Description | | Part no. | Type | |
| Plug connectors for self-assembly | | | | |
|  | For inputs | Straight plug, M8x1, 3-pin, A-coded | Screw terminal | 8162298 NECB-S-M8G3-C2 |
| | | Straight plug, M12x1, 5-pin, A-coded | Screw terminal | 8162296 NECB-S-M12G5-C2 |
| Distributor | | | | |
|  | For inputs | Straight plug, M8x1, 4-pin, A-coded | 2x straight socket, M8x1, 3-pin, A-coded | 8005312 NEDY-L2R1-V1-M8G3-N-M8G4 |
| Connecting cable | | | | |
|  | For inputs | Straight plug, M8x1, 3-pin, A-coded | Straight socket, M8x1, 3-pin, A-coded | 0.5 m 8078282 NEBA-M8G3-U-0.5-N-M8G3 |
| | | | | 1.0 m 8078283 NEBA-M8G3-U-1-N-M8G3 |
|  | For communication interface | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 1.5 m 8078284 NEBA-M8G3-U-1.5-N-M8G3 |
| | | | | 2.5 m 8078286 NEBA-M8G3-U-2.5-N-M8G3 |
|  | Angled plug, M8x1, 4-pin, D-coded | Angled plug, M8x1, 4-pin, D-coded | Angled plug, M8x1, 4-pin, D-coded | 5.0 m 8078287 NEBA-M8G3-U-5-N-M8G3 |
| | | | | 10.0 m 8078288 NEBA-M8G3-U-10-N-M8G3 |
|  | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 0.3 m 8082902 NEBC-D8G4-ES-0.3-N-S-D8G4-ET |
| | | | | 0.5 m 8065123 NEBC-D8G4-ES-0.5-N-S-D8G4-ET |
|  | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 1.0 m 8065125 NEBC-D8G4-ES-1-N-S-D8G4-ET |
| | | | | 2.0 m 8065127 NEBC-D8G4-ES-2-N-S-D8G4-ET |
|  | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 5.0 m 8065129 NEBC-D8G4-ES-5-N-S-D8G4-ET |
| | | | | 7.5 m 8065131 NEBC-D8G4-ES-7.5-N-S-D8G4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 10.0 m 8065133 NEBC-D8G4-ES-10-N-S-D8G4-ET |
| | | | | 15.0 m 8065135 NEBC-D8G4-ES-15-N-S-D8G4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 20.0 m 8146031 NEBC-D8G4-ES-20-N-S-D8G4-ET |
| | | | | 25.0 m 8146032 NEBC-D8G4-ES-25-N-S-D8G4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 30.0 m 8146033 NEBC-D8G4-ES-30-N-S-D8G4-ET |
| | | | | 40.0 m 8146034 NEBC-D8G4-ES-40-N-S-D8G4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 50.0 m 8146035 NEBC-D8G4-ES-50-N-S-D8G4-ET |
| | | | | 0.5 m 8065124 NEBC-D8W4-ES-0.5-N-S-D8W4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 1.0 m 8065126 NEBC-D8W4-ES-1-N-S-D8W4-ET |
| | | | | 2.0 m 8065128 NEBC-D8W4-ES-2-N-S-D8W4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 5.0 m 8065130 NEBC-D8W4-ES-5-N-S-D8W4-ET |
| | | | | 7.5 m 8065132 NEBC-D8W4-ES-7.5-N-S-D8W4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 10.0 m 8065134 NEBC-D8W4-ES-10-N-S-D8W4-ET |
| | | | | 15.0 m 8065136 NEBC-D8W4-ES-15-N-S-D8W4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 20.0 m 8146036 NEBC-D8W4-ES-20-N-S-D8W4-ET |
| | | | | 25.0 m 8146037 NEBC-D8W4-ES-25-N-S-D8W4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 30.0 m 8146038 NEBC-D8W4-ES-30-N-S-D8W4-ET |
| | | | | 40.0 m 8146039 NEBC-D8W4-ES-40-N-S-D8W4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 50.0 m 8146040 NEBC-D8W4-ES-50-N-S-D8W4-ET |

Datasheet – Digital input/output modules


| Ordering data – Accessories | | Description | | Part no. | Type |
|---|--|--|-------------------------------------|-----------------------|------------------------|
|  | For power supply | Straight socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 5.0 m 8065110 | NEBL-M8G4-E-5-N-LE4 |
| | | | | 7.5 m 8065113 | NEBL-M8G4-E-7.5-N-LE4 |
| | | | | 10.0 m 8065117 | NEBL-M8G4-E-10-N-LE4 |
| | | | | 15.0 m 8065121 | NEBL-M8G4-E-15-N-LE4 |
|  | Open cable end, 4-core | Angled socket, M8x1, 4-pin, A-coded | 7.5 m 8065114 | NEBL-M8W4-E-7.5-N-LE4 | |
| | | | 10.0 m 8065118 | NEBL-M8W4-E-10-N-LE4 | |
| | | | 15.0 m 8065122 | NEBL-M8W4-E-15-N-LE4 | |
|  | For power transmission | Straight socket, M8x1, 4-pin, A-coded | Straight plug, M8x1, 4-pin, A-coded | 0.3 m 8082904 | NEBL-M8G4-E-0.3-N-M8G4 |
| | | | | 0.5 m 8065102 | NEBL-M8G4-E-0.5-N-M8G4 |
| | | | | 1.0 m 8065104 | NEBL-M8G4-E-1-N-M8G4 |
| | | | | 2.0 m 8065106 | NEBL-M8G4-E-2-N-M8G4 |
| | | | | 5.0 m 8065108 | NEBL-M8G4-E-5-N-M8G4 |
| | | | | 7.5 m 8065111 | NEBL-M8G4-E-7.5-N-M8G4 |
| | | | | 10.0 m 8065115 | NEBL-M8G4-E-10-N-M8G4 |
| | | | | 15.0 m 8065119 | NEBL-M8G4-E-15-N-M8G4 |
|  | Angled socket, M8x1, 4-pin, A-coded | Angled plug, M8x1, 4-pin, A-coded | Angled plug, M8x1, 4-pin, A-coded | 0.3 m 8146577 | NEBL-M8W4-E-0.3-N-M8W4 |
| | | | | 0.5 m 8065103 | NEBL-M8W4-E-0.5-N-M8W4 |
| | | | | 1.0 m 8065105 | NEBL-M8W4-E-1-N-M8W4 |
| | | | | 2.0 m 8065107 | NEBL-M8W4-E-2-N-M8W4 |
| | | | | 5.0 m 8065109 | NEBL-M8W4-E-5-N-M8W4 |
| | | | | 7.5 m 8065112 | NEBL-M8W4-E-7.5-N-M8W4 |
| | | | | 10.0 m 8065116 | NEBL-M8W4-E-10-N-M8W4 |
| | | | | 15.0 m 8065120 | NEBL-M8W4-E-15-N-M8W4 |
| Ordering data – Accessories | | Description | Pack size | Part no. | Type |
| Inscription labels | | | | | |
|  | For modules CPX-AP-I | Size 6x 12.5 mm, 10 frames with 24 pieces each | 240 | 8087174 | ASLR-L-X4-612-P240 |
| Cover cap | | | | | |
|  | For sealing unused connections | For connection M8x1 | 10 | 177672 | ISK-M8 |
| | | For connection M12x1 | 10 | 165592 | ISK-M12 |
| DIN rail mounting | | | | | |
|  | For mounting a module on DIN rails according to EN 60715 | | - | 8095158 | CAF-M-X4-H |

Datasheet – Pneumatic interface plate for valve terminal VTUX

Function

The interface plate enables a valve terminal VTUX to be operated as part of the remote I/O system CPX-AP-I.

- Indication of power supply and module diagnostics via LED indicators
- Up to 32 valve positions with up to 32 solenoid coils
- Short circuit shutdown, short circuit diagnostics and switching cycle counter

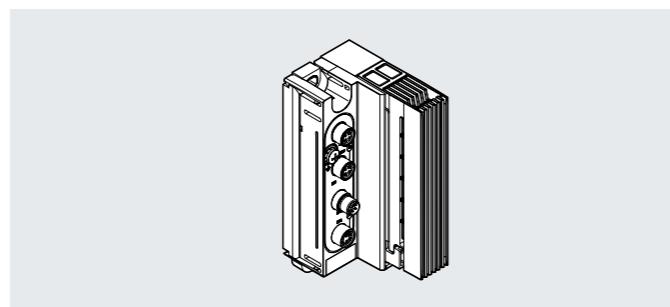**General technical data – Pneumatic interface plate for valve terminal VTUX**

| Compatible with | Valve terminal VTUX-A-P | Valve terminal VTUX-A-S |
|---------------------------------|--------------------------|-------------------------|
| Valve terminal design | Valve sizes can be mixed | |
| Size | 1 2 | |
| Protocol | AP | |
| Electrical control | AP interface | |
| Max. address volume for outputs | 4 bytes | |
| Max. no. of solenoid coils | 32 | 128 |

Communication interface – Pneumatic interface plate for valve terminal VTUX

| | |
|--|---|
| Communication interface, function | System communication XF10 IN / XF20 OUT |
| Communication interface, connection type | 2 x socket |
| Communication interface, connection technology | M8x1, D-coded to EN 61076-2-114 |
| Communication interface, number of pins/cores | 4 |
| Communication interface, shielding | Yes |

General data – Pneumatic interface plate for valve terminal VTUX

| Compatible with | Valve terminal VTUX-A-P | Valve terminal VTUX-A-S |
|--|--|---|
| Module parameters | Configuration of voltage monitoring load supply PL Response in error state | |
| Diagnostics via LED | Diagnostics per module Power supply load | Diagnostics per module |
| Diagnostics via internal communication | Load switch-off Electronics/sensors overvoltage Electronics/sensors undervoltage | Load supply undervoltage PL Logic supply undervoltage PS |
| Max. cable length | 50 m | |

Datasheet – Pneumatic interface plate for valve terminal VTUX

Technical data – Electrical – Interface plate for valve terminal VTUX

| | |
|--|--|
| Nominal operating voltage DC for electronics/sensors | 24 V |
| Permissible voltage fluctuations, electronics/sensors | ± 25% |
| Nominal operating voltage DC load | 24 V |
| Permissible voltage fluctuations, load | ± 10% |
| Undervoltage load/valves (diagnostic message) | ≤ 21.1 V |
| Note on the operating voltage | SELV/PELV power supply units required; note voltage drop |
| Power failure buffering | 10 ms |
| Max. power supply | 2 x 4 A (external fuse required) |
| Fuse protection (short circuit) | Internal electronic fuse per channel |
| Inductive protective circuit | Integrated |
| Overvoltage category | II |
| Protection against direct and indirect contact | PELV, SELV |
| Reverse polarity protection | Yes |
| Intrinsic current consumption at nominal operating voltage, electronics/sensors | Typical 27 mA |
| Intrinsic current consumption at nominal operating voltage, load | Typical 13 mA |
| Power consumption at 24 VDC | 650 mW |
| Pollution degree | 2 |
| Electrical isolation of outputs between channel - internal communication | Yes |
| Galvanic isolation between the supply voltages electronics/sensors and load/valves | Yes |

Electrical connection – Power supply – Interface plate for valve terminal VTUX

| | |
|-------------------------------------|---------------------------------------|
| Power supply, function | Incoming electronics/sensors and load |
| Power supply, connection type | Socket |
| Power supply, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power supply, number of pins/cores | 4 |

Electrical connection – Voltage transmission – Interface plate for valve terminal VTUX

| | |
|---|---------------------------------------|
| Power transmission, function | Outgoing electronics/sensors and load |
| Power transmission, connection type | Socket |
| Power transmission, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power transmission, number of pins/cores | 4 |

Technical data – Mechanical – Interface plate for valve terminal VTUX

| Compatible with | Valve terminal VTUX-A-P | Valve terminal VTUX-A-S |
|--|--------------------------------|-------------------------|
| Type of mounting | With through-hole for M5 screw | |
| Type of mounting sub-base | With through-hole | |
| Connection position | On the side | |
| Cable outlet | Straight | |
| Pneumatic connection 1 | For 15 mm cartridge | |
| Pneumatic connection 5 | For 15 mm cartridge | |
| Product weight | 144.8 g | 150 g |
| Dimensions W x L x H | 45.6 mm x 117.4 mm x 53.9 mm | |
| Max. tightening torque for wall mounting | 6 | |

Materials – Pneumatic interface plate for valve terminal VTUX

| | |
|------------------------|----------------------------|
| Sub-base material | Reinforced PA |
| Cover material | Reinforced PA |
| Film material | Polyester |
| Sleeve material | High-alloy stainless steel |
| Clamp material | High-alloy stainless steel |
| Nut material | High-alloy stainless steel |
| Sealing material | NBR |
| Note on materials | RoHS-compliant |
| LABS (PWIS) conformity | VDMA24364-B1/B2-L |

Datasheet – Pneumatic interface plate for valve terminal VTUX


Operating and environmental conditions – Pneumatic interface plate for valve terminal VTUX

| Compatible with | Valve terminal VTUX-A-P | Valve terminal VTUX-A-S |
|--|--|-------------------------|
| Ambient temperature | -20 ... 50 °C | -5 ... 50 °C |
| Storage temperature | -20 ... 70 °C | |
| Corrosion resistance class CRC ¹⁾ | 2 - Moderate corrosion stress | |
| Relative humidity | 5 - 95% | |
| Nominal operating altitude | <= 2000 m NHN | |
| Max. setup altitude | 3,500 m | |
| Vibration resistant | Transport application test with severity level 2 to FN 942017-4 and EN 60068-2-6 | |
| Shock resistance | Shock test with severity level 2 to FN 942017-5 and EN 60068-2-27 | |
| CE marking (see declaration of conformity) ²⁾ | To EU EMC Directive To EU RoHS Directive | |
| UKCA marking (see declaration of conformity) ³⁾ | To UK EMC regulations To UK RoHS regulations | |
| KC marking | KC EMC | |
| Certification | RCM | |
| Degree of protection | IP65 | |
| Note on degree of protection | Unused connections sealed | |

1) More information www.festo.com/x/topic/crc2) More information www.festo.com/catalogue/... Support/downloads.3) More information www.festo.com/catalogue/... Support/downloads.

Datasheet – Pneumatic interface plate for valve terminal VTUX

Connection and display components

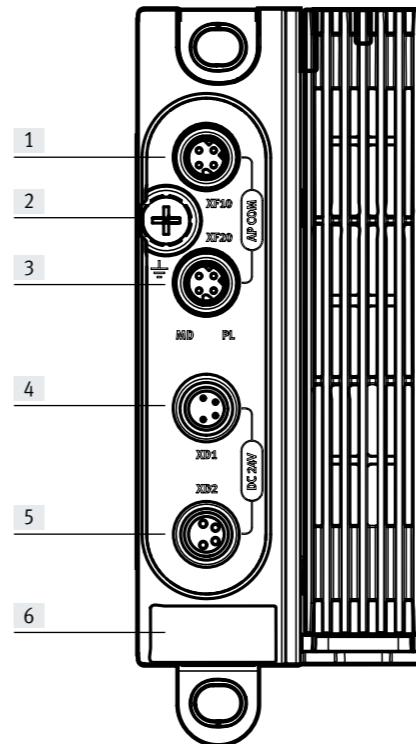

- [1] XF10 Communication interface
- [2] Earth connection
- [3] XF20 Communication interface
- [4] XD1 Electrical connection, power supply
- [5] XD2 Electrical connection, power transmission
- [6] Rating plate

Pin allocation for communication interface 2x socket M8x1, D-coded, 4-pin

| Terminal assignment | Pin | Assignment | Description |
|---------------------|-----|------------|-------------------|
| 1 | 1 | TX- | Transmitted data- |
| 2 | 2 | RX+ | Received data+ |
| 3 | 3 | TX+ | Transmitted data+ |
| 4 | 4 | RX- | Received data- |


Pin allocation for power supply M8x1, A-coded, 4-pin

| Terminal assignment | Pin | Assignment | Description |
|---------------------|-----|------------|--|
| 2 + + 4 | 1 | 24 V | Operating voltage 24 V electronics and sensors |
| 1 + + 3 | 2 | 0 V | Operating voltage 0 V load voltage supply |
| | 3 | 0 V | Operating voltage 0 V electronics and sensors |
| | 4 | 24 V | Operating voltage 24 V load voltage supply |



Pin allocation for power transmission, socket M8x1, A-coded, 4-pin

| Terminal assignment | Pin | Assignment | Description |
|---------------------|-----|------------|--|
| 4 | 1 | 24 V | Operating voltage 24 V electronics and sensors |
| 3 | 2 | 0 V | Operating voltage 0 V load voltage supply |
| 2 | 3 | 0 V | Operating voltage 0 V electronics and sensors |
| 1 | 4 | 24 V | Operating voltage 24 V load voltage supply |

Datasheet – Pneumatic interface plate for valve terminal VTUX

| Ordering data | | Part no. | Type |
|--|---|------------------------|-----------------------------|
|  | Pneumatic interface plate for valve terminal VTUX | 8189592 | VABX-A-P-EL-E12-API-SHUH-XL |
| | Parallel communication | Maximum 32 valve coils | 8189593 |

| Ordering data – Accessories | | Part no. | Type |
|-----------------------------|-------------|----------|------|
| | Description | | |

| Connecting cable | | Part no. | Type |
|--|---------------------------------------|----------|------------------------------|
|  | For communication interface | 8082902 | NEBC-D8G4-ES-0.3-N-S-D8G4-ET |
| | Straight plug, M8x1, 4-pin, D-coded | 8065123 | NEBC-D8G4-ES-0.5-N-S-D8G4-ET |
| | | 8065125 | NEBC-D8G4-ES-1-N-S-D8G4-ET |
| | | 8065127 | NEBC-D8G4-ES-2-N-S-D8G4-ET |
| | | 8065129 | NEBC-D8G4-ES-5-N-S-D8G4-ET |
| | | 8065131 | NEBC-D8G4-ES-7.5-N-S-D8G4-ET |
| | | 8065133 | NEBC-D8G4-ES-10-N-S-D8G4-ET |
| | | 8065135 | NEBC-D8G4-ES-15-N-S-D8G4-ET |
| | | 8146031 | NEBC-D8G4-ES-20-N-S-D8G4-ET |
| | | 8146032 | NEBC-D8G4-ES-25-N-S-D8G4-ET |
| | | 8146033 | NEBC-D8G4-ES-30-N-S-D8G4-ET |
| | | 8146034 | NEBC-D8G4-ES-40-N-S-D8G4-ET |
| | | 8146035 | NEBC-D8G4-ES-50-N-S-D8G4-ET |
|  | Angled plug, M8x1, 4-pin, D-coded | 8065124 | NEBC-D8W4-ES-0.5-N-S-D8W4-ET |
| | Angled plug, M8x1, 4-pin, D-coded | 8065126 | NEBC-D8W4-ES-1-N-S-D8W4-ET |
| | | 8065128 | NEBC-D8W4-ES-2-N-S-D8W4-ET |
| | | 8065130 | NEBC-D8W4-ES-5-N-S-D8W4-ET |
| | | 8065132 | NEBC-D8W4-ES-7.5-N-S-D8W4-ET |
| | | 8065134 | NEBC-D8W4-ES-10-N-S-D8W4-ET |
| | | 8065136 | NEBC-D8W4-ES-15-N-S-D8W4-ET |
| | | 8146036 | NEBC-D8W4-ES-20-N-S-D8W4-ET |
| | | 8146037 | NEBC-D8W4-ES-25-N-S-D8W4-ET |
| | | 8146038 | NEBC-D8W4-ES-30-N-S-D8W4-ET |
| | | 8146039 | NEBC-D8W4-ES-40-N-S-D8W4-ET |
| | | 8146040 | NEBC-D8W4-ES-50-N-S-D8W4-ET |
|  | For power supply | 8065110 | NEBL-M8G4-E-5-N-LE4 |
| | Straight socket, M8x1, 4-pin, A-coded | 8065113 | NEBL-M8G4-E-7.5-N-LE4 |
| | | 8065117 | NEBL-M8G4-E-10-N-LE4 |
| | | 8065121 | NEBL-M8G4-E-15-N-LE4 |
|  | Angled socket, M8x1, 4-pin, A-coded | 8065114 | NEBL-M8W4-E-7.5-N-LE4 |
| | Open cable end, 4-core | 8065118 | NEBL-M8W4-E-10-N-LE4 |
| | | 8065122 | NEBL-M8W4-E-15-N-LE4 |
|  | For power transmission | 8082904 | NEBL-M8G4-E-0.3-N-M8G4 |
| | Straight socket, M8x1, 4-pin, A-coded | 8065102 | NEBL-M8G4-E-0.5-N-M8G4 |
| | | 8065104 | NEBL-M8G4-E-1-N-M8G4 |
| | | 8065106 | NEBL-M8G4-E-2-N-M8G4 |
| | | 8065108 | NEBL-M8G4-E-5-N-M8G4 |
| | | 8065111 | NEBL-M8G4-E-7.5-N-M8G4 |
| | | 8065115 | NEBL-M8G4-E-10-N-M8G4 |
| | | 8065119 | NEBL-M8G4-E-15-N-M8G4 |
|  | Angled socket, M8x1, 4-pin, A-coded | 8146577 | NEBL-M8W4-E-0.3-N-M8W4 |
| | Angled plug, M8x1, 4-pin, A-coded | 8065103 | NEBL-M8W4-E-0.5-N-M8W4 |
| | | 8065105 | NEBL-M8W4-E-1-N-M8W4 |
| | | 8065107 | NEBL-M8W4-E-2-N-M8W4 |
| | | 8065109 | NEBL-M8W4-E-5-N-M8W4 |
| | | 8065112 | NEBL-M8W4-E-7.5-N-M8W4 |
| | | 8065116 | NEBL-M8W4-E-10-N-M8W4 |
| | | 8065120 | NEBL-M8W4-E-15-N-M8W4 |

Datasheet – Pneumatic interface plate for valve terminal VTUX


| Ordering data – Accessories | | Description | Pack size | Part no. | Type |
|---|--|---|---------------------|----------|------------------|
|  | Cover cap | For sealing unused connections | For connection M8x1 | 10 | 177672 ISK-M8 |
|  | Plate | Position function 1-64: UD Plate for ducted exhaust air, without cartridge, for mounting on interface plate for VTUX | | 8191794 | VABF-XA-12-M2-QX |
|  | Position function 1-64: US Exhaust plate for mounting on interface plate for VTUX | | | 8191741 | VABF-XA-12-M1-C |

Datasheet – Electrical interface for valve terminal VTUG

Function

With the electrical interface, a valve terminal VTUG can be operated as part of the remote I/O system CPX-AP-I.

- Indication of status and error messages via LED indicators
- Up to 24 valve positions with up to 48 solenoid coils
- Separate load voltage supply for the connected valves; can be disconnected separately
- Short-circuit disconnection

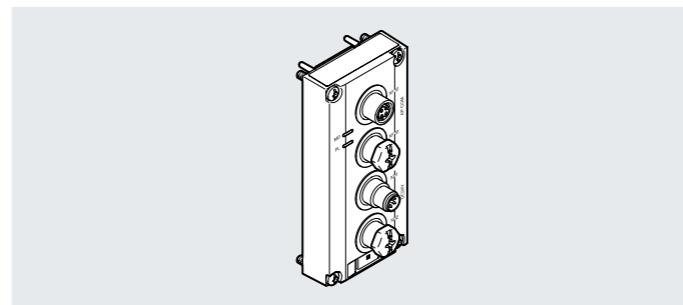

General technical data – Electrical interface for valve terminal VTUG

| | |
|--------------------------------|----------|
| Max. number of valve positions | 12 24 |
| Max. no. of solenoid coils | 24 48 |

Communication interface – Electrical interface for valve terminal VTUG

| | |
|--|---|
| Communication interface, protocol | AP-COM |
| Communication interface, function | System communication XF10 IN / XF20 OUT |
| Communication interface, connection type | 2 x socket |
| Communication interface, connection technology | M8x1, D-coded to EN 61076-2-114 |
| Communication interface, number of pins/cores | 4 |
| Communication interface, shielding | Yes |

General data – Electrical interface for valve terminal VTUG

| | |
|--|---|
| Module parameters | Configuration of voltage monitoring load supply PL Response in error state |
| Diagnostics via LED | Diagnostics per module Power supply load |
| Diagnostics via internal communication | Load switch-off Electronics/sensors overvoltage Load overvoltage Electronics/sensors undervoltage Undervoltage load |
| Max. cable length | 50 m system communication |

Technical data – Electrical – Electrical interface for valve terminal VTUG

| | | |
|---|--|---------------|
| Max. no. of solenoid coils | 24 | 48 |
| Nominal operating voltage DC for electronics/sensors | 24 V | |
| Permissible voltage fluctuations, electronics/sensors | ± 25% | |
| Nominal operating voltage DC load | 24 V | |
| Permissible voltage fluctuations, load | ± 10% | |
| Note on the operating voltage | SELV/PELV power supply units required; note voltage drop | |
| Power failure buffering | 10 ms | |
| Mains buffering of load | 3 ms | |
| Max. power supply | 2 x 4 A (external fuse required) | |
| Fuse protection (short circuit) | Internal electronic fuse per channel | |
| Protection against direct and indirect contact | PELV, SELV | |
| Reverse polarity protection | Yes | |
| Intrinsic current consumption at nominal operating voltage, electronics/sensors | Typical 34 mA | |
| Intrinsic current consumption at nominal operating voltage, load | Typical 16 mA | Typical 22 mA |

Datasheet – Electrical interface for valve terminal VTUG

Electrical connection – Power supply – Electrical interface for valve terminal VTUG

| | |
|-------------------------------------|---------------------------------------|
| Power supply, function | Incoming electronics/sensors and load |
| Power supply, connection type | Plug |
| Power supply, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power supply, number of pins/cores | 4 |

Electrical connection – Power transmission – Electrical interface for valve terminal VTUG

| | |
|---|---------------------------------------|
| Power transmission, function | Outgoing electronics/sensors and load |
| Power transmission, connection type | Socket |
| Power transmission, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power transmission, number of pins/cores | 4 |

Technical data – Mechanical – Electrical interface for valve terminal VTUG

| | |
|----------------------|-----------------------|
| Type of mounting | Screw-clamped |
| Connection position | On top |
| Product weight | 76 g |
| Dimensions W x L x H | 42 mm x 91 mm x 30 mm |

Materials – Electrical interface for valve terminal VTUG

| | |
|--------------------------|---------------------|
| Housing material | Reinforced PA |
| Threaded sleeve material | Nickel-plated brass |
| Note on materials | RoHS-compliant |
| LABS (PWIS) conformity | VDMA24364-B1/B2-L |

Operating and environmental conditions – Electrical interface for valve terminal VTUG

| | |
|--|---|
| Ambient temperature | -5 ... 60 °C |
| Storage temperature | -20 ... 60 °C |
| Corrosion resistance class CRC ¹⁾ | 2 - Moderate corrosion stress |
| Relative humidity | 5 - 95%, non-condensing |
| Nominal operating altitude | <= 2000 m NHN |
| CE marking (see declaration of conformity) ²⁾ | To EU EMC Directive |
| UKCA marking (see declaration of conformity) ³⁾ | To UK EMC regulations |
| KC marking | KC EMC |
| Certification | RCM c UL us - Recognized (OL) |
| Degree of protection | IP65; IP67 |
| Note on degree of protection | In assembled state, unused connections closed |


1) More information www.festo.com/x/topic/crc

2) More information www.festo.com/catalogue/... Support/downloads.

3) More information www.festo.com/catalogue/... Support/downloads.

Datasheet – Electrical interface for valve terminal VTUG

Connection and display components

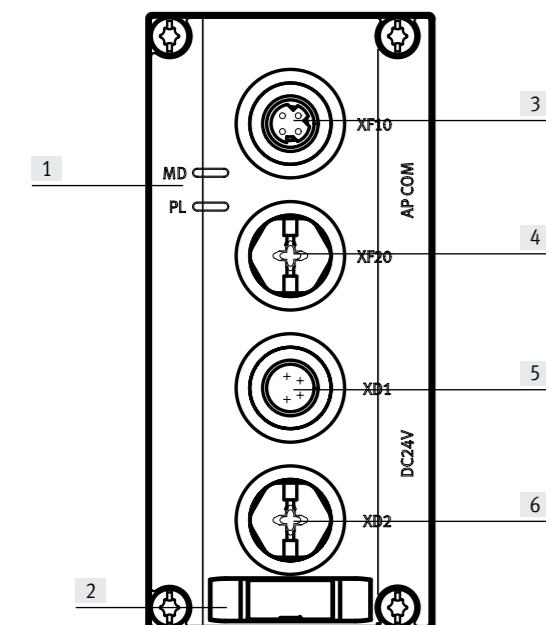

- [1] LED indicators
- [2] Space for inscription label
- [3] Communication interface
- [4] Communication interface 2
- [5] Electrical connection, power supply
- [6] Electrical connection, power transmission

Dimensions

| Download CAD data → www.festo.com | | | |
|--|------|------|------|
| | B1 | H1 | L1 |
| VAEM-L1-S-12-AP | 90.5 | 28.1 | 41.8 |
| VAEM-L1-S-24-AP | 90.5 | 28.1 | 41.8 |

Datasheet – Electrical interface for valve terminal VTUG

Ordering data

| | | | Part no. | Type |
|--|--|--------------------|----------|-----------------|
| | Electrical interface for valve terminal VTUG | 12 valve positions | 8081922 | VAEM-L1-S-12-AP |
| | | 24 valve positions | 8081923 | VAEM-L1-S-24-AP |

Ordering data – Accessories


| | Description | | Part no. | Type |
|-------------------------|-------------------------------------|---------------------------------------|-------------------------------------|--------------------------------------|
| Connecting cable | | | | |
| | For communication interface | Straight plug, M8x1, 4-pin, D-coded | 0.3 m | 8082902 NEBC-D8G4-ES-0.3-N-S-D8G4-ET |
| | | | 0.5 m | 8065123 NEBC-D8G4-ES-0.5-N-S-D8G4-ET |
| | | | 1.0 m | 8065125 NEBC-D8G4-ES-1-N-S-D8G4-ET |
| | | | 2.0 m | 8065127 NEBC-D8G4-ES-2-N-S-D8G4-ET |
| | | | 5.0 m | 8065129 NEBC-D8G4-ES-5-N-S-D8G4-ET |
| | | | 7.5 m | 8065131 NEBC-D8G4-ES-7.5-N-S-D8G4-ET |
| | | | 10.0 m | 8065133 NEBC-D8G4-ES-10-N-S-D8G4-ET |
| | | | 15.0 m | 8065135 NEBC-D8G4-ES-15-N-S-D8G4-ET |
| | | | 20.0 m | 8146031 NEBC-D8G4-ES-20-N-S-D8G4-ET |
| | | | 25.0 m | 8146032 NEBC-D8G4-ES-25-N-S-D8G4-ET |
| | | | 30.0 m | 8146033 NEBC-D8G4-ES-30-N-S-D8G4-ET |
| | | | 40.0 m | 8146034 NEBC-D8G4-ES-40-N-S-D8G4-ET |
| | | | 50.0 m | 8146035 NEBC-D8G4-ES-50-N-S-D8G4-ET |
| | Angled plug, M8x1, 4-pin, D-coded | Angled plug, M8x1, 4-pin, D-coded | 0.5 m | 8065124 NEBC-D8W4-ES-0.5-N-S-D8W4-ET |
| | | | 1.0 m | 8065126 NEBC-D8W4-ES-1-N-S-D8W4-ET |
| | | | 2.0 m | 8065128 NEBC-D8W4-ES-2-N-S-D8W4-ET |
| | | | 5.0 m | 8065130 NEBC-D8W4-ES-5-N-S-D8W4-ET |
| | | | 7.5 m | 8065132 NEBC-D8W4-ES-7.5-N-S-D8W4-ET |
| | | | 10.0 m | 8065134 NEBC-D8W4-ES-10-N-S-D8W4-ET |
| | | | 15.0 m | 8065136 NEBC-D8W4-ES-15-N-S-D8W4-ET |
| | | | 20.0 m | 8146036 NEBC-D8W4-ES-20-N-S-D8W4-ET |
| | | | 25.0 m | 8146037 NEBC-D8W4-ES-25-N-S-D8W4-ET |
| | | | 30.0 m | 8146038 NEBC-D8W4-ES-30-N-S-D8W4-ET |
| | | | 40.0 m | 8146039 NEBC-D8W4-ES-40-N-S-D8W4-ET |
| | | | 50.0 m | 8146040 NEBC-D8W4-ES-50-N-S-D8W4-ET |
| | For power supply | Straight socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 5.0 m 8065110 NEBL-M8G4-E-5-N-LE4 |
| | | | | 7.5 m 8065113 NEBL-M8G4-E-7.5-N-LE4 |
| | | | | 10.0 m 8065117 NEBL-M8G4-E-10-N-LE4 |
| | | | | 15.0 m 8065121 NEBL-M8G4-E-15-N-LE4 |
| | Angled socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 7.5 m 8065114 NEBL-M8W4-E-7.5-N-LE4 | |
| | | | | 10.0 m 8065118 NEBL-M8W4-E-10-N-LE4 |
| | | | | 15.0 m 8065122 NEBL-M8W4-E-15-N-LE4 |
| | For power transmission | Straight socket, M8x1, 4-pin, A-coded | Straight plug, M8x1, 4-pin, A-coded | 0.3 m 8082904 NEBL-M8G4-E-0.3-N-M8G4 |
| | | | | 0.5 m 8065102 NEBL-M8G4-E-0.5-N-M8G4 |
| | | | | 1.0 m 8065104 NEBL-M8G4-E-1-N-M8G4 |
| | | | | 2.0 m 8065106 NEBL-M8G4-E-2-N-M8G4 |
| | | | | 5.0 m 8065108 NEBL-M8G4-E-5-N-M8G4 |
| | | | | 7.5 m 8065111 NEBL-M8G4-E-7.5-N-M8G4 |
| | | | | 10.0 m 8065115 NEBL-M8G4-E-10-N-M8G4 |
| | | | | 15.0 m 8065119 NEBL-M8G4-E-15-N-M8G4 |
| | Angled socket, M8x1, 4-pin, A-coded | Angled plug, M8x1, 4-pin, A-coded | Angled plug, M8x1, 4-pin, A-coded | 0.3 m 8146577 NEBL-M8W4-E-0.3-N-M8W4 |
| | | | | 0.5 m 8065103 NEBL-M8W4-E-0.5-N-M8W4 |
| | | | | 1.0 m 8065105 NEBL-M8W4-E-1-N-M8W4 |
| | | | | 2.0 m 8065107 NEBL-M8W4-E-2-N-M8W4 |
| | | | | 5.0 m 8065109 NEBL-M8W4-E-5-N-M8W4 |
| | | | | 7.5 m 8065112 NEBL-M8W4-E-7.5-N-M8W4 |
| | | | | 10.0 m 8065116 NEBL-M8W4-E-10-N-M8W4 |
| | | | | 15.0 m 8065120 NEBL-M8W4-E-15-N-M8W4 |

Datasheet – Electrical interface for valve terminal VTUG

| Ordering data – Accessories | | Description | Pack size | Part no. | Type |
|--|--------------------------------|--|-----------|----------|--------------------|
| Inscription labels | | | | | |
|  | For modules CPX-AP-I | Size 6x 12.5 mm, 10 frames with 24 pieces each | 240 | 8087174 | ASLR-L-X4-612-P240 |
| Cover cap | | | | | |
|  | For sealing unused connections | For connection M8x1 | 10 | 177672 | ISK-M8 |

Datasheet – Electrical interface for valve terminal MPA-L

- Function**
- With the electrical interface, a valve terminal MPA-L can be operated as part of the remote I/O system CPX-AP-I.
- Indication of status and error messages via LED indicators
 - Up to 32 valve positions with up to 32 solenoid coils
 - Separate load voltage supply for the connected valves; can be disconnected separately
 - Short-circuit disconnection, short-circuit diagnostics and switching cycle counter

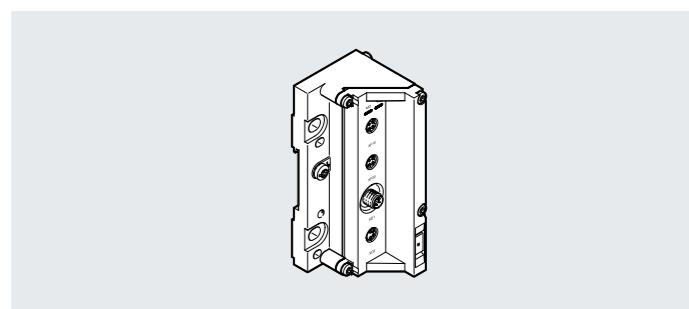

General technical data – End plate for valve terminal MPA-L

| | |
|--------------------------------|--------------------------|
| Valve terminal design | Valve sizes can be mixed |
| Max. number of valve positions | 32 |
| Max. no. of solenoid coils | 32 |

Communication interface – End plate for valve terminal MPA-L

| | |
|--|---|
| Communication interface, protocol | AP-COM |
| Communication interface, function | System communication XF10 IN / XF20 OUT |
| Communication interface, connection type | 2 x socket |
| Communication interface, connection technology | M8x1, D-coded to EN 61076-2-114 |
| Communication interface, number of pins/cores | 4 |
| Communication interface, shielding | Yes |

General data – End plate for valve terminal MPA-L

| | |
|--|---|
| Diagnostics via LED | Diagnostics per module Power supply load |
| Diagnostics via internal communication | Electronics/sensors overvoltage Electronics/sensors undervoltage |
| Max. cable length | 50 m system communication |

Technical data – Electrical – End plate for valve terminal MPA-L

| | |
|---|--------------------------------------|
| Nominal operating voltage DC for electronics/sensors | 24 V |
| Permissible voltage fluctuations, electronics/sensors | ± 25% |
| Nominal operating voltage DC load | 24 V |
| Permissible voltage fluctuations, load | ± 10% |
| Power failure buffering | 10 ms |
| Max. power supply | 2 x 4 A (external fuse required) |
| Fuse protection (short circuit) | Internal electronic fuse per channel |
| Protection against direct and indirect contact | PELV, SELV |
| Reverse polarity protection | Yes |
| Intrinsic current consumption at nominal operating voltage, electronics/sensors | Typical 30 mA |
| Intrinsic current consumption at nominal operating voltage, load | Typical 15 mA |
| Electrical isolation of outputs between channel - internal communication | Yes |

Electrical connection – Power supply – End plate for valve terminal MPA-L

| | |
|-------------------------------------|---------------------------------------|
| Power supply, function | Incoming electronics/sensors and load |
| Power supply, connection type | Plug |
| Power supply, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power supply, number of pins/cores | 4 |

Electrical connection – Voltage transmission – End plate for valve terminal MPA-L

| | |
|---|---------------------------------------|
| Power transmission, function | Outgoing electronics/sensors and load |
| Power transmission, connection type | Socket |
| Power transmission, connection technology | M8x1, A-coded to EN 61076-2-104 |
| Power transmission, number of pins/cores | 4 |

Datasheet – Electrical interface for valve terminal MPA-L

Technical data – Mechanical – End plate for valve terminal MPA-L

| | |
|----------------------|------------------------------|
| Type of mounting | Tie rods |
| Connection position | On top |
| Product weight | 194 g |
| Dimensions W x L x H | 43.1 mm x 107.5 mm x 50.2 mm |

Materials – End plate for valve terminal MPA-L

| | |
|--------------------------|---|
| Housing material | Painted die cast aluminium Reinforced PA |
| Threaded sleeve material | Nickel-plated brass |
| Note on materials | RoHS-compliant |
| LABS (PWIS) conformity | VDMA24364-B1/B2-L |


Operating and environmental conditions – End plate for valve terminal MPA-L

| | |
|--|---|
| Ambient temperature | -5 ... 50 °C |
| Storage temperature | -40 ... 70 °C |
| Corrosion resistance class CRC ¹⁾ | 3 - High corrosion stress |
| Relative humidity | 5 - 95%, non-condensing |
| Nominal operating altitude | <= 2000 m NHN |
| CE marking (see declaration of conformity) ²⁾ | To EU EMC Directive To EU RoHS Directive |
| UKCA marking (see declaration of conformity) ³⁾ | To UK EMC regulations To UK RoHS regulations |
| KC marking | KC EMC |
| Certification | RCM |
| Degree of protection | IP65; IP67 |
| Note on degree of protection | In assembled state, unused connections closed |

1) More information www.festo.com/x/topic/crc2) More information www.festo.com/catalogue/... Support/downloads.3) More information www.festo.com/catalogue/... Support/downloads.

Datasheet – Electrical interface for valve terminal MPA-L


Connection and display components

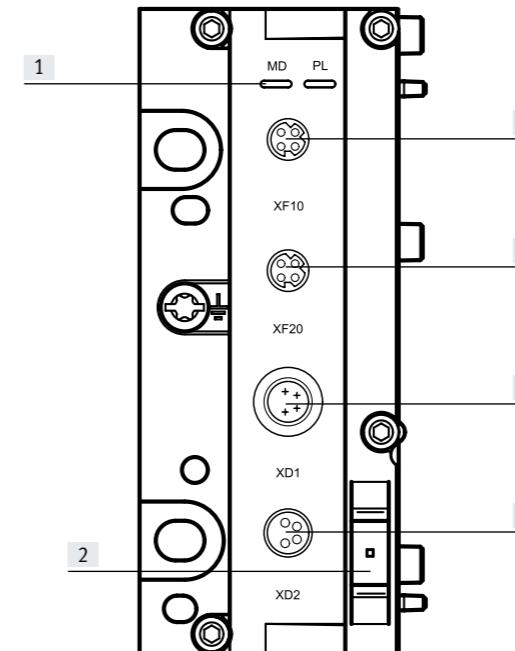

- [1] LED indicators
- [2] Space for inscription label
- [3] Communication interface
- [4] Communication interface 2
- [5] Electrical connection, power supply
- [6] Electrical connection, power transmission

Download CAD data → www.festo.com


Dimensions

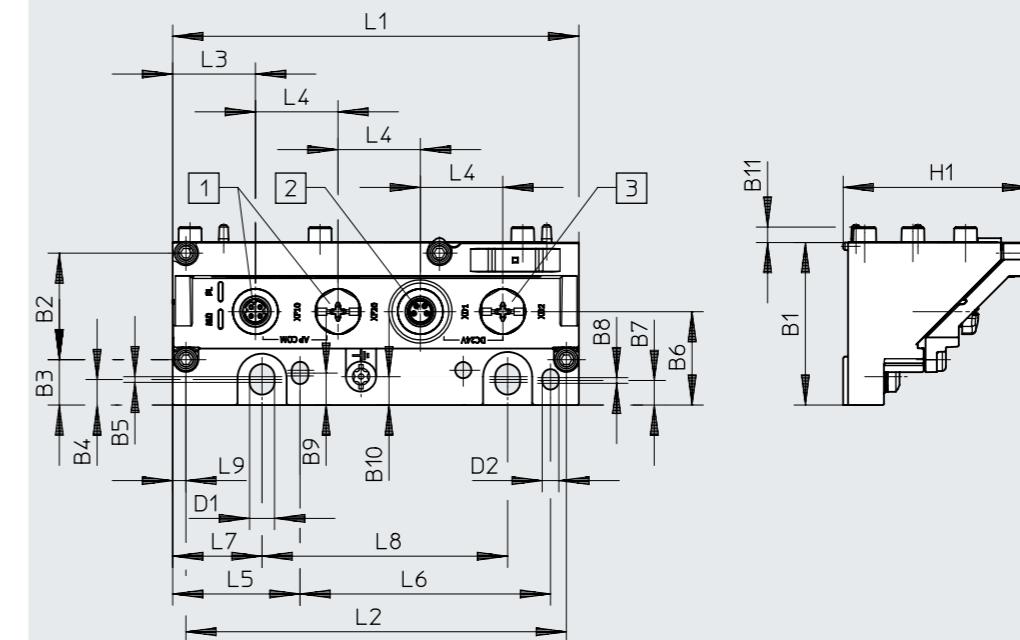

[1] Socket M8x1, D-coded

[2] Plug M8x1, A-coded


[3] Socket M8x1, A-coded




| | B1 | B2 | B3 | B4 | B5 | B6 | B7 | B8 | B9 | B10 | B11 | D1 | D2 | H1 |
|--------------|----|------|----|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|------|
| VMPAL-EPL-AP | 43 | 28.2 | 12 | 6.8 | 1.5 | 24.7 | 6.5 | 1.5 | 8.5 | 7.5 | 4.1 | 6.6 | 4.4 | 50.2 |

| | L1 | L2 | L3 | L4 | L5 | L6 | L7 | L8 | L9 |
|--------------|-------|-------|------|------|------|------|------|----|-----|
| VMPAL-EPL-AP | 107.5 | 100.7 | 21.9 | 21.8 | 33.7 | 66.3 | 23.7 | 65 | 3.5 |

Datasheet – Electrical interface for valve terminal MPA-L

| Ordering data | | Part no. | Type | | | |
|---|---|-------------------------------------|-------------------------------------|--|--|---|
|  | Electrical interface for valve terminal MPA-L | 32 valve positions | 8087171 VMPAL-EPL-AP | | | |
| Ordering data – Accessories | | | | | | |
| Description | | Part no. | Type | | | |
| Connecting cable | | | | | | |
|  | For communication interface | Straight plug, M8x1, 4-pin, D-coded | Straight plug, M8x1, 4-pin, D-coded | 0.3 m 0.5 m 1.0 m 2.0 m 5.0 m 7.5 m 10.0 m 15.0 m 20.0 m 25.0 m 30.0 m 40.0 m 50.0 m | 8082902 8065123 8065125 8065127 8065129 8065131 8065133 8065135 8146031 8146032 8146033 8146034 8146035 | NEBC-D8G4-ES-0.3-N-S-D8G4-ET NEBC-D8G4-ES-0.5-N-S-D8G4-ET NEBC-D8G4-ES-1-N-S-D8G4-ET NEBC-D8G4-ES-2-N-S-D8G4-ET NEBC-D8G4-ES-5-N-S-D8G4-ET NEBC-D8G4-ES-7.5-N-S-D8G4-ET NEBC-D8G4-ES-10-N-S-D8G4-ET NEBC-D8G4-ES-15-N-S-D8G4-ET NEBC-D8G4-ES-20-N-S-D8G4-ET NEBC-D8G4-ES-25-N-S-D8G4-ET NEBC-D8G4-ES-30-N-S-D8G4-ET NEBC-D8G4-ES-40-N-S-D8G4-ET NEBC-D8G4-ES-50-N-S-D8G4-ET |
| | | Angled plug, M8x1, 4-pin, D-coded | Angled plug, M8x1, 4-pin, D-coded | 0.5 m 1.0 m 2.0 m 5.0 m 7.5 m 10.0 m 15.0 m 20.0 m 25.0 m 30.0 m 40.0 m 50.0 m | 8065124 8065126 8065128 8065130 8065132 8065134 8065136 8146036 8146037 8146038 8146039 8146040 | NEBC-D8W4-ES-0.5-N-S-D8W4-ET NEBC-D8W4-ES-1-N-S-D8W4-ET NEBC-D8W4-ES-2-N-S-D8W4-ET NEBC-D8W4-ES-5-N-S-D8W4-ET NEBC-D8W4-ES-7.5-N-S-D8W4-ET NEBC-D8W4-ES-10-N-S-D8W4-ET NEBC-D8W4-ES-15-N-S-D8W4-ET NEBC-D8W4-ES-20-N-S-D8W4-ET NEBC-D8W4-ES-25-N-S-D8W4-ET NEBC-D8W4-ES-30-N-S-D8W4-ET NEBC-D8W4-ES-40-N-S-D8W4-ET NEBC-D8W4-ES-50-N-S-D8W4-ET |

Datasheet – Electrical interface for valve terminal MPA-L

| Ordering data – Accessories | | Description | Part no. | Type |
|---|--------------------------------|--|-------------------------------------|--|
| Connecting cable | | | | |
|  | For power supply | Straight socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 5.0 m 7.5 m 10.0 m 15.0 m |
|  | | Angled socket, M8x1, 4-pin, A-coded | Open cable end, 4-core | 7.5 m 10.0 m 15.0 m |
|  | For power transmission | Straight socket, M8x1, 4-pin, A-coded | Straight plug, M8x1, 4-pin, A-coded | 0.3 m 0.5 m 1.0 m 2.0 m 5.0 m 7.5 m 10.0 m 15.0 m |
|  | | Angled socket, M8x1, 4-pin, A-coded | Angled plug, M8x1, 4-pin, A-coded | 0.3 m 0.5 m 1.0 m 2.0 m 5.0 m 7.5 m 10.0 m 15.0 m |
| Ordering data – Accessories | | Description | Pack size | Part no. |
| Inscription labels | | | | |
|  | For modules CPX-AP-I | Size 6x 12.5 mm, 10 frames with 24 pieces each | 240 | 8087174 ASLR-L-X4-612-P240 |
| Cover cap | | | | |
|  | For sealing unused connections | For connection M8x1 | 10 | 177672 ISK-M8 |