


VSVA-Pulsing Valve VSVA-B-T32C-AZD-D1-1R5L-CS

VSVA-B-T32C-AZD-
D1-1R5L-CS
T.-Nr.-8109239

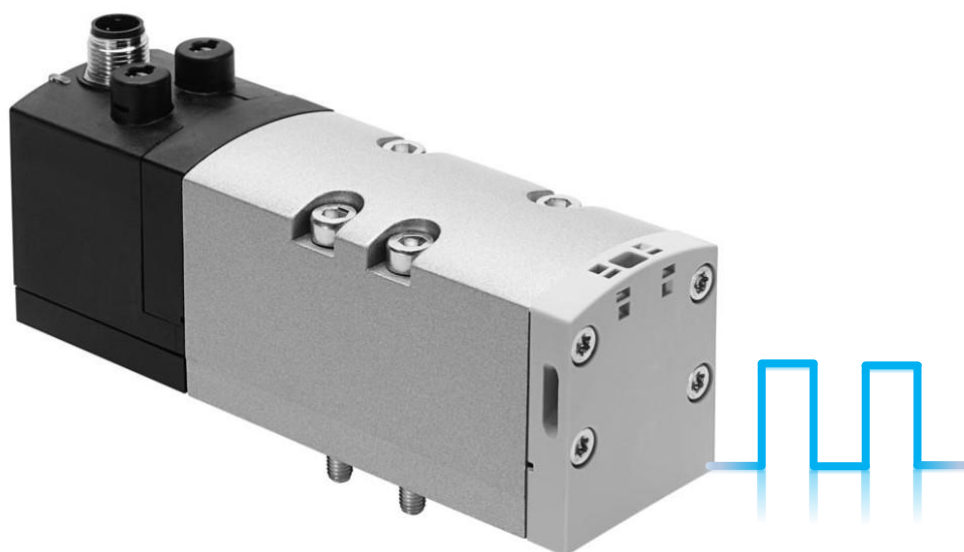

Title VSVA-Pulsing Valve
Version 1.3
Document number 100315
Original de
Author Festo
Last saving date..... 06.10.2021

Copyright Notice

These documents are the intellectual property of Festo SE & Co. KG, which also holds the exclusive copyright to them. Any change to the content, reproduction or reprinting of these documents and their transfer to third parties is only permitted with the express permission of Festo SE & Co. KG is permitted.

Festo SE & Co. KG reserves the right to change this document in whole or in part. All brand and product names are trademarks or registered trademarks of the respective titleholders.

Legal Notice

Hardware, software, operating systems and drivers may only be used for the applications described and only in connection with the products and services offered by Festo SE & Co. KG and only in conjunction with the components recommended by Festo SE & Co.

Festo SE & Co. KG declines all liability for damage resulting from the use of possibly incorrect or insufficient information or due to missing information in these documents.

Defects resulting from improper handling of devices and assemblies are excluded from the warranty.

Safety-relevant functions, in the sense of personal and machine protection, must not be implemented with the data and information in this document.

No liability is accepted for consequential damage resulting from a failure or malfunction. In all other respects, the provisions regarding liability in the terms of delivery, payment and software use of Festo SE & Co. KG, which you will find at www.festo.com , but which we will also be happy to send you on request.

None of the data provided in this document are guaranteed characteristics, in particular not for functionality, condition or quality in the legal sense.

The information in this document is only to be considered as simple instructions for the implementation of a specific, hypothetical application, and in no case as a replacement for the operating instructions of the respective manufacturer or the design and testing of the user's own application.

The respective operating instructions for Festo products can be found at www.festo.com/sp .

The user of this document (function and application) must himself ensure that each function described here also functions properly in his application. The user remains solely responsible for his own application even after studying this document and using the information contained herein.

Table of contents

1	Introduction	5
2	Connectors	6
2.1	Control Signals	6
2.2	Pneumatic symbols	6
2.3	Collected / uncollected control exhaust air	7
3	Setup the VSVA pulse valve.....	8
3.1	Valve functions	9
3.1.1	Mode 1: Standard mode of the valves	9
3.1.2	Mode 2: Pulse operation of the valves	10
3.1.3	Mode 3: Puls mode inverted	11

1 Introduction



Installation, commissioning, maintenance and removal only by qualified personnel.
The specialist personnel must be familiar with the installation of electrical and pneumatic control systems.



Installation requires a qualified electrician.
Operation only permitted with 24V DC PELV power supply.



For technical questions, please contact your regional Festo contact
→ www.festo.com.

Solenoid valves suitable for standard connection diagram according to ISO 5599-1 with central connector and cycle function. The VSVA-B-... solenoid valve with pulse function is a monostable 2x3/2 VSVA-ISO1 valve which is designed after connecting to 24V on the input of the respective magnet, automatically cycles with preset frequency and pulse-pause ratio.

With the use of the pulsing function, stronger blowing pulses can be achieved when used as a blowing air valve, and compressed air can be saved during the off-time. Possible areas of application are cleaning in case of chips and dust contamination, drying and transporting parts.

The technical data can be taken from the data sheet of the "Standard valves ISO 5599-1, central plug M12 3-pin". Reference valve: 561369 VSVA-B-T32C-AZD-D1-1R5L

The B10 value for the VSVA-B-T32C-AZD-D1-1R5L-CS TN:8109239 is 50 million operations



Both 3/2 valves can also be actuated in parallel to doubling the flowrate
The valve needs external pilot air at connection 14

2 Connectors

2.1 Control Signals

The control signals require a voltage of 24V +/-10%.

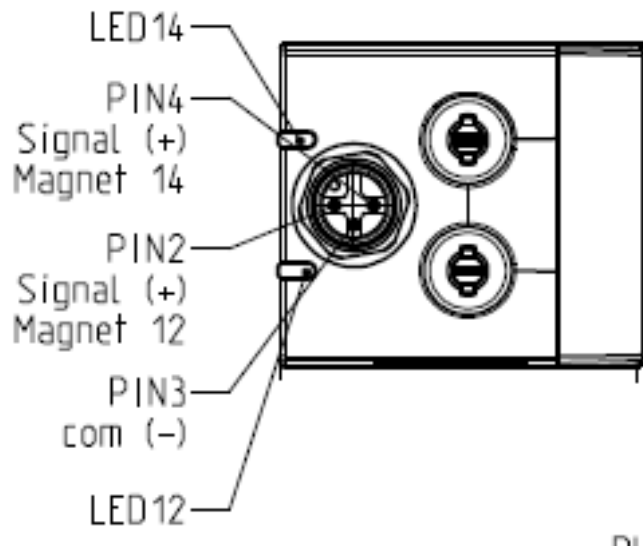


Fig.1: electric connection

2.2 Pneumatic symbols

Design: 2x 3/2-way valve, 2x normally closed 2x, type of reset: pneumatic spring



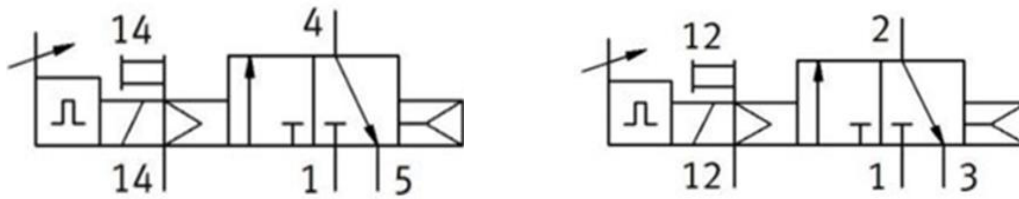


Fig 2: pneumatic symbols

2.3 Collected / uncollected control exhaust air

By turning the seal, the control exhaust air can be collected (upper figure).
The lower figure corresponds to the standard. In the standard position of the seal,
the control exhaust air is not collected.

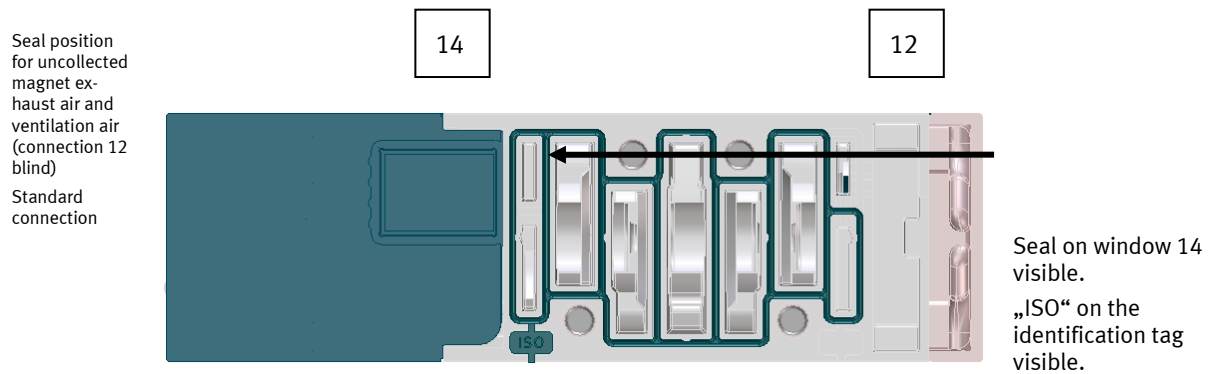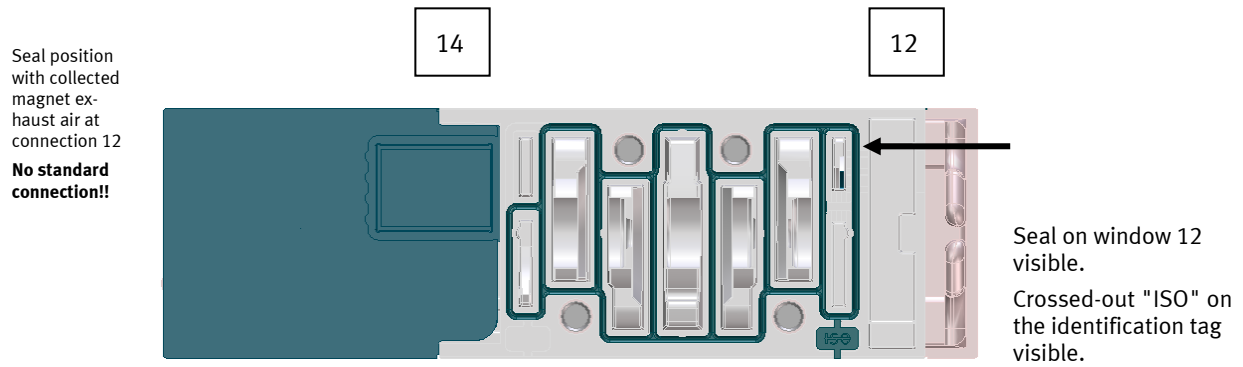

3 Setup the VSVA pulse valve

The function of the valve can be adjusted via two rotary switches located on the rear side.

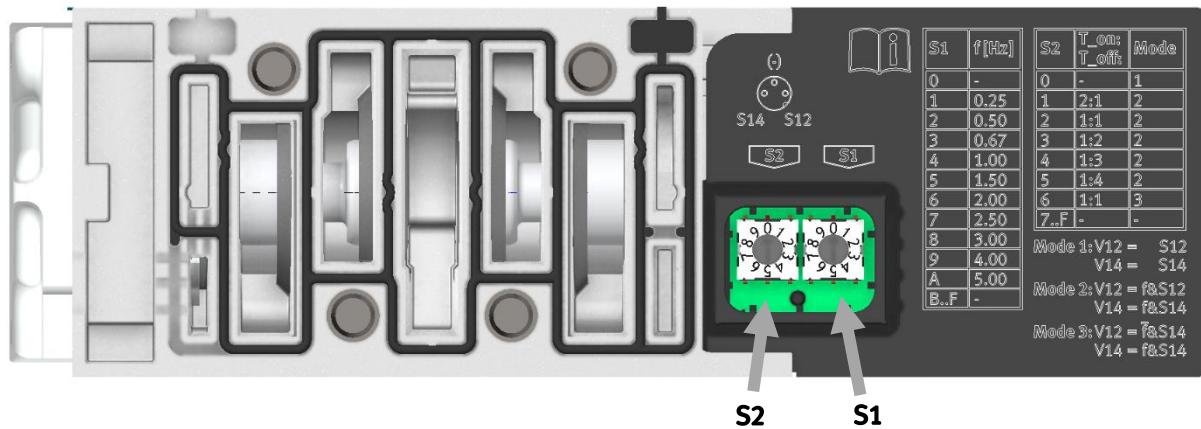


Fig. 1: Setting switches

The possible functions can also be seen on the attached label on the back.

S1	f [Hz]	S2	T_on	T_off	Mode
0	-	0	-	-	1
1	0.25	1	2:1	2	2
2	0.50	2	1:1	2	2
3	0.67	3	1:2	2	2
4	1.00	4	1:3	2	2
5	1.50	5	1:4	2	2
6	2.00	6	1:1	3	3
7	2.50	7..F	-	-	-
8	3.00				
9	4.00				
A	5.00				
B..F	-				

Mode 1: V12 = S12
V14 = S14
Mode 2: V12 = f&S12
V14 = f&S14
Mode 3: V12 = $\bar{f}$ &S14
V14 = f&S14

Example

Rotary Switch S1: Position 1 (0.25 Hz)

Rotary Switch S2: Position 2 (1:1 T_on:T_off)

Puls pattern:

frequency $f = 0.25 \text{ Hz}$

→ Period duration: 4.0 s

Ratio T_on:T_off = 1:1

→ T_on: 2.0 s

→ T_off: 2.0 s

Fig.4: Label with configuration settings



New settings on S1 and S2 are only accepted internally after a restart of the valve

3.1 Valve functions

3.1.1 Mode 1: Standard mode of the valves

Switch positions: $S1 = 0$; $S2 = 0$

The user can control both valves separately via the two inputs PIN2 and PIN4.

The status LED of the respective valve lights up continuously as long as a signal is present at the respective input.

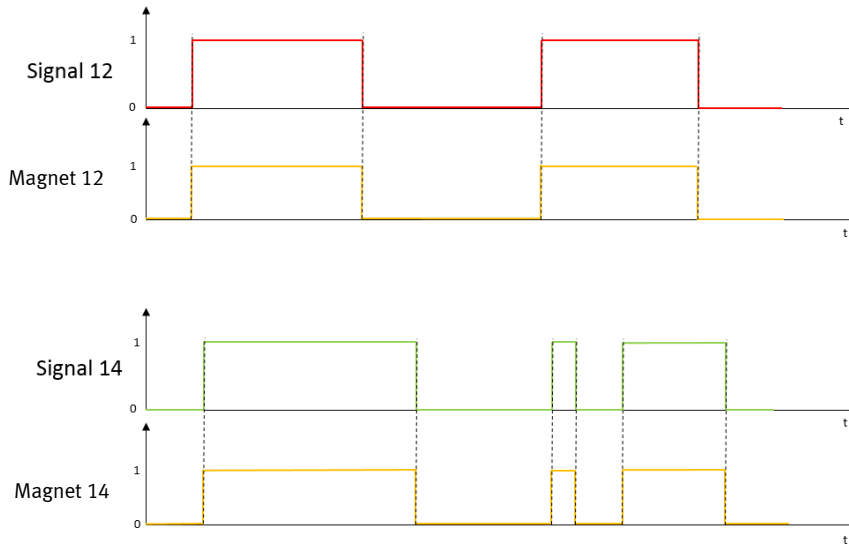


Fig. 5: Switching characteristics Mode 1

3.1.2 Mode 2: Pulse operation of the valves

Switch positions: S1 = 1 ... A; S2 = 1 ... 5

Both valves can be clocked via adjustable, fixed frequencies.

The pulse/pause ratio ($t_{ON}:t_{OFF}$) is adjustable.

Example: S1 = 5 and S2 = 3

With a ratio of 1:2, one section is switched on and two sections are switched off.

$$t = \frac{1}{f * (t_{on} + t_{off})} = \frac{1}{1,5Hz * (1 + 2)} = 0,22s$$

$$t_{on} = 1 * t = 1 * 0,22s = 0,22s$$

$$t_{off} = 2 * t = 2 * 0,22s = 0,44s$$

This results in a switch-on pulse of 0.22s and a pause of 0.44s


The status LED of the respective valve lights up continuously as long as a signal is present at the selected input.

The valves clock synchronously. If a signal is applied to the switching input, the valve will always switch on the next positive clock pulse flank (see figure 6).

Overview setting options frequency / pulse duration

			S2					
			0	1	2	3	4	5
			x	2:1	1:1	1:2	1:3	1:4
S1	0	x	x	x	x	x	x	x
	1	0,25 Hz	x	2,64 s	2,00 s	1,32 s	1,00 s	0,80 s
	2	0,5 Hz	x	1,32 s	1,00 s	0,66 s	0,50 s	0,40 s
	3	0,66 Hz	x	1,00 s	0,75 s	0,50 s	0,375 s	0,30 s
	4	1,0 Hz	x	0,66 s	0,50 s	0,33 s	0,25 s	0,20 s
	5	1,5 Hz	x	0,44 s	0,333 s	0,22 s	0,167 s	0,133 s
	6	2,0 Hz	x	0,33 s	0,25 s	0,165 s	0,125 s	0,10 s
	7	2,5 Hz	x	0,264 s	0,20 s	0,132 s	0,10 s	0,08 s
	8	3,0 Hz	x	0,22 s	0,167 s	0,11 s	0,083 s	0,067 s
	9	4,0 Hz	x	0,165 s	0,125 s	0,083 s	0,063 s	0,05 s
	A	5,0 Hz	x	0,132 s	0,10 s	0,066 s	0,05 s	0,04 s

Table 1: Values Mode 2

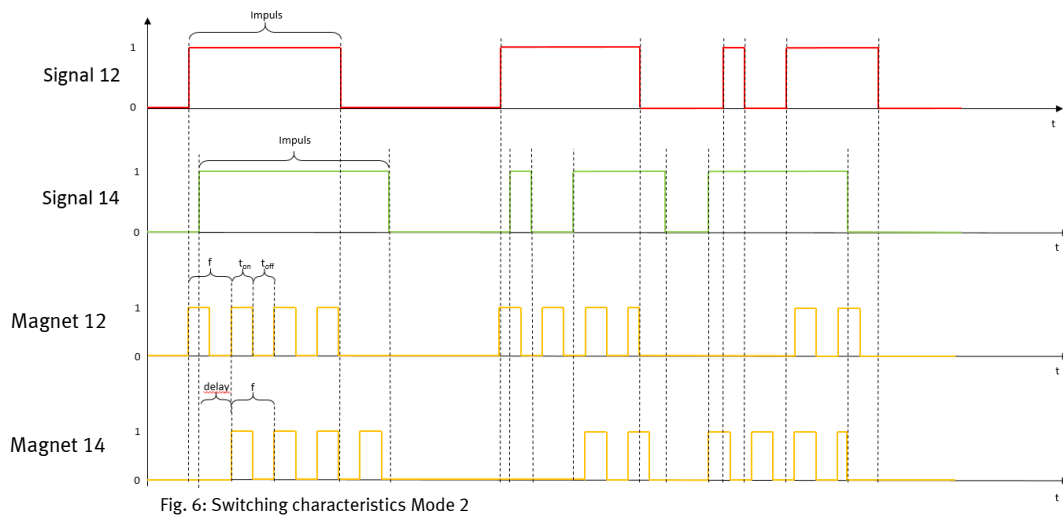

Both 3/2 valves can also be actuated in parallel to doubling the flowrate

3.1.3 Mode 3: Puls mode inverted

Switch positions: S1 = 1 ... A; S2 = 6

The valves clock alternately, the valves are controlled via Pin4. Pin2 has no function in this mode. Both LEDs (LED 12 and LED 14) are permanently lit as long as a signal is present at Pin4.

possible application: Cyclic switching of double-acting pneumatic drives.

Overview setting options frequency / pulse duration

		S2	
		6	
		1:1 inv.	
S1	0	x	x
	1	0,25 Hz	2,00 s
	2	0,5 Hz	1,00 s
	3	0,66 Hz	0,75 s
	4	1,0 Hz	0,50 s
	5	1,5 Hz	0,333 s
	6	2,0 Hz	0,25 s
	7	2,5 Hz	0,20 s
	8	3,0 Hz	0,167 s
	9	4,0 Hz	0,125 s
	A	5,0 Hz	0,10 s

Table 2: Values mode 3

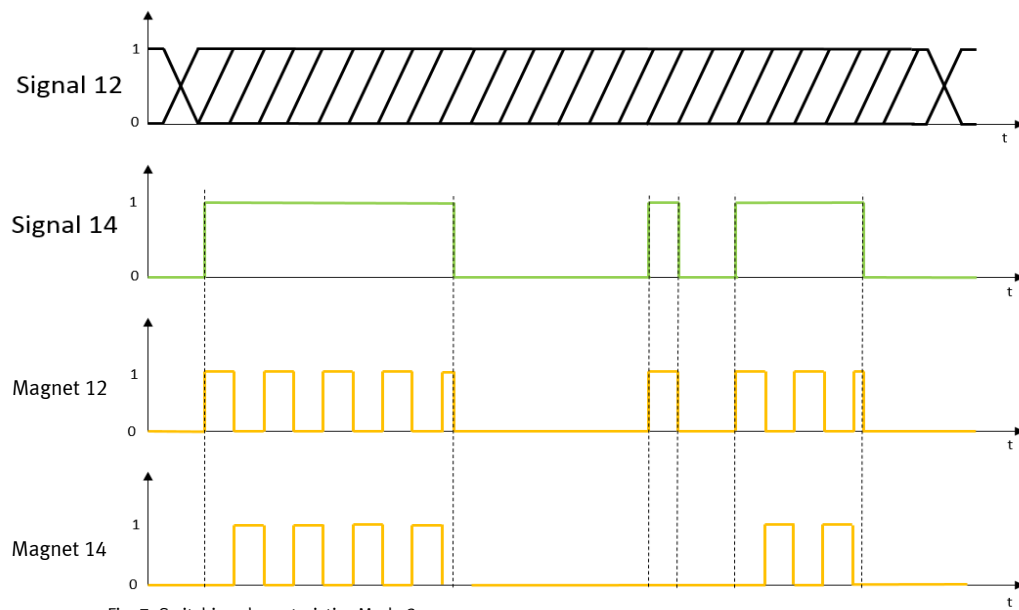


Fig. 7: Switching characteristics Mode 3



All other switch positions (S1: A ... F; S2: 7 ... F) are reserved for future functions. If an invalid switch position is selected, the valves are switched off and the LEDs flash alternately at 3 Hz. The input signals then have no function.